

MiniXtend® Cable with Binderless* FastAccess™ Technology

72 F, SMF-28® Ultra fibre, Single-mode (G.652.D/G.657.A1)

CORNING

Corning MiniXtend® Cable with Binderless* FastAccess™ Technology is an all-dielectric loose tube cable designed for microduct applications and features industry-leading fibre density.

The innovative Binderless FastAccess Technology improves cable handling and reduces access time up to 70% while lowering risk of cable and fibre damage.

The MiniXtend Cable design reduces the cable diameter by up to 50% (versus traditional loose tube cables) which improves fibre density for duct applications and also enables new applications which can reduce total install cost by up to 60%.

This cable also features Corning SMF-28® Ultra single-mode fibre which combines industry-leading attenuation and improved macrobend performance in one fibre. SMF-28 Ultra fibre is ITU-T Recommendation G.652.D compliant and also exceeds the requirements of the ITU-T Recommendation G.657.A1 standard.

** Corning's patented Binderless FastAccess® Technology refers to the combination of a Corning FastAccess Technology jacket with an innovative technology used to bind cable construction through the manufacturing process, eliminating the use of binder yarns and waterblocking tapes.*

Features and Benefits

Binderless* FastAccess™ Technology

Innovative cable design that reduces cable access time up to 70 percent and lowers the risk of inadvertent fibre damage

Improved cable and fiber density

Small cable OD enables higher density and lower deployment cost; up to 96 fibres in 8 mm ID duct and up to 144 fibers in 10 mm ID duct

Optimised for air-assisted install in microducts

Capable of installation distances greater than 2000 m (6560 ft) at speeds up to 150 m/min (490 ft/min)

Mid-span express buffer tube performance


Meets the Telcordia GR-20 and RDUP/RUS PE-90 requirements for mid-span express buffer tube storage

SMF-28® Ultra fibre

ITU-T G.652.D/G.657.A1 rated fibre with improved attenuation and bend performance as well as compatibility with standard single-mode fibres



Part Number: 072ZM4-T3F22AMX

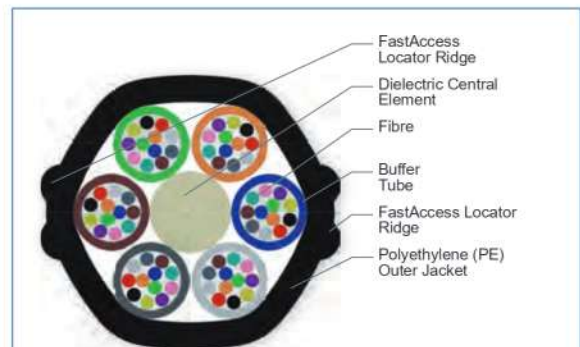

Cross Section of Order Number: 072ZM4-T3F22AMX

MiniXtend® Cable with Binderless* FastAccess™ Technology

72 F, SMF-28® Ultra fibre, Single-mode (G.652.D/G.657.A1)

CORNING

Standards

Common Installations Outdoor microduct; indoor when installed according to National Electrical Code® (NEC®) Article 770

Design And Test Criteria IEC 60794-5-10

Specifications

General Specifications	
Environment	Outdoor
Application	Microduct
Cable type	Stranded Loose Tube Micro Cable
Product type	Dielectric
Fibre Category	SMF-28® Ultra 242 Optical Fibre

Temperature Range	
Storage	-40 °C to 70 °C
Installation and assembly	-15 °C to 60 °C
Operation	-40 °C to 70 °C

Cable Design	
Central Element	Dielectric
Fibre Count	72
Fibre colouring	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink, Turquoise
Fibres per tube	12
Number of Tube Positions	6
Number of Active Tubes	6
Buffer tube colour coding	Blue, Orange, Green, Brown, Grey, White
Buffer tube diameter	1.4 mm (0.05 in)
Number of filling elements	0
Outer jacket material	High Density Polyethylene (HDPE)
Outer jacket colour	Black

MiniXtend® Cable with Binderless* FastAccess™ Technology

72 F, SMF-28® Ultra fibre, Single-mode (G.652.D/G.657.A1)

CORNING

Mechanical Characteristics Cable

Weight	23 kg/km
Nominal Outer Diameter	5.3 mm
Min. Bend Radius Installation	106 mm
Min. Bend Radius Operation	80 mm
Max. tensile strength, short-term	350 N

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Fibre Specifications

Optical Characteristics (cabled)

Fibre name	SMF-28® Ultra 242 Optical Fibre
Mode-Field Diameter at 1310 nm	9.2 µm
Fibre code	Z
Coating diameter	242 µm
Cladding diameter	125 µm
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum attenuation	0.34 dB/km / 0.34 dB/km / 0.20 dB/km
Typical attenuation	0.32 dB/km / 0.32 dB/km / 0.18 dB/km
Serial 1 gigabit ethernet	5000 m / -
Serial 10 gigabit ethernet	10000 m / 40000 m
Cable cutoff wavelength	1260 nm
Dispersion in the range 1285 to 1330 nm	≤ 3.5 ps / (nm * km)
Dispersion @ 1550 nm	≤ 18 ps / (nm * km)
PMD Link Design Value	≤ 0.04 PS / √km
PMD maximum individual fibre	≤ 0.1 PS / √km
Fibre compliance	ITU-T G.652.D and ITU-T G.657.A1

Notes: 1) Contact a Corning Customer Care Representative for additional information

MiniXtend® Cable with Binderless* FastAccess™ Technology

72 F, SMF-28® Ultra fibre, Single-mode (G.652.D/G.657.A1)



Ordering Information

Part Number	072ZM4-T3F22AMX
Product Description	MiniXtend® Cable with Binderless* FastAccess™ Technology, 72 F, SMF-28® Ultra fibre, Single-mode (G.652.D/G.657.A1)
EAN Code	4056418046631



Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY

00 800 2676 4641 · FAX: +49 30 5303 2335 · www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at

www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified.

© 2017 Corning Optical Communications. All rights reserved.