

MiniXtend® Cable, LT, A-DQ(ZN)2Y 8x12 E9/125 (OS2)

CORNING

Part Number:
096EM4-T3122A20

Corning MiniXtend products are fiber optic stranded loose tube or central tube fully dielectric outdoor cable typically used in Long-Haul, Metro- or Access Networks when limited space is available.

With the dual layer tube design and low friction PE sheath MiniXtend cables are optimized for blowing and best used in mini or micro ducts.

The buffer tubes and fiber in each tube are color-coded for quick and easy identification. MiniXtend are available with Corning Single Mode Fiber SMF 28e+® & SMF 28e® ULTRA (ITU-G 652D) or bend improved ClearCurve® fibers (ITU-G 657).

Features and Benefits

Reduced outer cable diameter

High fibre density in microduct systems

Compact and light

CapEx-optimised installations & upgrades

Optimised cable stiffness

Long installation lengths

Fully-dielectric


No grounding required

Colour-coded tubes & fibres

Easy identification of tubes & fibres

SMF-28e+® according to ITU-T G.652.D

Transmission security, low attenuation and polarization mode dispersion

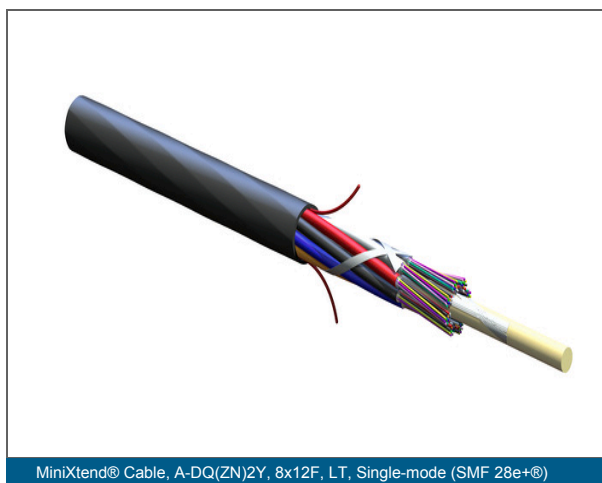

MiniXtend® Cable, LT, A-DQ(ZN)2Y 8x12 E9/125 (OS2)

CORNING

Specifications

Mechanical Specifications

Crush resistance	1000 N/10 cm
Max. tensile strength, short-term	1000 N
Min. bend radius installation	126 mm
Min. bend radius operation	94.5 mm
Nominal outer diameter	6.3 mm
Water penetration (0.1bar/24 h)	1 m

Cable Design

Cable marking	Metre - Handset - Sine - CORNING - Year -MINIXTEND (R) CABLE 8X12 E9/125 LT 1.4
Central element	Dielectric
Fibre count	96
Number of ripcords	2
Outer jacket colour	Black
Outer jacket material	High Density Polyethylene (HDPE)
Outer jacket nominal thickness	0.5 mm
Buffer tube diameter	1.4 mm
Number of active tubes	8
Number of tube positions	8
Tape	Water-swellable
Fibre colouring	Blue, orange, green, brown, grey, white, red, black, yellow, violet, pink, turquoise
Fibres per tube	12

Environmental Conditions

Temperature range, installation	-5 °C to 40 °C
Temperature range, storage	-30 °C to 70 °C

MiniXtend® Cable, LT, A-DQ(ZN)2Y 8x12 E9/125 (OS2)

CORNING

Environmental Conditions

Temperature range, operation	-30 °C to 70 °C
------------------------------	-----------------

General Specifications

Environment	Outdoor
Cable type	Stranded Loose Tube
Product type	Dielectric
Fibre category	Single-mode (OS2)
Application	Miniduct

Ordering Information

Product Number	096EM4-T3122A20
EAN Code	4056418062945
Maximum delivery length	4000 m
Weight	35 kg/km

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Standards

Fibre Standards	TIA/EIA-492CAAB, IEC 60793-2-50 Type B1.3, ITU-T G.652.D, ISO/IEC 11801 Ed.2.2 Cat. OS2, IEC 60794-3:2001, Section 5.5, Method 1 (m=20, Q=0.01%)
-----------------	--

Optical Characteristics

Cable cutoff wavelength	1260 nm
Fibre code	E
Fibre name	E9/125 SMF28e+®

MiniXtend® Cable, LT, A-DQ(ZN)2Y 8x12 E9/125 (OS2)

CORNING

Optical Characteristics	
Fibre Type	Single-mode
Performance option code	22
Fibre core diameter	8.2 µm
Dispersion @ 1550 nm	18 nm
Dispersion in the range 1285 to 1330 nm	3.5 nm
Maximum Attenuation	0.36 dB/km / 0.36 dB/km / 0.22 dB/km
Mode-Field Diameter at 1310 nm	9.2 µm -0.4 / +0µm
Mode-Field Diameter at 1550 nm	10.4 µm -0.5 / +0µm
Wavelengths	1310 nm / 1383 nm / 1550 nm
PMD Link Design Value	0.06 ps/(nm*km)
Fibre category	OS2



Corning Optical Communications GmbH & Co. KG • Leipzig Strasse 121 • 10117 Berlin, Germany
+00 800 2675 4641 • FAX: +49 30 5303 2335 • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2022 Corning Optical Communications. All rights reserved.