


HS 4-way splitter



- Designed for panel mounting in headend applications
- Low loss and high return loss performance
- Exceeds EN Class A screening requirements
- CPD Safe™ - NiSn plated, zinc alloy casing and NiSn plated, machined brass input connector with NiSn plated F-inner spring

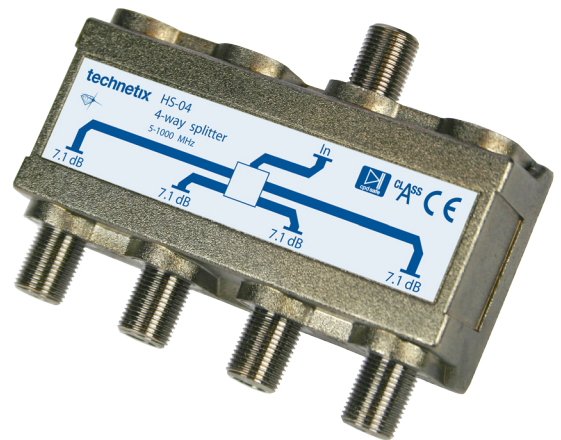

Overview

The HS-xx series of high quality splitters has been developed specifically for panel mounting in headend applications, providing a versatile solution for supporting many different headend solutions. The series consists of 2-, 4- and 8-way low cost, wideband splitters with a connector spacing suitable for use with the Technetix HPP-xxxF series of 19" 1RU, 1.5RU, 2RU and 3RU mounting panels.

Construction

- Tough, easy to install housing
- Epoxy sealed tongue and groove back cover
- F-connector inner spring designed for connecting coaxial cables with an inner conductor of 0.51mm to 1.30mm - it retains this elasticity, providing effective clamping force even when varying thicknesses of inner conductor are connected in succession.

CPD Safe

CPD (Common Path Distortion) is well known for producing signal interference on networks. It is caused by electrolytic corrosion or the oxidation of dissimilar metals when in close contact. CPD Safe technology protects against CPD:

- Removes a primary cause of CPD
- Reduces signal interference on the network
- Drives fewer reported faults
- Reduces truck rolls
- Improves customer service

EN Class A screening

High frequency shielding used on this product exceeds Class A requirements (EN 50083 2 2006) across the whole frequency range from 5MHz to 1000MHz.

Specifications

		MHz	Typ	Max
Insertion loss (dB)	In -> Out	5 - 10	6.7	7.2
		10 - 470	6.7	7.2
		470 - 862	7.1	7.9
		862 - 1000	7.4	8.3
Return loss (dB, min) ¹	In	5 - 10		20.0
		10 - 470		22.0
		470 - 862		22.0
		862 - 1000		14.0
	Out	5 - 10		20.0
		10 - 470		22.0
		470 - 862		22.0
		862 - 1000		14.0
Isolation (dB, min) ¹	Out -> Out	5 - 10		22.0
		10 - 470		22.0
		470 - 862		22.0
		862 - 1000		14.0
Screening efficiency (dB, min) ²		5 - 300		85.0
		300 - 470		80.0
		470 - 1000		75.0
Intermodulation p+q (dB, min)	No surge ³			-122.0
	25 V surge ⁴			-115.0
	1 kV surge ⁵			-105.0
Surge Class conformance ⁶				1 kV 1.2/50µS
Connectors ⁷	All ports			F-female
Material	Housing			NiSN plated Zinc die-cast
	F-spring			NiSN plated beryllium copper
Impedance (Ohm, typ)				75
Dimensions (mm)	L x H x D			
Equipment approval	CE			

Remarks

	All specifications are measured at room temperature (22°C)
1	Where frequency is above 40 MHz, deduct 1.5 dB/Octave
2	Tested according to EN 50083-2 2006
3	Two carriers (50 and 55 MHz) output to input @ 120 dBµV/60dBmV, before surge
4	Two carriers (50 and 55 MHz) output to input @ 120 dBµV/60dBmV, after 10 pulses (25 V/1.2µs rise time/500µs duration) at input port
5	Two carriers (50 and 55 MHz) output to input @ 120 dBµV/60dBmV, after 1 pulse (1 kV 1.2µs/50µs, IEC 61000-4-5 2005 level 2) at input port
6	Tested according to IEC 61000-4-5 2005
7	F-spring test pin acceptance 0.51mm min to 1.3mm max

Ordering information

Item Name	Article number
HS-04	19001788

© Copyright 2012 Technetix Group Limited. All rights reserved.

This document is for information only. Features and specifications are subject to change without notice. Technetix, the Technetix logo, Ingress Safe, Modem Safe and certain other marks and logos are trade marks or registered trade marks of Technetix Group Limited in the UK and certain other countries. Other brand and company names are trade marks of their respective owners. Technetix protects its technology and designs by registering patents, trade marks and designs in Europe and certain other countries.