

Patch panel HD, with grounding, empty



DESCRIPTION:

- Modular configuration system:
 - Possibility for FO/Cu assembling,
 - Rear bar for cable assembling
 - Optional cable manager installed at the front,
- Capacity: 8 slots for FO/Cu insertion
- Max ports density:
 - 48 ports/1U for copper
 - 192 ports for FO (for LCdx)
- Full range of connectors:
 - RJ45/s (shielded) – kat.5, kat.6. kat.6A
 - LCdx, SC – MM/SM

TECHNICAL SPECIFICATION

Material:

Frame – powder paint coated steel
Guidance – Plastic

Color:

Black RAL 9005

Temperature range

-40°C do +70°C

Ingress protection:

IP 20 Acc. to EN 60529.



Weight:

1,2 kg

Scope of supply:

Frame, empty

Type:	Patch panel HD	24.05.2020
		REV: 1
Ref:	XPS00	MSO

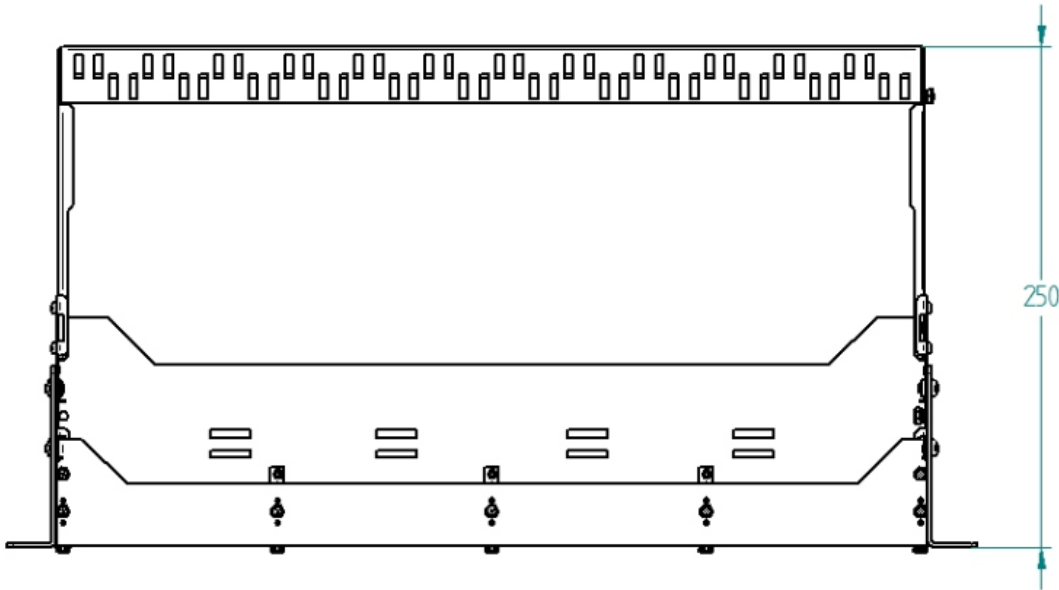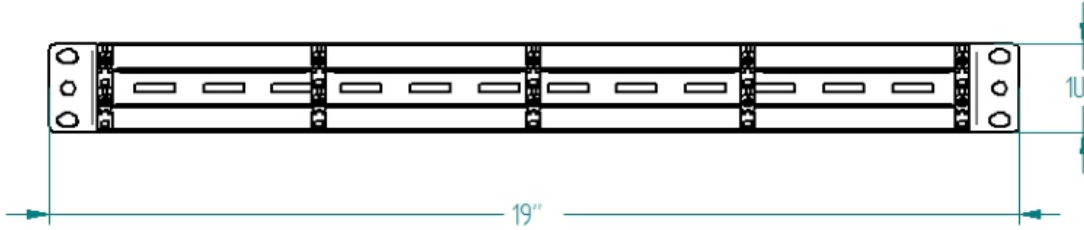

Dimensions			Reference number
Height [U = 44,45mm]	Width [inch]	Depth [mm]	
1 U	19	250	XPS00

This document and the statements contained in it, are not intended for customers within the meaning of Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only, and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot in any case be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.