




Technical datasheet for:

KKHR 32, 40 and 50

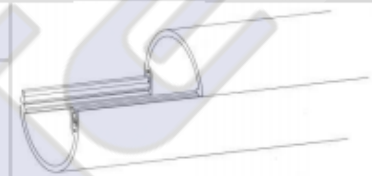

General data

Item	Split duct	
Description	Consists of 2 half shells, for pressure tight repair damages in PE duct or close blow in area in combination with EBM.	
Optional	To install the split ducts, it is necessary to use the according assembly tool.	
Package unit	KKHR Ø 32mm x 2000mm:	2 pieces / unit; 84 pieces / pallet
	KKHR Ø 40mm x 2000mm:	2 pieces / unit; 68 pieces / pallet
	KKHR Ø 50mm x 2000mm:	3 pieces / unit; 51 pieces / pallet
Production length	2000mm	

Technical data

Quality	Value	Unit
Material	PolyVinylChlorid - Unplastinized PVC-U	
Dimension	d = 32.0 ^{+0.2} ; s = 1.8 ^{+0.4}	mm
	d = 40.0 ^{+0.2} ; s = 1.9 ^{+0.4}	
	d = 50.0 ^{+0.2} ; s = 2.4 ^{+0.5}	
Pressure	0.5 (permanent gas- and watertight)	
	10 / 30	bar / min
	mastic (enclosed at the sleeves) is to use according installation instruction	