

**General Description:**


11 Series, Standard Shield, 60% Braid,  
 Meter, Reel Package

**Center Conductor:** Copper clad steel; 18% IACS min.  
**Nominal Diameter:** 0.064" (1.63 mm)

**Dielectric:** Closed cell foamed polyethylene  
**Nominal Diameter over Dielectric:** 0.280" (7.11 mm)

**Shield:**  
**1st Shield:** AP laminated tape bonded to dielectric  
**Nominal Diameter over Tape:** 0.288" (7.29 mm)  
**2nd Shield:** 34 AWG aluminum braid wire; 60% coverage

**Jacket:** Black PVC  
**Nominal Diameter over Jacket:** 0.400" (10.16 mm)

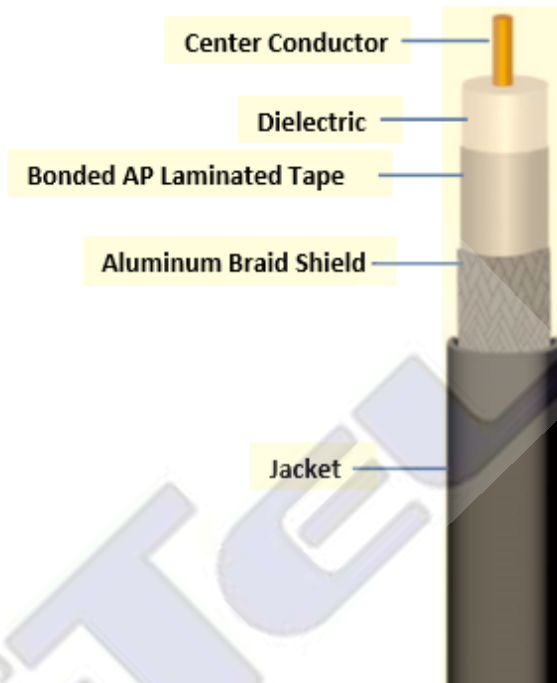

Frequency (MHz)	Maximum (dB/100ft)	Maximum (dB/100 m)
5	0.58	1.9
55	1.55	5.09
211	3.00	9.84
250	3.20	10.5
300	3.50	11.48
350	3.80	12.47
400	4.12	13.52
450	4.37	14.34
500	4.63	15.19
550	4.86	15.94
600	5.08	16.67
750	5.65	18.54
870	6.10	20.01
1000	6.54	21.46

NEC Rated: None

**Electrical Properties:**

**Impedance:** 75 +/- 3 Ohms  
**Velocity Propagation:** 85% Nominal

**Cable Length Per Reel:** 1,000 ft (305 m)

**Shipping Weight:** 64lbs/1,000 ft

**Packaging:** 18"x6"x11" (45.7x15x28 cm)

