

General Description:

11 Series, Tri-shield, 60% Braid, 0.072" Messenger
 Meter Marked, Reel Package

Center Conductor: Copper covered steel; 18% IACS min.
Nominal Diameter: 0.064" (1.63 mm)


Dielectric: Closed cell foamed polyethylene
Nominal Diameter over Dielectric: 0.280" (7.11 mm)

Shield:

1st Shield: AP laminated tape bonded to dielectric
Nominal Diameter over Tape: 0.288" (7.32 mm)
2nd Shield: 34 AWG aluminum braid wire; 60% coverage
3rd Shield: AP laminated tape

Jacket: Black PVC
Nominal Diameter over Jacket: 0.400" (10.16 mm)

Messenger: Galvanized steel; 0.072" (1.8 mm)

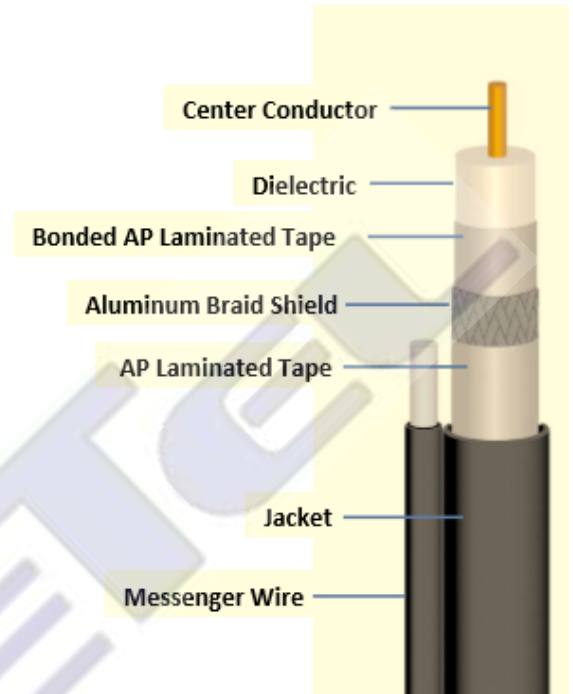

Frequency (MHz)	Maximum (dB/100ft)	Maximum (dB/100 m)
5	0.58	1.9
55	1.55	5.09
211	3.00	9.84
250	3.20	10.5
300	3.50	11.48
350	3.80	12.47
400	4.12	13.52
450	4.37	14.34
500	4.63	15.19
550	4.86	15.94
600	5.08	16.67
750	5.65	18.54
870	6.10	20.01
1000	6.54	21.46

NEC Rated: None

Electrical Properties:

Impedance: 75 +/- 3 Ohms

Velocity Propagation: 85% Nominal

Cable Length Per Reel: 1,000 ft (305 m)

Shipping Weight: 88lbs/1,000 ft

Packaging: 20"x6"x11" (51x15x28 cm)

