


signia combiner/splitter

Product information

The Signia combiner/splitter is a special filter made from the same concept of Signia distribution passives of taps and splitters, meaning a reliable performance and superb specifications that optimizes network design options and efficiency.

A lightweight design allows easy handling. Mounting spacers that are easily snapped on and off provide a choice for spacing underneath the unit, thereby allowing a more flexible installation. There is easy access to F-connectors, which are mounted on the same side. A unique construction of the female F-connector ensures secure connection to the inner conductor of the male connector, and furthermore, the alloy ensures minimal corrosion. This dramatically reduces the likelihood of signal dropout and the subsequent need for network troubleshooting.

The port number, frequency range and all connectors are clearly marked with rugged labels.

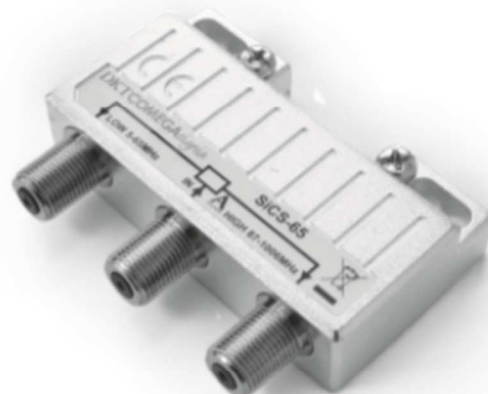

Combiner/Splitter

Type	SiCS-65	
Item no.	48930	
Port	Low	High
Pass band (MHz)	5 - 65	87 - 1006
Pass band loss (dB)	0.5	0.5
Stop band (MHz)	87 - 1006	5 - 65
Stop band loss (dB)	> 35	> 35
Operating temperature	-25 to +70 °C	

Connectors: Brass milled, nickel tin plated, F-Female (ANSI/SCTE 01 2006)
 Voltage blocking: > 2 kV
 Passive IM: > 125 dB, two carriers 50 and 55 MHz at 120 dB μ V
 Dimensions: 65 x 50 x 16 mm
 Weight: 86 g

CoreTel s.r.o.
 K Cintorínu 64
 010 04 Žilina
 Slovenská republika

IČO: 47 744 731
 IČ DPH: SK2024077726

Fio banka a.s. č.ú.:
 EUR: 2500577171/8330
 CZK: 2100577172/2010
 USD: 2400577174/8330

Tel. č.: +421 948 87 55 87
 Tel. č.: +421 948 86 55 86
 Email: coretel@coretel.eu
 Web: www.coretel.eu

Standardization of Signia Combiner/Splitter

The Signia combiner/splitter complies with a range of standards, below are some of the most relevant for

Description	Name	Conformity
Dry Heat	EN60068-2-2	✓
Change of temperature	EN60068-2-14	✓
Return loss	EN60728-4	Grade 1+
Screening effectiveness	EN50083-2	Exceeds Class A
Isolation (TAP-TAP)	EN60728-4	✓

+5-10 MHz: >18 dB

Description	Name	Conformity
Protection against intrusion	IEC 60529	IP67
Damp Heat	EN60068-2-30	✓
Salt Mist	EN60068-2-11	✓
Vibration	EN60068-2-6	✓

