

LREC9802BF-2SFP+

PCIe x8 Dual-port 10G SFP+ Ethernet Network Adapter (Intel 82599 Based)

Overview

world to everywher



L LREC9802BF-SFP+ is a PCI Express x8 Dual port 10G Ethernet server adapter developed by Shenzhen Lianrui Electronics Co., Ltd. based on Intel 82599 master control solution. The server adapter has 2 fully integrated 10Gt Ethernet Media Access Controller (MAC) & SFP+ ports. In addition to the functions of managing the Ethernet MAC and PHY layers, the server adapter card can also manage the traffic of the passed packets. The controller uses hardware acceleration to share tasks for the host, such as TCP/UDP/IP checksums, compute tasks, and TCP segmentation. The LREC9802BF-2SFP+ Server Adapter provides hardware-enhanced features such as intelligent queuing technology optimized for multi-core processors, with on-chip support for load balancing for higher levels of 10G Ethernet scalability. Providing Intel Virtualization Technology (VT-C), including network level, can significantly improve overall system performance in a virtual server environment. Intel VT-c technology includes several hardware optimization features that dramatically reduce I/O bottlenecks, increase throughput and reduce latency. Intel VT-c's Component Virtual Machine Device Queue (VMDq) significantly improves performance and reduces CPU utilization by offloading the data sorting load from the virtual machine monitor (VMM) to the network controller. Enhancements include offloading of inter-machine virtual machines, virtual machine direct connections (VMDc) to virtual machines.

The LREC9802BF-2SFP+ Server Adapter provides multiple hardware optimization features for I/O virtualization and supports a unified network to transform the data center with outstanding reliability, scalability and mobility. Allows local area network (LAN), storage area network (SAN), and IPC traffic to share the same Ethernet network, providing higher levels of performance support for high-bandwidth applications in evolving virtualized data centers. The server adapter card also supports iSCSI boot. This feature enables SAN and LAN traffic to share existing Ethernet infrastructure without the need for a dedicated iSCSI adapter. The advanced features included in the adapter card greatly increase the speed of iSCSI traffic & support iSCSI remote boot.

Sales:sales@Ir-link.com Support: support@Ir-link.com

Key Features

- Dual SFP+ Connectivity
- PCI Express (PCIe) v2.0 (5.0GT/s) x8 lanes
- Network Virtualization
- PXE boot
- IEEE 802.1q VLAN support with VLAN tag insertion
- Low profile & full-height bracket

Controller	Intel 82599
Baffle Height	Full height & half height
Fiber Type	10000Base-SR, 10000Base-LR, 10000Base-Cu
Power Consumption	8.0W
	Windows 7/8/8.1/10
	Windows Server 2003 R2/2008 R2/2012 R2/2016 R2/2019
	/2019 R2
System Support	Linux Stable Kernel version 2.6.x/ 3.x/4.x or later;
	Linux CentOS/RHEL 6.5 / 7.x or later
	Ubuntu 14.x/15.x/16.x or later
	VMware ESX/ESXi 4.x/5.x/6.x or later
Bus Type	PCI Express v2.0 (5.0GT/s) x8 , compatible with x16
Data Rate Supported per port	10000MbE
Connector	2*SFP+

Specifications

Technical Features

	IEEE802.3ae 10 Gigabit Ethernet over fiber
	IEEE 802.3x Full Duplex and flow control
	IEEE 802.1AS
Standards Compliant	IEEE 802.1Q VLAN
	IEEE 802.3AD
	IEEE 1588
	IEEE 802.3az - Energy Efficient Ethernet
PXE	Yes
iSCSI	Yes
FCoE	Yes
DPDK	Yes
WoL	No
VMDq	Yes
Jumbo Frames	Yes
RSS	Yes
PCI-SIG*SR-IOV	Yes

Environment Features

Operating Temperature	0 ℃ to 55 ℃ (-13 ℉ to 158 ℉)
Storage Temperature	-40 ℃ to 70 ℃ (-40 ℉ to 158 ℉)
Storage Humidity	Maximum: 90% non-condensing relative humidity at 35 ${}^\circ\!{}^\circ\!{}^\circ$

Physical Features

Size(mm)	167*120*21
Weight(g)	115

LED Indicators


LED Indicators Yellow Link + Green Blink		
	LED Indicators	Yellow Link + Green Blink

Order Information

M/N	Description
LREC9802BF-2SFP+	PCIe x8 Dual-port 10G SFP+ Ethernet Network Adapter 2*SFP+ (Intel 82599 Based)




Product Structure

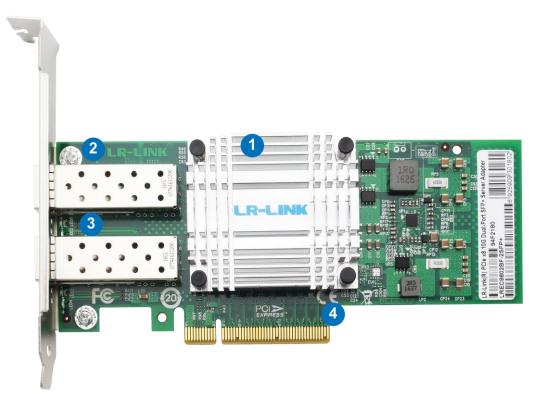

- 1. Heat Sink
- 2. LR-LINK LOGO
- 2. 2*10G SFP+ Connector
- 3 . PCIe x8 Bus

PS: Above details are only for reference, if there is any change, no prior notice.

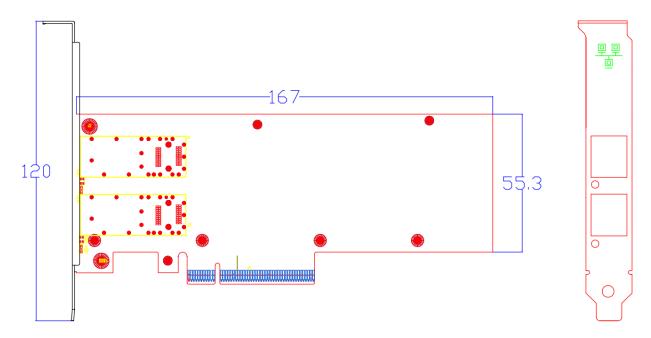

PS: Above details are only for reference, if there is any change, no prior notice.