
## 8686 FTTH Wall Outlet








- •The outlet allows mounting of 4 ea SC simplex couplings.
- •Normally only 2 ports would be used depending on cable entry and coiling direction
- •If only one SC port is used, the three attached blind covers will close the unsued SC ports.
- •A blind cover closes the keystone port for only fibre terminations

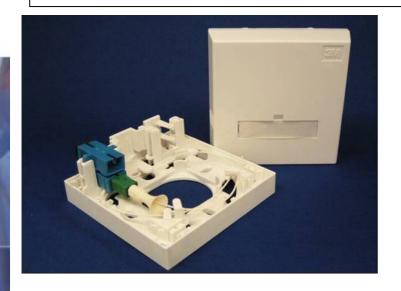


## Cable entry form rear and fixing




Fibre routing




Placing 1st pigtail and splice









## Placing of 2nd pigtail and splice

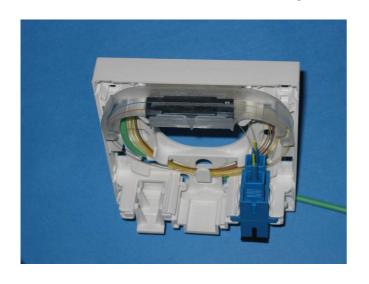

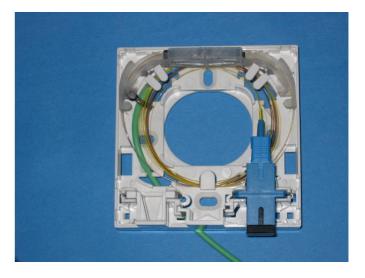

Direct termination with SC NPC ocnnector

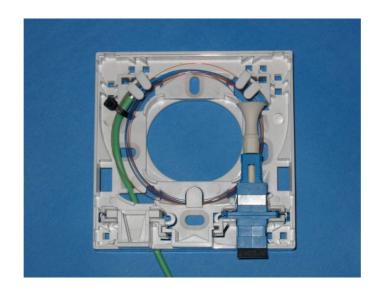



## Mounting on 60mm under wall beaker

