


## Xoptic Kotevná svorka koncová FISH-U-CLAMP od 2mm do 5mm



Weight: 0,033 kg.  
MBL: 0,5 kN.  
Material: PA 6

Clamp for FTTH drop cable: Aerial type; Outdoor type

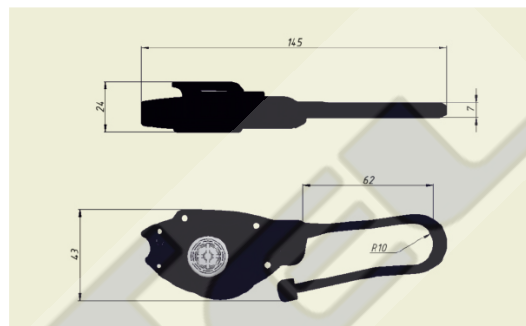

### APPLICATION CABLE

Fiber Optic Distribution Cable, Round-Type  $\varnothing$  2-4 mm.



Fiber Optic Drop Cable, Flat-Type: 2x3 mm.



Fiber Optic Drop Cable Flat, Figure-8 Type: 2x5 mm.



### APPLICATION METHODE

Fiber Optic Distribution Cable, Round-Type  $\varnothing$  2 mm.: Three turns.

Fiber Optic Distribution Cable, Round-Type  $\varnothing$  3 mm.: Two turns.

Fiber Optic Distribution Cable, Round-Type  $\varnothing$  4 mm.: One turn.

Fiber Optic Drop Cable, Flat-Type 2x3 mm.: One turn.

Fiber Optic Drop Cable, Flat-Type 2x5 mm.: One turn.

