

MiniXtend® Cable, LT, A-DQ(ZN)2Y

CORNING

Corning MiniXtend products are fiber optic stranded loose tube or central tube fully dielectric outdoor cable typically used in Long-Haul, Metro- or Access Networks when limited space is available.

With the dual layer tube design and low friction PE sheath MiniXtend cables are optimized for blowing and best used in mini or micro ducts.

The buffer tubes and fiber in each tube are color-coded for quick and easy identification. MiniXtend are available with Corning Single Mode Fiber SMF 28e+® & SMF 28e® ULTRA (ITU-G 652D) or bend improved ClearCurve® fibers (ITU-G 657).

Features and Benefits

Reduced outer cable diameter

High fibre density in microduct systems

Compact and light

CapEx-optimised installations & upgrades

Optimised cable stiffness

Long installation lengths

Fully-dielectric


No grounding required

Colour-coded tubes & fibres

Easy identification of tubes & fibres

SMF-28e+® according to ITU-T G.652.D

Transmission security, low attenuation and polarization mode dispersion

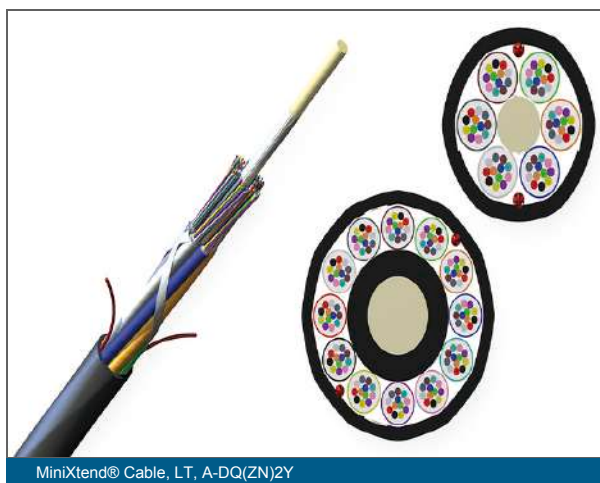

MiniXtend® Cable, LT, A-DQ(ZN)2Y

CORNING

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Specifications

General Specifications

Environment	Outdoor
Product type	Dielectric
Cable type	Stranded Loose Tube

Temperature Range

Temperature range, storage	-30 °C - 70 °C
Temperature range, installation	-5 °C - 40 °C
Temperature range, operation	-30 °C - 70 °C

Design Characteristics Cable

Fibre count	Fibres per tube	Number of tube positions	Number of active tubes	Buffer tube diameter
12 - 72	12	6	1 - 6	1.4 mm
96	12	8	8	1.4 mm
144	12	12	12	1.4 mm

Mechanical Characteristics Cable

Fibre count	Nominal outer diameter	Min. bend radius installation	Min. bend radius operation	Crush resistance	Weight	Max. tensile strength, short-term
12 - 72	5.3 mm	106 mm	79.5 mm	1000 N/10 cm	23 kg/km	350 N

MiniXtend® Cable, LT, A-DQ(ZN)2Y



Mechanical Characteristics Cable

Fibre count	Nominal outer diameter	Min. bend radius installation	Min. bend radius operation	Crush resistance	Weight	Max. tensile strength, short-term
96	6.3 mm	126 mm	94.5 mm	1000 N/10 cm	35 kg/km	1000 N
144	8 mm	160 mm	120 mm	1000 N/10 cm	53 kg/km	1000 N

Transmission Performance

Single-mode

Performance option code	22
Fibre category	OS2
Fibre name	E9/125 SMF28e+®
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fibre code	E
Maximum Attenuation	0.36 dB/km / 0.36 dB/km / 0.22 dB/km

MiniXtend® Cable, LT, A-DQ(ZN)2Y

CORNING

□ □ □ **E** **M** **4** - □ □ **1** **2 2** **A** **2 0**

1 **2** **3** **4** **5** **6** **7** **8** **9** **10**

1 Select fibre count.

012 048 096
024 060 144
036 072

2 Select fibre type.

E = Single-mode (OS2)
SMF-28e+®

3 Defines cable type.

M = MiniXtend Cable

4 Defines outer jacket.

4 = Single

5 Defines fibre placement.

T = 12 fibres/buffer tube
(standard)
8 = 8 fibres per tube
6 = 6 fibres per tube
4 = 4 fibres per tube

6 Defines length markings.

3 = Markings in meters
4 = Markings in feet

7 Defines tensile strength.

1 = Standard

8 Defines performance option code.

22 = Single-mode (OS2)
Max. attenuation 0.36/0.22/0.36 dB/km
1310/1383/1550 nm

9 Defines cable type.

A = MiniXtend Cable

10 Defines special requirements.

20 = Standard construction



Corning Optical Communications GmbH & Co. KG • Lelpziger Strasse 121 • 10117 Berlin, Germany
+00 800 2675 4641 • FAX: +49 30 5303 2335 • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2022 Corning Optical Communications. All rights reserved.