

ALTOS® Loose Tube Dielectric Armour Outdoor Cable

4x12 E9 SMF-28e+® ITU G652.D LT 2.3

CORNING

Corning glass-yarn armored loose tube cables are designed for outdoor use for campus, city and intercity backbones in duct installations.

The loose tube cable construction, by isolating the fibers from installations and environmental rigors, provides stable and highly reliable transmission parameters. The buffer tubes and fibers in each tube are colour coded for quick and easy identification.

The SZ-stranded construction further reduces installation and environmental influences on the transmission parameters and allows mid-span access.

These cables are designed for installation in conduits and ducts.

Features and Benefits

Waterblocking technology

Outside Plant (OSP) applications

All-dielectric cable construction

Requires no grounding or bonding

UV and microbe resistant

Can be installed in ducts

Dry cable core by means of water-swellable tape and elements

Allows efficient and craft-friendly cable preparation in outdoor or indoor/outdoor applications

Laminated glass yarns

For improved rodent resistance

Fibres/buffer tubes colour coding to Telcordia-Bellcore


Easy identification of the individual tubes and fibres

SZ-stranded, loose tube design

Isolates fibres from installation and environmental rigors and facilitates mid-span access



Part Number: 048ERG-T3122A20

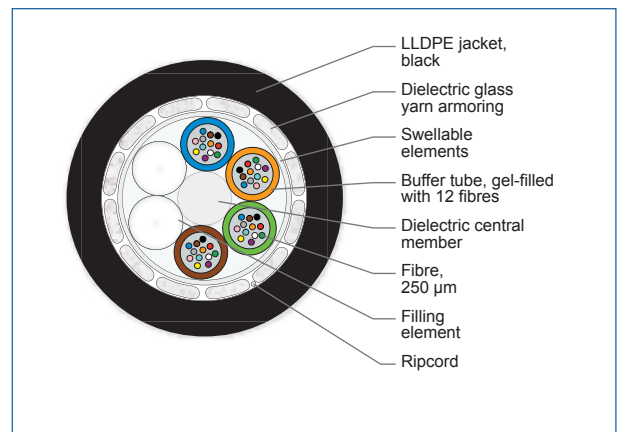

Cross Section of Order Number: 048ERG-T3122A20

Standards

Waterblocking

IEC 60794-1-2 F5

ALTOS® Loose Tube Dielectric Armour Outdoor Cable

4x12 E9 SMF-28e+® ITU G652.D LT 2.3

CORNING

Specifications

General Specifications	
Environment	Outdoor
Application	Duct
Cable Type	Loose Tube
Product Type	Dielectric armour
Fibre Category	SM (OS2)
Coding according to EN 60794-1-1 (DIN VDE 0888-100-1)	A-DQ(ZN)B2Y
Previous Part Number	FWLT01-S0048-U003
Previous coding following DIN VDE 0888-3	A-DQ(BN)2Y

Temperature Range	
Installation and Assembly	-5 °C to 50 °C
Operation	-30 °C to 70 °C
Storage	-40 °C to 70 °C

Cable Design	
Central Element	Dielectric
Central Element Diameter	2.5 mm
Fibre Count	48
Fibre colouring	Blue, orange, green, brown, grey, white, red, black, yellow, violet, pink, turquoise
Fibres per Tube	12
Number of Tube Positions	6
Number of Active Tubes	4
Buffer tube colour coding	Blue, orange, green, brown
Buffer tube diameter	2.25 mm
Number of filling elements	2
Filling element colour	Natural
Tape	Water-swellaible
Number of Ripcords	1
Tensile Strength Elements and/or Armouring - Layer 1	Laminated glass yarn armour
Outer Jacket Material	Linear Low Density Polyethylene (LLDPE)
Outer Jacket Colour	black

ALTOS® Loose Tube Dielectric Armour Outdoor Cable

4x12 E9 SMF-28e+® ITU G652.D LT 2.3

CORNING

Cable Design

Outer Jacket Nominal Thickness	1.5 mm
Cable Marking	Meter Handset Sine CORNING Year ALTOS® A-DQ(ZN)B2Y 48 E9 LT 2.3

Mechanical Characteristics Cable

Nominal Outer Diameter	10.9 mm
Weight	91 kg/km
Min. Bend Radius Installation	215 mm
Min. Bend Radius Operation	160 mm
Max. Tensile Strength for Installation	4000 N
Crush Resistance (reversible)	2000 N/10 cm

Chemical characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

Fibre Specifications

Optical Characteristics (cabled)

Fibre Name	E9/125 SMF28e+
Fibre Core Diameter	8.2 µm
Fibre Category	OS2
Fibre Code	E
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.36 dB/km / 0.36 dB/km / 0.22 dB/km
Serial 1 Gigabit Ethernet	5000 m / - / -
Serial 10 Gigabit Ethernet	10000 m / - / 40000 m
Cable cutoff wavelength	1260 nm

- Notes:
- 1) Meets 0.75 ns optical skew when used in all Corning Plug and Play™/Pretium EDGE® systems solutions.
 - 2) Improved attenuation and bandwidth options available
 - 3) Bend-insensitive single-mode fibres available on request
 - 4) Contact a Corning Customer Care Representative for additional information

ALTOS® Loose Tube Dielectric Armour Outdoor Cable

4x12 E9 SMF-28e+® ITU G652.D LT 2.3



Ordering Information

Part Number	048ERG-T3122A20
Product Description	ALTOS® Loose Tube Dielectric Armour Outdoor Cable 4x12 E9 SMF-28e+® ITU G652.D LT 2.3
EAN Code	4042673399803

Shipping Information

Maximum Delivery Length	6,000 m
-------------------------	---------



Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY
00 800 2676 4641 · FAX: +49 30 5303 2335 · www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2014 Corning Optical Communications. All rights reserved.