

# ADSS Aramid Single Jacket Cable up to 200m span LT 2.3 8x12 fibres, SMF-28e+® fibre

CORNING

**Part Number:**  
**096EG4-T3M22A20**

Corning single jacket ADSS cables for medium span applications are all-dielectric, self-supporting (ADSS) cables designed for easy and economical one-step installation in campus backbones with self-supporting installations where metallic messengers cannot be used. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber. The economical single-jacket design can span distances of 100m in NESC heavy conditions, 150m in NESC medium conditions and 200m in NESC light conditions.

This cable incorporates innovative waterblocking materials, eliminating the need for traditional flooding compound and providing efficient and craft-friendly cable preparation. While the concentric, self-supporting cable design allows easy, one-step installation using standard hardware and installation methods, the SZ-stranded, loose tube design isolates optical fibres from installation and environmental rigors and facilitates mid-span access. These ADSS optical cables are available with HDPE jacket for installation in telecom applications.

## Features and Benefits

All dielectric self-supporting aerial cable

Non-metallic strength members over the cable core


Dry cable core by swellable elements

Single-layer stranded construction up to 144 fibres

Single-mode fibres fully compliant to standard ITU G.652 D (reduced OH- peak) showing low attenuation throughout the 1285 nm to 1625 nm wavelength range

Telcordia standard for fibre and loose tube coloring

Cable design according to CORNING standard

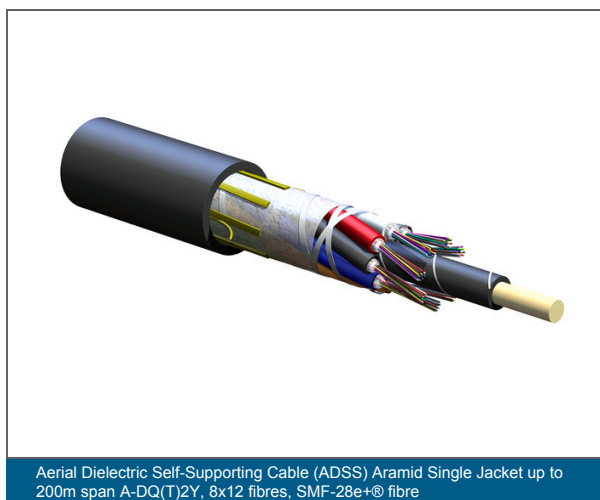

# ADSS Aramid Single Jacket Cable up to 200m span LT 2.3 8x12 fibres, SMF-28e+® fibre

CORNING

## Specifications

### General Specifications

Environment	Outdoor
Cable type	Loose tube
Fibre category	Single-mode (OS2)
Fibre count	96

### Standards

Fibre Standards	TIA/EIA-492CAAB, IEC 60793-2-50 Type B1.3, ITU-T G.652.D, ISO/IEC 11801 Ed.2.2
-----------------	--

### Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Fibre Standards	TIA/EIA-492CAAB, IEC 60793-2-50 Type B1.3, ITU-T G.652.D, ISO/IEC 11801 Ed.2.2

### Environmental Conditions

Halogen-free	Yes
Temperature range, installation	-5 °C to 50 °C
Temperature range, operation	-40 °C to 70 °C
Temperature range, storage	-40 °C to 70 °C

### Cable Design

Cable marking	Metre Handset Sine CORNING Fiber Optic Cable YearADSS CABLE A-DQ(T)2Y 8X12 E9 LT2.3 UP TO 200M
Central element	Dielectric
Fibre count	96
Outer jacket colour	Black

# ADSS Aramid Single Jacket Cable up to 200m span LT 2.3 8x12 fibres, SMF-28e+® fibre

CORNING

## Cable Design

Outer jacket material	High Density Polyethylene (HDPE)
Buffer tube colour	Blue, orange, green, brown, grey, white, red, black
Number of active tubes	8
Number of tube positions	8
Cable marking method	Hotfoil printing
Cable marking colour	White
Fibre colouring	Blue, orange, green, brown, grey, white, red, black, yellow, violet, pink, turquoise
Fibres per tube	12
Color Code Standards	Telcordia

## Mechanical Specifications

Crush resistance	2000 N/10 cm
Impact testing acc. IEC 69794-1-2 E4, 5 J, $\Delta L \geq 0.5$ m	3 impact(s)
Max. tensile strength, long-term	4660 N
Max. tensile strength, short-term	7600 N
Min. bend radius installation	183 mm
Min. bend radius operation	244 mm
Nominal outer diameter	12.2 mm

## Optical Characteristics

Cable cutoff wavelength	1260 nm
Fibre code	E
Fibre name	SMF-28e+®
Fibre Type	Single-mode
Fibre core diameter	8.2 $\mu$ m
Cladding diameter	125 $\mu$ m
Dispersion @ 1550 nm	18 nm

# ADSS Aramid Single Jacket Cable up to 200m span LT 2.3 8x12 fibres, SMF-28e+® fibre



Optical Characteristics	
Dispersion @ 1625 nm	22 nm
Maximum Attenuation	0.36 dB/km / 0.36 dB/km / 0.22 dB/km
Mode-Field Diameter at 1310 nm	9.2 µm
Wavelengths	1310 nm / 1383 nm / 1550 nm
PMD Link Design Value	0.06 ps/(nm*km)
PMD (Polarization Mode Dispersion) maximum individual fibre	0.1 ps/(nm*km)
Coating diameter	242 µm
Fibre category	OS2

Dimensions	
Cable Weight	114 kg/km
Max. cable length per reel/drum	6000 m

Installation Characteristics								
	Initial Installation		NESC Light		NESC Medium		NESC Heavy	
Span	SAG	Tension	SAG	Tension	SAG	Tension	SAG	Tension
Fibre count 96								
100 m	1.5 %	924 N	3.5 %	2,585 N	3.8 %	3,161 N	4.5 %	4,618 N
150 m	1.5 %	1,385 N	3.8 %	3,568 N	4.2 %	4,326 N		
200 m	1.5 %	1,847 N	4 %	4,477 N				



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany  
 +00 800 2675 4641 • FAX: +49 30 5303 2335 • [www.corning.com/opcomm/emea](http://www.corning.com/opcomm/emea)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/emea/trademarks](http://www.corning.com/opcomm/emea/trademarks). Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2024 Corning Optical Communications. All rights reserved.