



TABLE OF CONTENTS

About PPC	2
ISO 9001:2000.....	3
Working Environment Certificate.....	4
Terms and conditions	5

HARDLINE CONNECTORS

Features	1
PPC Denmark hardline connector part identification	2
Typical example of data sheet	3
Typical example of installation instruction	4
Hardline connectors.....	5-10

ADAPTERS

Adapters.....	1-11
Entry adapters	12-13
Port caps	14
Terminators	15-16

JUMPERS

Jumper cables.....	1
All integrated power jumpers	2

EX CONNECTORS

Ex compression connectors.....	1-2
Drop jumpers/fly leads.....	3

TOOLS

Ripley tools.....	1-3
PPC prep tools.....	4
Instructions for PPC prep tools	5
Instructions for braid and foil prep tool	6

CABLE DATA

Cable data	1-22
------------------	------

VARIOUS

Various	
---------------	--

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark
Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse • New York 13057-0278
USA
Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



ABOUT PPC

PPC, a division of John Mezzalingua Associates, Inc., is a privately held and family operated company that has been manufacturing precision products since 1940. The company, originally named "Production Products Company", focused on the design and manufacture of taps and amplifiers.

As the cable industry emerged in the 1950s, PPC designed and engineered coaxial connectors for the very first broadband networks and its products were sold under the brand names of Scientific Atlanta, Jerrold, and Magnavox.

For over 60 years, the company has dedicated its efforts to developing innovative products for the cable and telephone industries, and PPC continues this tradition through the manufacture of a full line of Hardline and Drop Connectors, a full range of Traps and Filters, and Fiber Optic Connectors and Jumpers.

PPC's worldwide headquarter and primary manufacturing facility is located in an ultra-modern 100.000 sq. ft. building in Syracuse, New York with sales and distribution centers located throughout five continents of the world.

PPC Denmark is located in DK-Praesto, one hours drive south of Copenhagen. We are a manufacturing research and design facility solely geared to accommodate the growing technical requirements of European CATV and 50 ohm Cellular connectors.

With the wide range of connectors and adapters PPC Denmark is ready to help you in solving all your connecting tasks. We see ourselves as our customer's partner and we are specialists in designing the right connector to fulfill exactly your task. If you do not find the products, you are looking for in our catalogue, please do not hesitate to contact us with your specific requirement.

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse - New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315-431-7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



ISO 9001:2000

UNDERWRITERS LABORATORIES INC. CERTIFICATE OF REGISTRATION

ISO 9001

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Underwriters Laboratories Inc.® (UL) issues this certificate to the Firm named above, after assessing the Firm's quality system and finding it in compliance with

ISO 9001:2000

EN ISO 9001:2000; BS EN ISO 9001:2000; ANSI/ASQ Q9001:2000

for the following scope of registration

3678 (US) : Electronic Connectors

The design and manufacture of connectors and adapters.

Further clarifications regarding the scope of this certificate and the applicability of ISO 9001:2000 requirements may be obtained by consulting the organization.

This quality system registration is included in UL's Directory of Registered Firms and applies to the provision of goods and/or services as specified in the scope of registration from the address(es) shown above. By issuance of this certificate the firm represents that it will maintain its registration in accordance with the applicable requirements. This certificate is not transferable and remains the property of Underwriters Laboratories Inc.®.


File Number: A9723

Volume: 1

Issue Date: January 9, 2001

Revision Date: February 27, 2003

Renewal Date: February 27, 2006



S. Joe Bhatia
Executive Vice President and
Chief Operating Officer - International



PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse • New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315-431-7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



Working Environment Certificate

DANSK STANDARD

Arbejds miljøcertifikat

Working Environment Certificate

Inspektion

Inspection

Certifikat nr. 2.1

Certificate no. 2.1

Det attesteres hermed, at der er udført inspektion af arbejdsmiljøet hos
This is to certify, that the Working Environment has been inspected at

**PPC Denmark
Filial af John Mezzalingua Associates Inc. USA
Værkstedsvvej 14
4720 Præstø**

i overensstemmelse med kravene i
fulfils the requirements in

**Bekendtgørelse nr. 924 af 21. oktober 2001
om arbejdsmiljøcertifikat opnået gennem inspektion**

Certifikatets gyldighedsområde er:
The scope of the certificate is:

Udvikling og fremstilling af konnektorer og adaptorer
The design and manufacture of connectors and adaptors

Inspektionen er gennemført den 6. og 7. januar 2003
The inspection has been carried out on January 6. and 7. 2003

Dette certifikat er udstedt i overensstemmelse med DS' bestemmelser vedrørende inspektion.
Certifikatets danske tekst betragtes som den juridisk gældende i tilfælde af tvivl om oversættelsens korrekthed.

*The certificate is granted in conformity with the DS rules for inspection.
The Danish text at the certificate is considered to be legally binding in case of doubt with regard to the correctness of the translation.*

Udstedt:
Date of issue:

2003-01-23

Niels-Christian Dalstrup
Niels-Christian Dalstrup
Repræsentant for Ledelsen
Management representative

 **DANAK**
Reg.nr. 9043


DS
CERTIFICERING
DANISH STANDARDS ASSOCIATION
Kollegievej 6, 2920 Charlottenlund

The Danish Standards Association is a member of IQNet, The International Certification Network.

PPC Denmark

Værkstedsvvej 14
DK-4720 Præstø
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse - New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431-7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



TERMS AND CONDITIONS

PROVISIONS

1. No modification of the terms hereof shall be effective unless made in writing signed by both parties. Acceptance of this Agreement must be made on its exact terms, and if additional or different terms are proposed by Buyer, Buyer's response shall constitute a counter offer, at John Mezzalunga Associates, Inc. d/b/a/ PPC approval.
2. Payment terms are net 30 days from date PPC invoice.
3. Delivery terms are F.O.B at PPC plant in Præstø, Denmark. Risk or loss shall pass to Buyer upon delivery to carrier at PPC plant. Dates of delivery are determined from the date of PPC acceptance of any order or orders by Buyer and are estimates of approximate dates of delivery. PPC shall not be liable for failure or delay in shipping products hereunder if such failure or delay is due to and act of God, fire, flood, sabotage, war, labor difficulties accidents, riot. Insurrection, act of any governmental authority, priorities granted at the request or for the benefit directly or indirectly of any government or agency thereof, shortage of raw materials, inability to meet current sales requirements, non-performance by vendors or subcontractors, or any cause reasonably beyond the control of PPC.
4. No agent, employee or representative of PPC has any authority to bind PPC to any affirmation, representation or warranty concerning the product sold under this Agreement and unless an affirmation, representation or warranty made by employee or representative is specifically included within this written Agreement, it is not part of the basis of the bargain and shall not be against PPC.
5. If the products to be prepared or manufactured according to Buyer's specifications, Buyer shall indemnify PPC against any liability for product performance and patent or trademark infringement on account of such preparation or manufacture.
6. Any tax imposed by Federal, State or other Governmental authority on the sale of the products referred to in this Agreement shall be paid by Buyer in Addition to the purchase price.
7. PPC warrants each product delivered pursuant to this agreement shall be free of defects in design, material and workmanship under the normal use and service for which the product are intended.
 - (a) Buyer gives PPC written notice of product defects within one (1) year after delivery for "active" products and within ninety (90) days after delivery for "passive" products.
 - (b) PPC examination shall disclose, that the products where in fact defective and that the installation of the products had been performed in a competent manner.

Appropriate manufacturer's warranties will apply to all products supplied by PPC and manufactured by others. This warranty is in lieu of all other warranties expressed or implied, and does not apply to any products of PPC which may have been subjected to unauthorized repair or alteration or which have been subjected to misuse or abuse, and nether assumes or authorizes any person to assume for it any other liability in connection with its products.

PPC SHALL NOT BE LIABLE FOR CONSEQUENTIAL FOR OTHER TYPE DAMAGES RESULTING FROM THE USE OF ANY PPC PRODUCTS OTHER THAN THE LIABILITY STATED ABOVE. THIS WARRENTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR USE.

8. Terms of payment shall be subject to approval of PPC Credit Department and in case of doubt arising at any time as to Buyer's financial responsibility, production may be stopped and shipments suspended until satisfactory assurances are received. PPC shall be under no obligation to make any shipment when Buyer is in default hereunder or under any other sales agreement between PPC and Buyer.
9. Security for payment. To secure the payment of any unpaid balances Buyer does hereby, setover, grant, and convey to PPC a security interest in the products and each of the parts thereof delivered pursuant to this Agreement together with all replacement parts, additions, repairs and accessories incorporated thereto and/or hereafter affixed thereto; to have and to hold the said security interests in said products and each of the parts thereof forever provided however, if Buyer shall make or cause to be made according to the terms hereof, payment in full in cash for the products and shall keep and perform the covenants and agreements herein contained, then this transfer shall be void; otherwise to remain in full force and effect.
10. PPC reserves the right to assess cancellation charge on the unshipped value of a purchase order. The cancellation charge will be a minimum of 20% up to the full value of the order.
11. PPC will assess a minimum of 25% of the value of all requests to return goods to our stock. PPC will only accept the return of unopened/sealed cartons. All returned product must be authorized in advance by a PPC representative accompanied by return signature accepting restocking charge. Credit for returned product will be at the discretion of PPC, based on the evaluation of age of product, quality and quantity and reusability.
12. Attorney in Fact. Buyer hereby irrevocably appoints PPC or PPC assignee its attorney in fact to file any financing statement or other documents and agreements to do what PPC or its assignee may deem necessary to continue to perfect the security interests crated by this Agreement and to protect the products and each of the parts thereof.
13. A handling charge will be added to orders amounting to less than EUR 300.00.
14. Any dispute arising out of the agreement and its terms and conditions shall be governed by Danish law, the Copenhagen Maritime and Commercial Court being the exclusive venue.

PPC Denmark

Vaerkstedsvej 14
DK-4720 Præstøe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

HARDLINE CONNECTORS



HARDLINE CONNECTORS



FEATURES

- Return loss better than – 30dB to 1GHz.
- At extreme temperatures (-40 to + 85 degree C) high RF integrity maintained, with shielding effectiveness better than –110dB.
- All PPC Denmark products are plated with the unique NITIN plating for the highest protection against corrosion and attack from environmental pollution.
- Connector Holding Power maintained over the full temperature range, without damage to cable.
- Connectors have patented Anti-Rotational feature, which prevents cable from twisting as the back nut is tightened.
- Connectors are re-usable.
- Positive stop feature eliminates need for torque wrenches or special tools.
- Installation always consistent – Connector cannot be over tightened to damage cable.
- Only one wrench size needed for each connector.
- Physical contour easy to handle, allowing for simplified installation of heat shrink tubing, where used.
- Standard PPC Line accommodates cable and equipments of all past and current American and European CATV manufacturers.
- Each connector individually stamped to identify Connector size and type.
- 47 mm/1.85" pins are standard on all PPC 5/8male and PG11male Connectors and Adaptors.
Other lengths available on request.
- PPC has an Inner- and Outer Conductor Length Cut Mark placed on the back nut of all Connectors to identify correct Cut Length.
- All F female Connectors and Adaptors with high quality 4 finger Inner Conductor allowing 4 Amp current.

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark
Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA
Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

HARDLINE CONNECTORS



PPC DENMARK HARDLINE CONNECTOR PART IDENTIFICATION


Physical size of the Connector:

A	Hex size 14 =	Cable size 6,0 - 8,0 mm.
B	Hex size 18 =	Cable size 9,0 - 11,5 mm.
D	Hex size 20 =	Cable size 11,5 - 13,5 mm.
E	Hex size 22 =	Cable size 13,5 - 16,0 mm.
G	Hex size 25 =	Cable size 16,0 - 18,5 mm.
H	Hex size 27 =	Cable size 18,5 - 22,0 mm.
M	Hex size 32 =	Cable size 23,0 - 25,5 mm.
R	Hex size 38 =	Cable size 27,0 - 31,0 mm.
S	Hex size 42 =	Cable size 32,0 - 35,0 mm.

PPC Part Number Identification: (example)

Letter code for hex size of Connector

Cable size in mm



B004-5/8m

2nd- 4th digits. Connector code

e.g. 004 referring to our cross reference

list of the cable manufacture. (see cable pages)

Port e.g. 5/8m

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA


Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

PPC description	Detailed description	PPC Description	Detailed description
5/8m	5/8 male	PG13,5m	PG13,5 male
5/8ms	5/8 male, swivel	PG13,5ms	PG13,5 male, swivel
5/8f	5/8 female	PG13,5ft	PG13,5 feed true
5/8fs	5/8 female, swivel	IECm	IEC14 male
5/8-Ff	5/8 tread w. F female	IECf	IEC14 female
5/8ft	5/8 feed true	3,5/12m	3,5/12 male
5/8fts	5/8 feed thru w. swivel	3,5/12f	3,5/12 female
PG11m	PG11 male	Fm	F male
PG11ms	PG11 male, swivel	Ff	F female
PG11f	PG11 female	M181x1	18mm metric
PG11fs	PG11 female, swivel	Nm	N male
PG11/Ff	PG11 thread w/F female	Nf	N female
PG11ft	PG11 feed thru	SPL	Splice
PG11fts	PG11 feed thru w. swivel	SPR	Splice reducer

HARDLINE CONNECTORS



TYPICAL EXAMPLE OF DATA SHEET

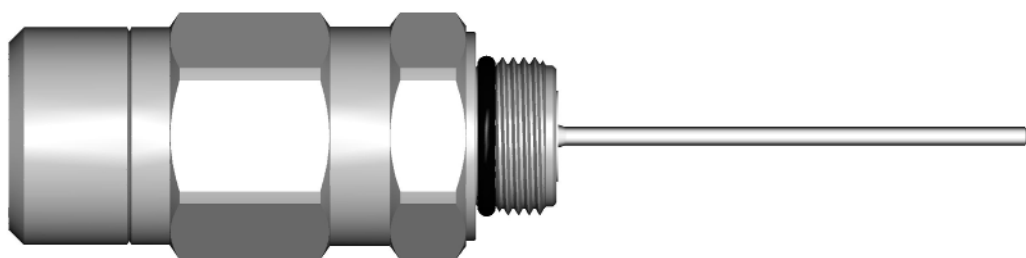

No.	30220150
Connector Type:	E019 - 5/8m 47mm

Band Width:	5 MHz - 2.2GHz
Impedance:	75 Ohm
Amp. Rating:	15 A
Shielding:	>110dB @ 900 MHz

Temperature	
Installing:	-5 to +50 °C
Operating:	-40 to +85 °C
Sealing Test:	DS / IEC 529: IP X7

Return Loss: @ MHz, Better Than	
500:	-36 dB
860:	-33 dB
1000:	-32 dB
1750:	-32 dB

Insertion Loss: @ MHz, Better Than	
500:	-0,05 dB
860:	-0,06 dB
1000:	-0,07 dB
1750:	-0,08 dB

Pull Strength:	
Total:	142 kg
Inner Conductor:	20 kg
Jacket:	142 kg

Dielectric Strength:	3 kV
Insulation Resistance:	(@500V): >29.99Gohm
Inner Conductor:	Resistance max. @ 1A DC: 0.5 mOhm

Material and Plating		
Body:	Brass	NiSn (NiTin)
Inner Cond.	Brass	NiSn (NiTin)
O'rings	EPDM	
Insulators	Polycarbonat / Polyethylene	

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com


HARDLINE CONNECTORS



TYPICAL EXAMPLE OF INSTALLATION INSTRUCTION

Connector: 30220150 E019 – 5/8m

Cable: COAX-4

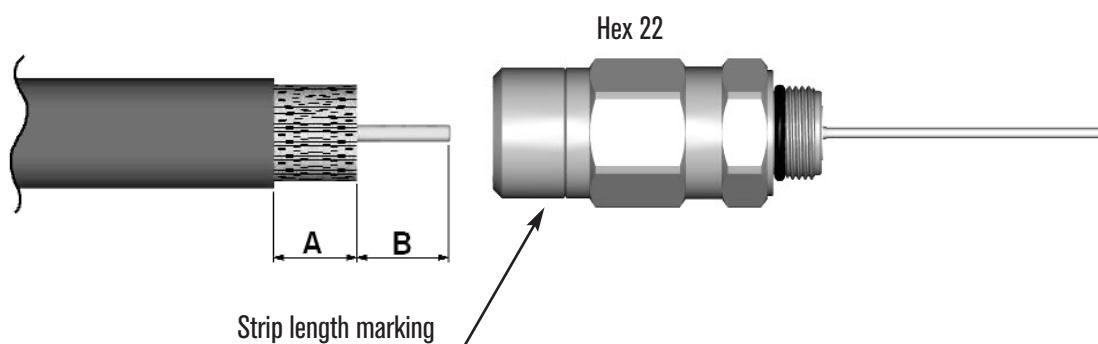

From the end of the cable measure back 12mm for Hex 22. At this point, cut cleanly and directly through to the center conductor and remove cable to expose center conductor, measurement "B" 12mm.

From here, the point where the center conductor exits the cable, measure back another 12mm, measurement "A". Carefully cut directly and cleanly through the sheath (jacket) until the copper braid is reached and pull off the sheath, exposing the braid and tape (foil).

For assistance, on the back lock nut shell of the connector, a groove has been added which represent measurements "A" and "B". Use this for measuring against the cable for correct preparation.

Measure and trim the pin (stinger) of the Connector Body according to the equipment manufacturer specification. Then insert the pin into the equipment and thread the Connector Body "C" into the equipment until hand tight, then fully wrench tighten, using 20-22 Nm / 15-17 ft. Pound. (1/4 turn).

Slide the back nut of the connector over the cable until it bottoms out / positive stop. - While holding the cable and the back nut, insert/push the center conductor into the connector body.

Hand tighten the back nut fully onto the connector body, while holding the cable and the back nut. Wrench tighten the back nut until the lead edge of the back nut bottoms against the shoulder of the connector body - metal to metal / positive stop "B".

THIS IS MOST IMPORTANT TO ENSURE CORRECT COMPRESSION IS ACHIEVED.

Recommended stripping tool: 90700500 - E019 Prep. Tool

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA


Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

HARDLINE CONNECTORS

HARDLINE CONNECTORS



5/8m

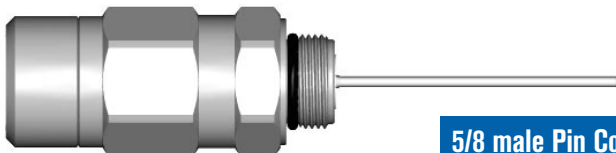


5/8 male Pin Connector

5/8 x 24 UNEF thread according to SCTE-IPS-SP-403

Pin diameter $\varnothing$ 1,8mm/0,071"

Standard Pin length 47mm. Other Pin lengths on request

PG11m

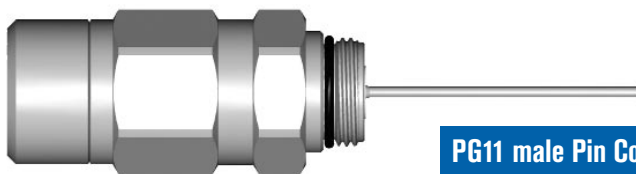


PG11 male Pin Connector

PG11 thread (1,41)

Pin diameter $\varnothing$ 1,8mm/0,071"

Standard Pin length 47mm. Other Pin lengths on request

5/8ms

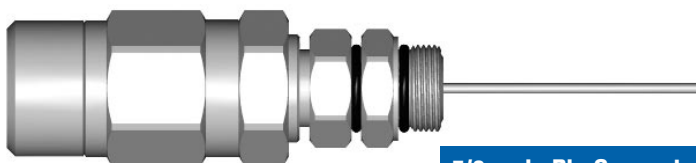


5/8 male Pin Connector with Swivel Nut

5/8 x 24 UNEF thread according to SCTE-IPS-SP-403

Pin diameter $\varnothing$ 1,8mm/0,071"

Standard Pin length 47mm. Other Pin length on request

PG11ms

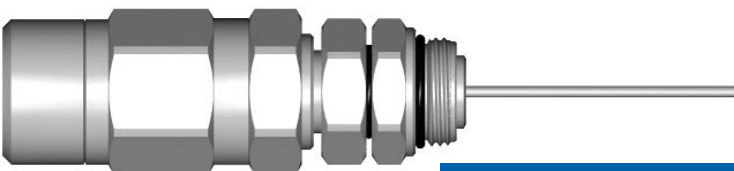

PG11 male Pin Connector with Swivel Nut

PG11 thread (1,41)

Pin diameter $\varnothing$ 1,8mm/0,071"

Standard Pin length 47mm. Other pin lengths on request

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22

Fax: +45 55 99 27 22

E-mail: ppc@ppc.dk

Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200

Fax: +1 315 431 7201

E-mail: ppc@ppc-online.com


Web: www.ppc-online.com

HARDLINE CONNECTORS



HARDLINE CONNECTORS


5/8ft

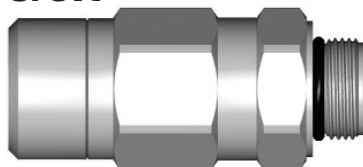

5/8 Feed thru Connector

5/8 x 24 UNEF thread according to SCTE-IPS-SP-403


PG11ft

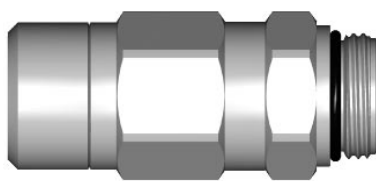

PG11 Feed thru connector

PG11 thread (1,41)


5/8fts

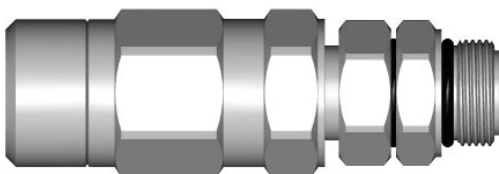

5/8 Feed thru with Swivel Nut

5/8 x 24 UNEF tread according to SCTE-IPS-SP-403

PG11fts

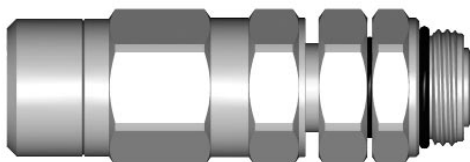

PG11 Feed thru with Swivel Nut

PG11 Thread (1,41)

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22

Fax: +45 55 99 27 22

E-mail: ppc@ppc.dk

Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200

Fax: +1 315 431 7201

E-mail: ppc@ppc-online.com


Web: www.ppc-online.com

HARDLINE CONNECTORS




HARDLINE CONNECTORS

3,5/12m

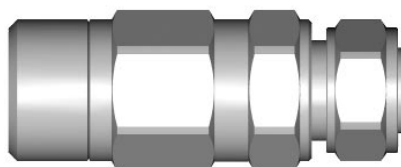


3,5/12 male Connector
Nut = HEX 22mm
According to IEC 169-14

3,5/12f

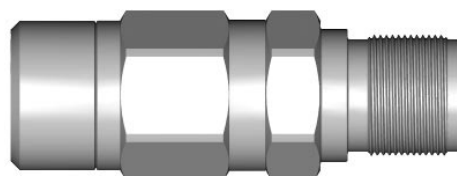


3,5/12 female Connector
According to IEC 169-14

3,5/12f-C

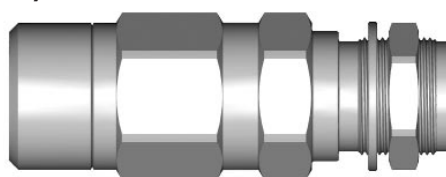

3,5/12 female Connector for Chassis mounting
According to IEC 169-14
Nut = HEX 22mm, Washer ø 25mm

IECm

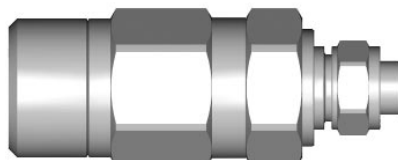

IEC male Connector
Nut = HEX 15mm
According to IEC 169-2

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA


Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

HARDLINE CONNECTORS




HARDLINE CONNECTORS

PG11/IECf-C

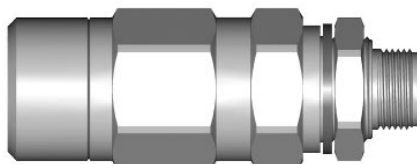


PG11 thread for Chassis mounting with IEC female
IEC standard 169-2
Nut = HEX 22mm, Copper washer $\varnothing$ 22mm

PG11/IECf-C-long

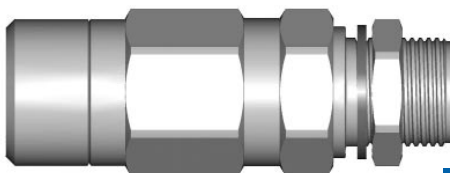


PG11 thread for Chassis mounting with IEC female
push on
IEC standard 169-2
Nut = HEX 22mm, Copper washer $\varnothing$ 22mm

Fm

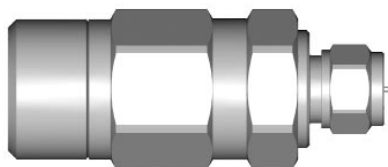

F male Connector
3/8 x 32 UNEF thread according to SCTE-IPS-SP-401
and IEC standard 169-24
Pin diameter $\varnothing$ 0,9mm/0,0355"

Ff

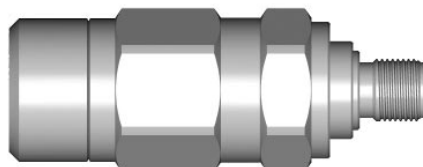

F female Connector
3/8 x 32 UNEF thread according to SCTE-IPS-SP-401
and IEC standard 169-24
Accepts 0,6-1,2mm Pin

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark
Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC


6176 East Molloy Road
East Syracuse · New York 13057-0278
USA
Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

HARDLINE CONNECTORS




HARDLINE CONNECTORS

Ff-C

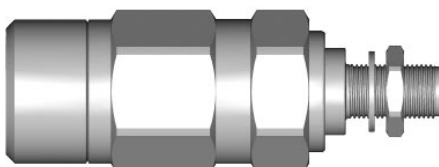

F female Connector for Chassis mounting
3/8 x 32 UNEF thread according to SCTE-IPS-SP-401
and IEC standard 169-24
Accepts 0,6-1,2mm Pin
Nut = HEX 14mm, washer ø 14mm

N male

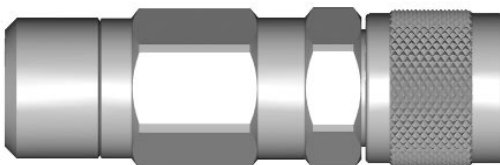


N male Connector
According to IEC standard 169-16

5/8-Ff



5/8 thread - F female Connector
5/8 x 24 UNEF thread
F female port (3/8 x 32 UNEF) according to IEC 169-24
Accepts 0,6-1,2mm Pin

SPL

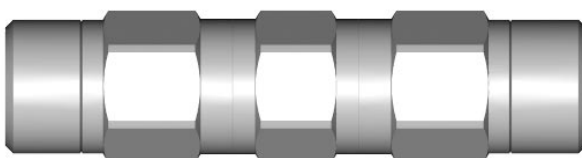

Splice Connector
Connecting two equal cable-ends

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark
Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC


6176 East Molloy Road
East Syracuse · New York 13057-0278
USA
Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

HARDLINE CONNECTORS



HARDLINE CONNECTORS

SPR

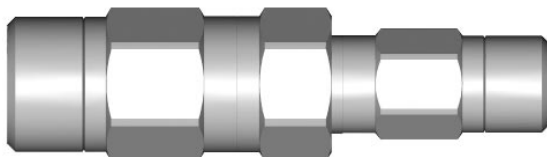

Splice reduce Connector
Connecting two different cable ends

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com


ADAPTERS



ADAPTERS




ADAPTERS

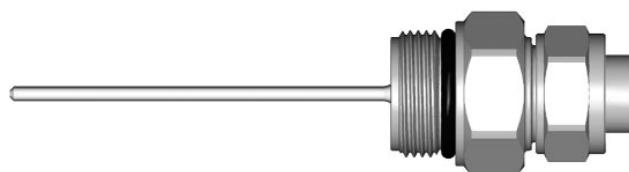

Part no.	Description
5/8m-IECm 47mm	5/8 male to IEC male HEX 18mm 5/8 x 24 UNEF thread according to SCTE-IPS-SP-403 IEC male port (M14 x 1) according to IEC 169-2 Pin diameter $\varnothing$ 1,8mm/0,071" Standard Pin length 47mm. Other Pin lengths on request



Part no.	Description
5/8m-IECf 47mm	5/8 male to IEC female HEX 18mm 5/8 x 24 UNEF thread according to SCTE-IPS-SP-403 IEC female port (M14 x 1) according to IEC 169-2 Pin diameter $\varnothing$ 1,8mm/0,071" Standard Pin length 47mm. Other Pin lengths on request

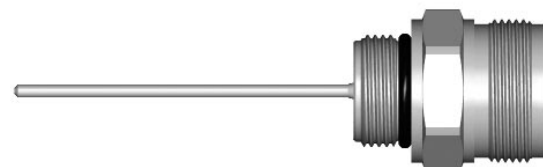

Part no.	Description
5/8m-3,5/12f 47mm	5/8 male to 3,5/12 female HEX 20mm 5/8 x 24 UNEF thread according to SCTE-IPS-SP-403 3,5/12 female port (M20 x 1) according to IEC 169-14 Pin diameter $\varnothing$ 1,8mm/0,071" Standard Pin length 47mm. Other Pin lengths on request

PPC Denmark

Vaerkstedsvej 14
 DK-4720 Praestoe
 Denmark

Telephone: +45 55 99 17 22
 Fax: +45 55 99 27 22
 E-mail: ppc@ppc.dk
 Web: www.ppc.dk

PPC


6176 East Molloy Road
 East Syracuse · New York 13057-0278
 USA

Telephone: +1 315 431 7200
 Fax: +1 315 431 7201
 E-mail: ppc@ppc-online.com
 Web: www.ppc-online.com

ADAPTERS




ADAPTERS

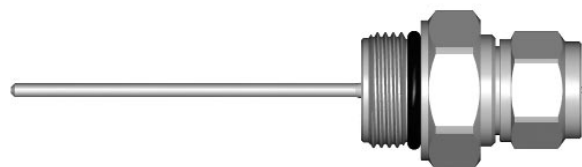

Part no.	Description
5/8m-Fm 47mm	5/8 male to F male HEX 19mm 5/8 x 24 UNEF thread according to SCTE-IPS-SP-403 F male port (3/8 x 32 UNEF) according to IEC 169-24 Pin diameter $\varnothing$ 1,8mm/0,071" Standard Pin length 47mm. Other Pin lengths on request



Part no.	Description
5/8m-Ff 47mm	5/8 male to F female (CF 61 G1 A/2) HEX 18mm 5/8 x 24 UNEF thread according to SCTE-IPS-SP-403 F female port (3/8 x 32 UNEF) according to IEC 169-24 Accepts 0,6-1,2 Pin Pin diameter $\varnothing$ 1,8mm/0,071" Standard Pin length 47mm. Other Pin lengths on request

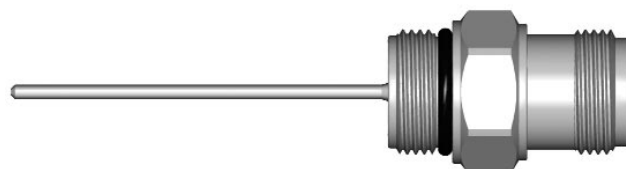

Part no.	Description
5/8m-Nf 47mm	5/8 male to N female HEX 20mm 5/8 x 24 UNEF thread according to SCTE-IPS-SP-403 N female port according to IEC 169-16 Pin diameter $\varnothing$ 1,8mm/0,071" Standard Pin length 47mm. Other Pin lengths on request

PPC Denmark

Vaerkstedsvej 14
 DK-4720 Praestoe
 Denmark

Telephone: +45 55 99 17 22
 Fax: +45 55 99 27 22
 E-mail: ppc@ppc.dk
 Web: www.ppc.dk

PPC

6176 East Molloy Road
 East Syracuse · New York 13057-0278
 USA


Telephone: +1 315 431 7200
 Fax: +1 315 431 7201
 E-mail: ppc@ppc-online.com
 Web: www.ppc-online.com

ADAPTERS


ADAPTERS



Part no.	Description
5/8ms-5/8m 47mm	5/8 male Swivel to 5/8 male (C-KS-KS-SW/2) (Housing to Housing) HEX 19mm 2 x 5/8 x 24 UNEF thread according to SCTE-IPS-SP-403 Pin diameter $\varnothing$ 1,8mm/0,071" Standard Pin length 47mm. Other Pin lengths on request

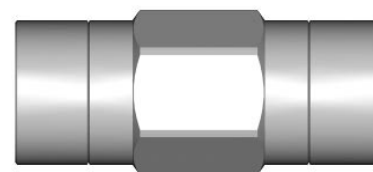

Part no.	Description
5/8f-5/8f	5/8 female to 5/8 female (C-KS-KS-HFS/2) HEX 20mm Accepts Pin 1,6-2,2mm



Part no.	Description
5/8f-ff	5/8 female to F female HEX 20mm 5/8 female port accepts Pin 1,6-2,2mm F female port (3/8 x 32 UNEF) according to IEC 169-24

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC


6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

ADAPTERS




ADAPTERS



Part no.	Description
5/8f-ff Chassis	5/8 female to F female (ICH BAFF KS/2) HEX 19mm 5/8 female port accepts Pin 1,6-2,2mm F female port (3/8 x 32 UNEF) according to IEC 169-24 Accepts 0,6-1,2 Pin



Part no.	Description
PG11m-IECf 47mm	PG11 male to IEC female HEX 20mm PG11 thread (1,41) IEC female port (M14 x 1) according to IEC 169-2 Pin diameter ø 1,8mm/0,071" Standard Pin length 47mm. Other Pin lengths on request

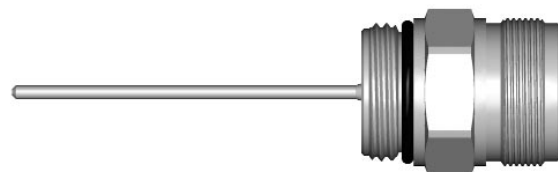

Part no.	Description
PG11m-3,5/12f 47mm	PG11 male to 3,5/12 female HEX 20mm PG11 thread (1,41) 3,5/12 female port (M20 x 1) according to IEC 169-14 Pin diameter ø 1,8mm/0,071" Standard Pin length 47mm. Other Pin lengths on request

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC


6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com


ADAPTERS




ADAPTERS

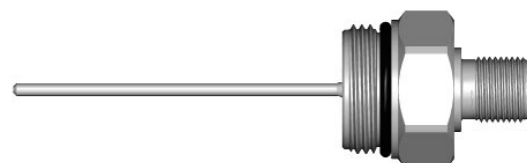

Part no.	Description
PG11m-Ff 47mm	PG11 male to F female HEX 20mm PG11 thread (1,41) F female port (3/8 x 32) according to IEC 169-24 Accepts 0,6-1,2mm Pin Pin diameter $\varnothing$ 1,8mm/0,071" Standard Pin length 47mm. Other Pin lengths on request

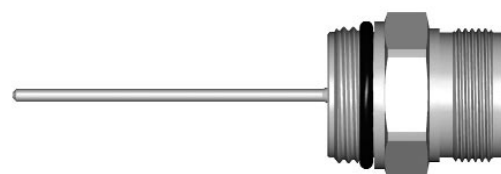

Part no.	Description
PG13,5m-3,5/12f	PG13,5 male to 3,5/12 female HEX 22mm PG 13,5 thread (1,41) 3,5/12 female port (m20 x 1) according to IEC 169-14 Pin diameter $\varnothing$ 1,8mm/0,071" Standard Pin length 47mm. Other Pin lengths on request



Part no.	Description
IECm-5/8f	IEC male to 5/8 female HEX Nut 15mm, HEX Body 20mm IEC male port according to IEC standard 169-2 5/8 female port accepts Pin 1,6-2,2mm

PPC Denmark

Vaerkstedsvej 14
 DK-4720 Praestoe
 Denmark

Telephone: +45 55 99 17 22
 Fax: +45 55 99 27 22
 E-mail: ppc@ppc.dk
 Web: www.ppc.dk

PPC


6176 East Molloy Road
 East Syracuse · New York 13057-0278
 USA

Telephone: +1 315 431 7200
 Fax: +1 315 431 7201
 E-mail: ppc@ppc-online.com
 Web: www.ppc-online.com


ADAPTERS




ADAPTERS



Part no.	Description
IECm-Ff	IEC male to F female HEX 15mm IEC male port according to IEC standard 169-2 F female port (3/8 x 32) according to IEC 169-24 accepts 0,6-1,2mm Pin



Part no.	Description
IECf-IECf	IEC female to IEC female HEX 15mm IEC female port according to IEC standard 169-2



Part no.	Description
IECf-Ff	IEC female to F female HEX 15mm IEC female port according to IEC standard 169-2 F female port (3/8 x 32) according to IEC 169-24 accepts 0,6-1,2mm Pin

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC


6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com


ADAPTERS




ADAPTERS



Part no.	Description
3,5/12m-5/8f	3,5/12 male to 5/8 female HEX Nut 22mm, HEX Body 19mm 3,5/12 male port (M20 x 1) according to IEC 169-14 5/8 female port accepts Pin 1,6-2,2mm



Part no.	Description
3,5/12m-Ff	3,5/12 male to F female HEX Nut 22mm, HEX Body 18mm 3,5/12 male port (M20 x 1) according to IEC 169-14 F female port (3/8 x 32 UNEF) according to IEC 169-24 Accepts 0,6-1,2mm Pin



Part no.	Description
3,5/12m-3,5/12m	3,5/12 male to 3,5/12 male HEX Nut 22mm, HEX Body 18mm 3,5/12 male port (M20 x 1) according to IEC 169-14

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC


6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

ADAPTERS




ADAPTERS



Part no.	Description
3,5/12f-3,5/12f	3,5/12 female to 3,5/12 female HEX 20mm M20 x 1 thread 3,5/12 female port according to IEC 169-14



Part no.	Description
3,5/12f-3,5/12f ext. 150mm and 300mm	3,5/12 female to 3,5/12 female, 150mm extension M20 x 1 thread 3,5/12 female port according to IEC 169-14



Part no.	Description
3,5/12f-3,5/12f Chassis	3,5/12 female to 3,5/12 female for Chassis mounting HEX Nut 22mm, washer ø 25mm M20 x 1 thread 3,5/12 female port according to IEC 169-14

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC


6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com


ADAPTERS




ADAPTERS



Part no.	Description
3,5/12f-Chassis-Ff	3,5/12 female to Chassis mounting to F female HEX Nut 22mm, washer ø 25mm F female accepts 0,6-1,2mm Pin M20 x 1 thread 3,5/12 female port according to IEC 169-14



Part no.	Description
Fm-5/8f	F male to 5/8 female HEX Nut 14mm, HEX Body 20mm F male port according to IEC standard 169-24 5/8 female port accepts Pin 1,6-2,2mm



Part no.	Description
IECm-Fm	IEC male to F male HEX F Nut 14mm, HEX IEC Nut 15mm HEX Body 15mm IEC male port according to IEC standard 169-2 F male port according to IEC standard 169-24

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC


6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com


ADAPTERS




ADAPTERS



Part no.	Description
Fm-IECf	F male to IEC female HEX 14mm F male port according to IEC standard 169-24 IEC male port according to IEC standard 169-2



Part no.	Description
Fm-3,5/12f	F male to 3,5/12 female HEX Nut 14mm, HEX Body 20mm F male port (3/8 x 32 UNEF) according to IEC 169-24 3,5/12 female port (M20 x 1) according to IEC 169-14

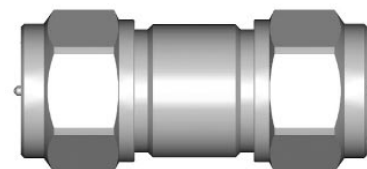

Part no.	Description
Fm-Fm	F male to F male HEX Nut 14mm, Body ø 13mm F male port (3/8 x 32 UNEF) according to IEC 169-24

PPC Denmark

Vaerkstedsvej 14
 DK-4720 Praestoe
 Denmark

Telephone: +45 55 99 17 22
 Fax: +45 55 99 27 22
 E-mail: ppc@ppc.dk
 Web: www.ppc.dk

PPC


6176 East Molloy Road
 East Syracuse · New York 13057-0278
 USA

Telephone: +1 315 431 7200
 Fax: +1 315 431 7201
 E-mail: ppc@ppc-online.com
 Web: www.ppc-online.com


ADAPTERS




ADAPTERS

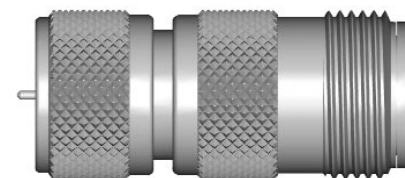

Part no.	Description
Fm-Nf ref.	F male to N female Precision adapter F male port (3/8 x 32 UNEF) according to IEC 169-24 N female port according to IEC standard 169-16

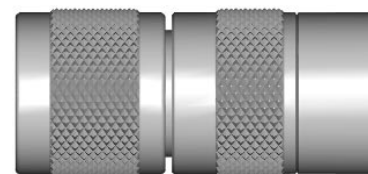

Part no.	Description
Nm-5/8f	N male to 5/8 female N male port according to IEC standard 169-16 5/8 female port accepts Pin 1,6-2,2m



Part no.	Description
Nm-Ff	N male to F female HEX Nut 19mm N male port according to IEC standard 169-16 F female accepts 0,6-1,2mm Pin

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC


6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

ADAPTERS



ENTRY ADAPTERS



Part no.	Description
5/8m-PG11f entry	5/8 male to PG11 female HEX 22mm



Part no.	Description
PG11m-5/8f entry	PG11 male to 5/8 female HEX 22mm



Part no.	Description
PG11m-5/8f entry	PG11 male to 5/8 female HEX 24mm



Part no.	Description
PG11m-PG13,5f entry	PG11 male to PG13,5 female HEX 24mm

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC


6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com


ADAPTERS




ENTRY ADAPTERS




Part no.	Description
PG11m-PG13,5f Teleste ent.	PG11 male to PG13,5 female for Teleste HEX 24mm



Part no.	Description
PG13,5m-5/8f entry	PG13,5 male to 5/8 female HEX 22mm



Part no.	Description
PG13,5m-PG11f entry	PG13,5 male to PG11 female HEX 22mm



Part no.	Description
PG13,5m-Teleste- PG11f	PG13,5m (Teleste) to PG11 female HEX 22mm

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA


Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



PORT CAPS



Part no.	Description
PG11 Port Cap	PG11 Port Cap HEX 22mm



Part no.	Description
5/8 Port Cap	5/8 Port Cap HEX 19mm

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22

Fax: +45 55 99 27 22

E-mail: ppc@ppc.dk

Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200

Fax: +1 315 431 7201


E-mail: ppc@ppc-online.com

Web: www.ppc-online.com


ADAPTERS




TERMINATORS

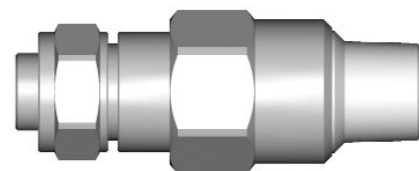

Part no.	Description
IEC-Term75	IEC male Terminator with AC blocking HEX Nut 15mm, HEX Body 18mm Voltage: max 1000v



Part no.	Description
3,5/12m-Term75	3,5/12 male Terminator with AC blocking HEX Nut 22mm, HEX Body 18mm Voltage: max 1000v Return Loss: min. -30 dB from 5 MHz to 1 GHz

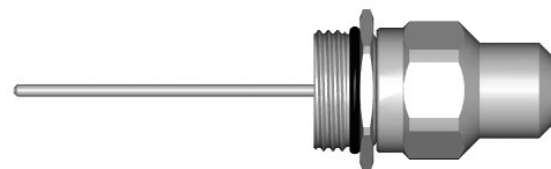

Part no.	Description
PG11m-Term75	PG11 male Terminator with AC blocking HEX Nut 22mm, HEX Body 19mm Maximum Withstanding Voltage 2,500 Volts (@ 60 Hz continuous AC) Pin diameter ø 1,8mm/0,071" Standard Pin length 47mm. Other Pin lengths on request

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC


6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com


ADAPTERS



TERMINATORS

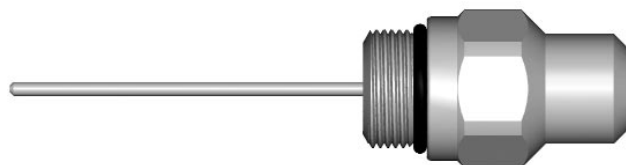

Part no.	Description
5/8m-Term75	5/8 male Terminator with AC blocking HEX Body 19mm Voltage: max 1000v Pin diameter $\varnothing$ 1,8mm/0,071" Standard Pin length 47mm. Other Pin lengths on request

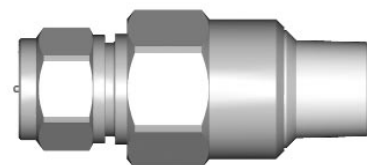

Part no.	Description
FM-Term75	F male Terminator with AC blocking Hex Nut 14mm, HEX Body 19mm Voltage: max 1000v

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA


Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

JUMPERS





JUMPER CABLES



PPC Denmark has developed a new serie of Jumper Cables where quality, electrical parameters as well as easy installing on space restricted areas have been given the pride of place.

Jumper Cables can be provided in all combinations with following cable lengths and interfaces:

KSM (5/8 male) – Pin length 47mm.

KSF (5/8 female) – accepts Pin 1,6-2,2mm.

PG11 male – Pin length 47mm.

F male

IEC male

IEC male 90 degree swivel

3,5/12 male

Mentioned interfaces can also be provided in combination with a direct installation on any distribution and trunk cables.

Standard Cable length: "A" (other lengths on request)

0,76 meter ~ 30 inch.

0,91 meter ~ 36 inch.

1,00 meter ~ 39 inch.

1,30 meter ~ 50 inch.

1,90 meter ~ 75 inch.



PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22

Fax: +45 55 99 27 22

E-mail: ppc@ppc.dk

Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200


Fax: +1 315 431 7201

E-mail: ppc@ppc-online.com

Web: www.ppc-online.com



ALL INTEGRATED POWER JUMPERS

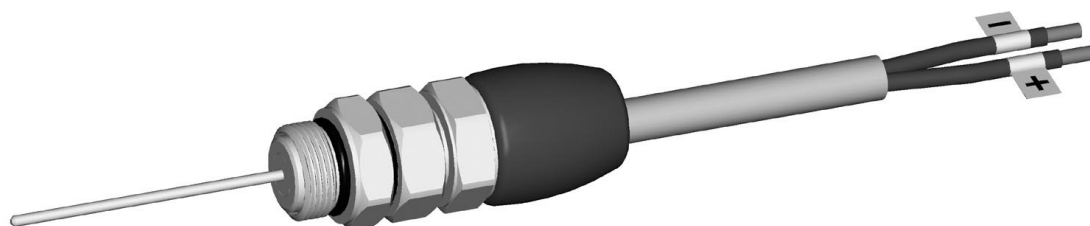

5/8 male swivel Power Jumper with cable mounted and Macro melted for proper water resistance.

Standard Cable lengths from 1 to 10 cm.

Other lengths and interfaces on request.

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

EX CONNECTORS



EX CONNECTORS



EX COMPRESSION CONNECTORS



Part no.	Description
EX 6-49/83	American RG6 Standards 60% thru Quad Shield.



Part no.	Description
EX 6-51/83	European RG6 type with 4,8/4,9 mm Dielectric 6, 7 - 7,5mm Sheath.



Part no.	Description
EX 6-51/83 Green	European RG6 type with 4,8/4,9mm Dielectric Dutch COAX12 Cable with green PE Sheath.

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

EX CONNECTORS



EX COMPRESSION CONNECTORS



Part no.	Description
EX 59-39/79	American RG59 Standard



Part no.	Description
EX 59 HE	F59 HEC-2 Headend cable



Part no.	Description
EX 7	American RG7 Standards 60% thru Quad Shield



Part no.	Description
EX 11	American RG11 Standards

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

EX CONNECTORS



DROP JUMPERS/FLY LEADS



RG59, RG59HE and RG6 Series in various combinations and lengths with EX F and BNC Compression Connectors.

Contact our sales department with your requirements.



PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

TOOLS





RIPLEY TOOLS



SDT - RG59 and RG6 Drop Trimme



UDT - Universal Drop Trimmer, 59, 6, 7, 11 cables



Compression Tool - EX

CAT	EX-59/6
CAT	EX-7/11
CAT AS	EX-59/6/7/11



TW-AH Targue Wrenches

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



RIPLEY TOOLS



Insertion Tool for F Connectors



CR - HEX Crimp Tool



CST - Coring Stripping Tool



QRT - Coring and Stripping Tool and a Jacket stripping Tool for QR cables

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



JCST-QR Jacket Coring Stripping Tool



JCST-QR Jacket Coring Stripping Tool



Flexible Feeder Stripping Tool



CC-100 Center Conductor Cleaner

CC-200 Center Conductor Scraper

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22

Fax: +45 55 99 27 22

E-mail: ppc@ppc.dk

Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200

Fax: +1 315 431 7201


E-mail: ppc@ppc-online.com

Web: www.ppc-online.com



PPC PREP TOOLS

PPC Prep Tool for Copper Cables

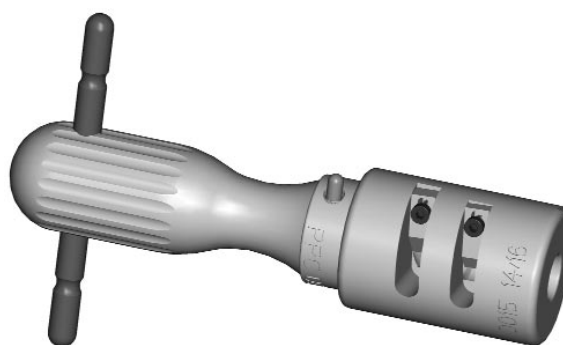

PPC Prep Tool for Copper Braided Cables



PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC


6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

Please check with our Sales department regarding the Prep Tools.



INSTRUCTIONS FOR PPC PREP TOOLS

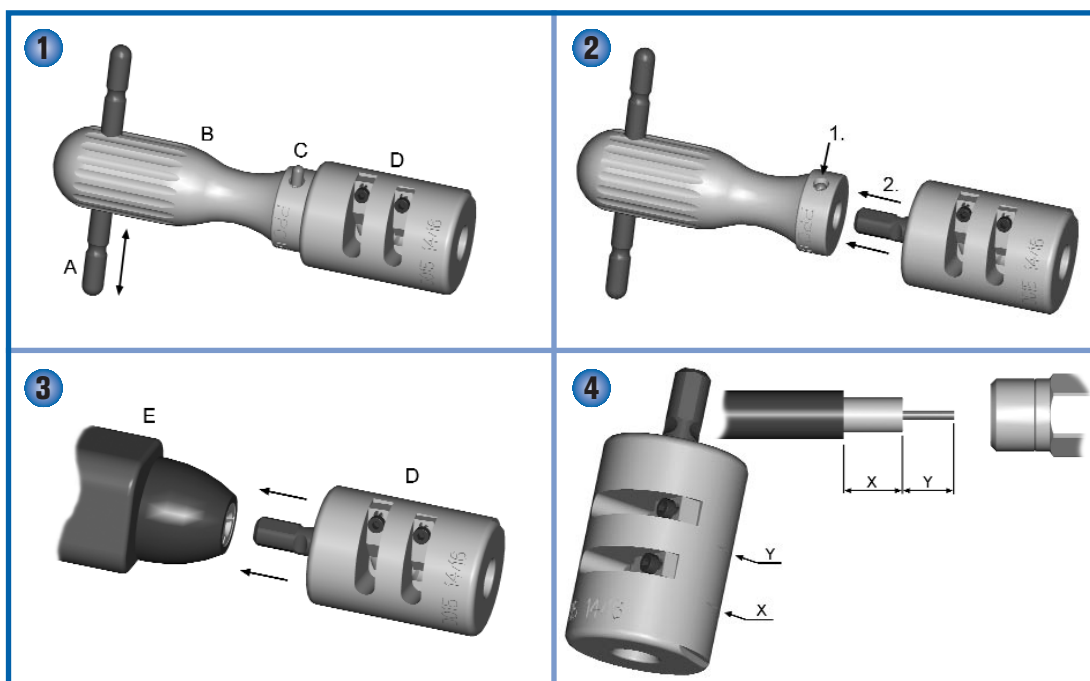

- 1 D. Main Body "in picture (D015), same procedure for all other tools".
B. Handle.
A. Handle stick, can be moved to increase strength of rotation.
C. Lock pin.
- 2 Push down lock pin "1", and then pull or push prep-tool on/off the handle "2".
- 3 Mounting of Main Body "D" with locking adaptor on a power drill "E".
- 4 "X" and "Y", check marking for correct stripping of cable.

1. Cable Preparation

- I. Cut end of cable squarely.
- II. Be sure to remove cut-off burr, or flare, of center konduktor and outer konduktor.
- III. Remove dielectric material completely from center konduktor over the full strip length.
- IV. For Bamboo cables make sure that the center konduktor stays in the centre of the cable.

2. PPC Prep Tools

PPC Prep Tools can be used manually or with a power drill. When using a power drill set on low speed. See above drawings.

3. Cable Stripping

Insert cable to tool and push forward while turning the handle (manual) until you reach the stop which is set according to the strip lengths needed for the actual cable/connector.

A check marking is done on the main body 4 "X" and "Y".

4. Connector Installation

- 1) Install connector body to equipment port. Fully hand tighten, then an additional 1/8 to 1/4 turn with wrench.
If you use swivel version connectors go to 2).
- 2) Slide back nut onto cable.
- 3) Insert prepared cable fully into connector.
- 4) While holding cable in place fully hand tighten the backnut.
- 5) While holding the connector body with a wrench, tighten the backnut until positive stop.

Final installation to equipment and tighten seizure screw inside of equipment.

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk


PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



INSTRUCTIONS FOR BRAID AND FOIL PREP TOOLS

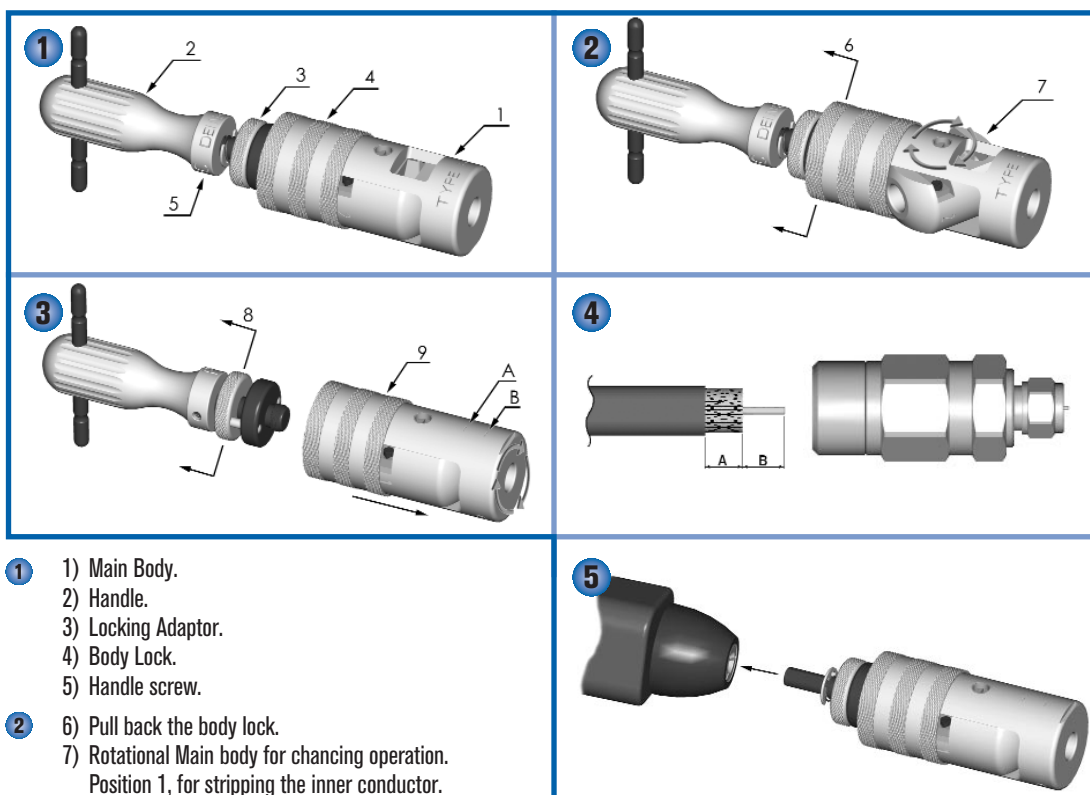

- 1) Main Body.
2) Handle.
3) Locking Adaptor.
4) Body Lock.
5) Handle screw.
- 6) Pull back the body lock.
7) Rotational Main body for chancing operation.
Position 1, for stripping the inner conductor.
Position 2, for stripping the outer conductor.
- 8) Pull back locking adaptor for demounting the main body.
9) Rotate main body for demounting.
"A" and "B" Check marking for correct stripping length of cable.
- 4) Cable ready to be mounted on connector.
- 5) Mounting of Main Body with locking adaptor on a power drill.

1. Cable Preparation

- I. Cut end of cable squarely.
- II. Be sure to remove cut-off burr, or flare, of center konduktor and outer konduktor.
- III. Remove dielectric material completely from center konduktor over the full strip length.
- IV. For Bamboo cables make sure that the center konduktor stays in the centre of the cable.

2. PPC Prep Tools

PPC Prep Tools can be used manually or with a power drill. When using a power drill set on low speed. See above drawings.

3. Cable Stripping

- 1) Place the rotational Main Body 2 in position 1 for stripping the inner konduktor. Insert cable to tool and push forward while turning the handle (manual) until you reach the stop that is set according to the strip lengths needed for the actual cable/connector.
- 2) Turn the rotational Main Body to position 2 for stripping the outer konduktor and follow same procedure as mentioned in 3.1.

4. Connector Installation

- 1) Install connector body to equipment port. Fully hand tighten, then an additional 1/8 to 1/4 turn with wrench.
If you use swivel version connectors go to 2).
 - 2) Slide back nut onto cable.
 - 3) Insert prepared cable fully into connector.
 - 4) While holding cable in place fully hand tighten the backnut.
 - 5) While holding the connector body with a wrench, tighten the backnut until positive stop.
- Final installation to equipment and tighten seizure screw inside of equipment.

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

CABLE DATA





CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE

PPC type	Cable manufacture	Cable name	innercond	dielectric	outer cond.	sheath
A025	ABB	02510 SAT 1 PLUS 0,75/4,8 AL/PE	0,75	4,80	5,25	6,80
A025	ABB	02506 SAT 2 0,75/4,8 AL/PE	0,75	4,80	5,25	6,80
A025	ABB	06371 compact ktv 0,7/4,8HV	0,75	4,80	5,50	6,80
A025	ABB	06314 SOLID KTV 0,75	0,75	4,80	5,50	6,90
A025	ABB	06302 NETFLEX KTV 1,0/4,8 CV	1,05	4,80	5,50	6,80
A025	ABB	02395 NETFLEX KTV 1,0/4,8 PE	1,05	4,80	5,50	6,90
A025	ACOME	T1724 C6	0,75	4,70	5,30	7,00
A025	ALCATEL	25 VRM/PRIM	0,75	4,70	5,30	7,20
A025	ALCATEL	311 C	1,08	4,75	5,45	6,80
A025	ALCATEL	TV 6 CW	1,02	4,57	5,20	6,80
A025	ALCATEL	222P	0,80	4,75	5,45	6,60
A025	ALCATEL	21 VAI/CA/PA/CA	1,02	4,60	5,40	6,90
A025	ALCATEL/KABELHEYDT	75F 1,0/4,5 AIF	1,00	4,45	5,15	6,35
A025	ALCATEL/SENEFFOISE	6 S (TA) V/P BP VP/PM	0,72	4,65	5,40	7,20
A025	ALCATEL/SENEFFOISE	59 F (TA) V-QF/P	0,81	3,65	5,30	6,90
A025	ALCATEL/SENEFFOISE	59 S (TA) V-QS/P	0,58	3,65	5,30	6,90
A025	ALCATEL/SENEFFOISE	6 F (TA) V/P BP VP/PM	1,02	4,65	5,40	7,00
A025	BEDEA	TELESS 111	1,10	4,90	5,50	6,80
A025	BEDEA	0,7/4,8 (DK)	0,72	4,65	5,25	7,20
A025	BEDEA	TELESS 100	1,00	4,90	5,60	7,00
A025	BEDEA	0,72/4,8z	0,72	4,80	5,40	7,10
A025	BEDEA	0,7/4,5 s (CH)	0,75	4,50	5,20	6,60
A025	BEDEA	0,7/4,5z	0,75	4,50	5,20	6,50
A025	BEDEA	TELESS 88	0,75	4,50	5,25	6,50
A025	BEDEA	GOAX 12 (NL)	0,72	4,65	5,25	7,00
A025	BEDEA	1,1/4,9 C-PE	1,12	4,90	5,50	7,30
A025	BEDEA	0,72/4,8 (DIN 0887)	0,72	4,80	5,40	7,10
A025	BELDEN	20 AWG 59/U - 1186A/1187A/1188A	0,81	3,66	0,00	6,73
A025	BELDEN	20 AWG 59/U 8281	0,81	5,03	5,70	7,75
A025	BELDEN	18 AWG 6/U	0,95	4,57	5,20	6,99
A025	BELDEN	18 AWG 6/U - 1189A/1190A/1191A	0,95	4,57	5,50	7,49
A025	BELDEN	RG6 STAND.D0UB. II	1,02	4,57	5,40	6,90
A025	BELDEN (POPE)	H 105	0,70	4,60	5,70	7,20
A025	BELDEN (POPE)	RG 6CU	1,00	4,60	5,40	6,90
A025	BELDEN (POPE)	RG 6	1,02	4,57	5,40	6,90
A025	BELDEN (POPE)	H 125 AL	1,00	4,80	5,30	6,80
A025	BELDEN (POPE)	H 109 CU	1,00	4,70	5,30	6,30
A025	BELDEN (POPE)	H 114	0,75	4,70	5,30	6,80
A025	BIEFFE	12 IC	1,15	4,90	5,60	6,80

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE

PPC type	Cable manufacture	Cable name	innercond	dielectric	outer cond.	sheath
A025	BIEFFE	C-0-12/R CATV	1,15	5,10	5,70	7,00
A025	BIEFFE	9 CA	0,75	4,80	5,30	6,80
A025	BIEFFE	C80 ST	0,75	4,80	5,30	6,70
A025	BIEFFE	C80	0,75	4,80	5,30	6,70
A025	BIEFFE	9 CU	0,75	4,80	5,30	6,80
A025	BIEFFE	C-0-10 SAT	1,00	4,70	5,30	6,70
A025	BIEFFE	C-0-12/A SAT	1,15	5,10	5,70	7,00
A025	BIEFFE	12 C/CE	1,10	4,90	5,30	6,70
A025	BIEFFE	115 EA	1,15	4,90	5,60	6,70
A025	BIEFFE	C80 AG	0,75	4,80	5,36	6,70
A025	BIEFFE	12 ICE	1,15	4,90	5,60	6,80
A025	BIEFFE	12 ICAG	1,15	5,10	5,60	6,70
A025	BIEFFE	12 ICS	1,15	4,90	5,60	6,70
A025	BOSCH	CK 1175	0,75	4,80	5,20	6,80
A025	BOSCH	CKE 11	0,75	4,80	5,20	6,80
A025	BOSCH	CKG 12	0,77	4,60	5,10	6,60
A025	CAVEL	SAT 699	1,00	4,50	5,10	6,50
A025	CAVEL	1210W/E/S/A-1212-CU113	1,13	5,00	5,50	6,70
A025	CAVEL	11/50 FC	1,10	5,00	5,40	7,80
A025	CAVEL	0,75/4,8 PE	0,75	4,80	5,45	7,10
A025	CAVEL	CU 33/ST33/AG33/CS75/KF75/AL75	0,75	4,80	5,30	6,50
A025	CAVEL	KF113/AL113/SAT703/SAT752	1,13	4,80	5,40	6,60
A025	CCH DOUR	6FT50P / 6FT50V	1,02	4,70	5,20	7,20
A025	CCH DOUR	65ST50P 7 65ST50V	0,72	4,70	5,20	7,00
A025	COMMSCOPE	6 STANDARD / TRISHIELD	1,02	4,57	5,50	7,00
A025	COMMSCOPE	59 SUPER SHIELD 53%+35%	0,81	3,66	5,20	6,73
A025	DÄTWYLER	FS-0630-U	0,75	4,80	5,25	6,80
A025	DÄTWYLER	FS0614	0,75	4,80	5,40	6,80
A025	DÄTWYLER	FS-0480-U	1,07	4,80	5,30	6,80
A025	ERICSSON	KTV 1,0/4,8 CV	1,00	4,80	5,60	6,80
A025	ERICSSON	KTV 0,7/4,8 HV / HE	0,70	4,80	5,60	7,20
A025	EUPEN	705RT3 0,72/4,75	0,72	4,75	5,30	6,90
A025	EUPEN	705CRT7 - 7059SP	1,03	4,57	5,20	6,80
A025	EUPEN	C6 705CRT5V / C6 705CRT5V	1,00	4,60	5,20	6,90
A025	EUPEN	C5 705CR2V / C5 705CRT2	1,00	4,60	5,20	6,90
A025	F & G	0,7/4,8 AF 127 320 00	0,70	4,80	5,30	7,00
A025	F & G	0,7/4,8 F 127 315 00	0,70	4,80	5,30	7,00
A025	FUJIKURA	S-SC-FS	1,05	4,95	5,70	7,60
A025	ITC		1,13	4,60	0,00	6,20

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

CABLE DATA

CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE



PPC type	Cable manufacture	Cable name	innercond	dielectric	outer cond.	sheath
A025	ITC	EXTRA100+AMEL100	1,02	4,60	0,00	6,40
A025	ITC	100+110+110CU	0,75	4,80	0,00	6,40
A025	ITC	SAT 300	1,13	5,00	0,00	6,70
A025	ITC	125+135	1,00	4,50	0,00	6,40
A025	ITC	120+130/4+139+140+140Z	1,13	5,00	0,00	6,80
A025	ITC	141Z+141SP+150+150/16	1,13	5,00	0,00	6,80
A025	ITC	160+333ST+333RB+333SB+333R	1,13	5,00	0,00	6,80
A025	ITC	340+350	1,13	5,00	0,00	6,80
A025	ITC	DIGITAL SAT	1,13	5,00	0,00	7,20
A025	KABELMETAL	0,8/4,8 CU+FCU	0,80	4,80	5,60	6,90
A025	NKF	COAX 12PE	0,70	4,60	5,25	6,80
A025	NKF	COAX 12 PVC	0,70	4,60	5,25	7,20
A025	NKT	KJ 0712	0,70	4,80	5,00	6,90
A025	NOKIA	1,1/5,0AF+F	1,10	5,00	0,00	6,80
A025	NOKIA	0,7/4,5AF	0,70	4,50	0,00	6,50
A025	NOKIA	0,7/4,8F	0,70	4,80	0,00	7,00
A025	NOKIA	TELLU 13	1,00	4,80	5,60	7,00
A025	NOKIA	NK11AB+CN+CB+CN/8	1,10	5,00	5,60	6,80
A025	NOKIA	1,0/4,8AF	1,00	4,80	0,00	6,80
A025	PIRELLI CABLES	Y1100	1,00	4,95	5,60	7,10
A025	RAYDEX/CDT	CT100 PVC/PE)	1,00	4,45	5,15	6,45
A025	RAYDEX/CDT	RF100	1,00	4,45	5,05	6,55
A025	RAYDEX/CDT	CTF100 (FOAM)	1,00	4,80	5,50	6,80
A025	RAYDEX/CDT	URM203	1,12	5,10	5,70	7,25
A025	RAYDEX/CDT	SAT100 (PVC)	1,00	4,80	5,35	6,65
A025	RAYDEX/CDT	CTF15 (PVC)	0,75	4,60	5,15	6,80
A025	SAT CABLES	SAT 0,8/5,2 PE/PVC	0,80	5,20	5,45	7,60
A025	SAT CABLES	0,75/4,8-72016+72018	0,75	4,80	5,00	7,40
A025	SIEMENS CABLES	S43010-LA5	1,13	5,00	5,30	7,20
A025	SIEMENS CABLES	2YSTCY 0,75/4,8 + YCY	0,75	4,80	5,30	6,50
A025	SIEMENS CABLES	2YTC2Y 0,75/4,8	0,72	4,80	5,30	7,50
A025	SIEMENS CABLES	2YSTCSTY 0,72/4,8	0,72	4,80	5,30	6,90
A025	SUHNER CABLES	G 05273-01	0,81	4,80	5,50	6,80
A025	SUHNER CABLES	G 05233-13	0,73	4,80	5,40	7,00
A025	TIMES FIBER	RG59 QUADSHIELD	0,81	3,66	5,21	6,73
A025	TIMES FIBER	RG6 TYPES STD.-TRISHIELD	1,02	4,57	5,40	6,95
A025	TRILOGY	RG59 QUADSHIELD	0,81	3,66	5,26	6,88
A025	TRILOGY	RG6 TYPES STD.TRISHIELD	1,02	4,57	5,50	7,10
A031	AGOME	WT680 C6	1,15	5,20	6,10	8,00

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE

PPC type	Cable manufacture	Cable name	innercond	dielectric	outer cond.	sheath
A031	ALCATEL	23 VRIM/PRIM	0.80	5.20	5.90	7.70
A031	ALCATEL	322P	0.90	5.40	5.95	7.00
A031	ALCATEL/KABELRHEYDT	75F 1,1/5,2 AIF	1.10	5.20	6.10	7.40
A031	ALCATEL/SENEFFOISE	6 F (TA) V-OF/P	1.02	4.65	6.30	7.90
A031	ALCATEL/SENEFFOISE	6 S (TA) V-OS/P	0.72	4.65	6.30	7.90
A031	CAVEL	KF13AS/PE	1.25	5.50	6.20	8.00
A031	COMMSCOPE	6 SUPER SHIELD 60%+40%	1.02	4.57	6.15	7.62
A031	CORTAILLOD	HF75C 1,2/5,6 FLEX	1.20	5.40	5.80	7.00
A031	ERICSSON	KTV 1,2/5,3 CV	1.20	5.30	6.00	7.20
A031	ERICSSON	KTV 1,2/5,3 CE	1.20	5.30	6.00	7.20
A031	ITC	110C/U 74	1.00	5.30	0.00	7.30
A031	KABELMETAL	CAF 1,1/5,3 Cu	1.14	5.30	5.80	7.40
A031	NKT	KJFF 0712	0.70	4.80	6.20	7.40
A031	RAYDEX/CDT	CTF113	1.13	5.10	5.80	7.10
A031	RAYDEX/CDT	CT125PE/PVC	1.25	5.50	6.20	7.80
A031	RAYDEX/CDT	RF125	1.25	5.50	6.20	7.80
A031	TIMES FIBER	RG6 QUADSHIELD	1.02	4.57	6.12	7.54
A031	TRILOGY	RG6 QUADSHIELD	1.02	5.57	6.17	7.80
A043	ABB	06365 SUPER KTV 0.8/3,6	0.80	3.60	4.40	5.60
A043	ACOME	T3068/L3629/T3197	0.80	3.70	4.30	5.60
A043	ALCATEL	25 VACA/PACA	0.81	3.70	4.50	5.90
A043	ALCATEL	24 VRIC/PRIC	0.80	3.70	4.20	5.90
A043	ALCATEL	TV 59 CW	0.81	3.70	4.30	6.00
A043	ALCATEL/KABELRHEYDT	75F 0.8/3,7 AIF	0.80	3.70	4.60	6.00
A043	ALCATEL/SENEFFOISE	59 F (TA) V/P BP VP/PM	0.81	3.65	4.40	6.00
A043	ALCATEL/SENEFFOISE	59 S (TA) V/P BP VP/PM	0.58	3.65	4.40	6.00
A043	BEDEA	TELESS 80	0.80	3.70	4.50	5.90
A043	BEDEA	TELESS 77	0.70	4.50	4.80	6.25
A043	BEDEA	TELESS 66	0.60	3.70	4.40	5.90
A043	BELDEN	20 AWG 59/U	0.81	3.63	4.50	6.10
A043	BELDEN	RG59 STAND.D0UB.II	0.81	3.63	4.50	6.10
A043	BELDEN (POPE)	H 124	1.00	4.40	4.70	5.80
A043	BELDEN (POPE)	H 106	0.58	3.70	4.80	6.00
A043	BELDEN (POPE)	RG 59	0.81	3.66	4.50	6.00
A043	BIEFFE	C-0-8 SAT	0.80	3.90	4.50	6.20
A043	CAVEL	1010N	1.00	4.50	4.90	6.20
A043	CAVEL	CU 22	0.65	4.10	4.50	5.60
A043	CCH DOUR	59 S-P / 59 S-V	0.64	3.70	0.00	6.50
A043	CCH DOUR	59 F-P / 59 F-V	0.81	3.70	0.00	6.40

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE

PPC type	Cable manufacture	Cable name	innercond	dielectric	outer cond.	sheath
A043	COMMSCOPE	59 STANDARD / TRISHIELD	0.81	3.66	4.50	6.10
A043	ERICSSON	KTV 0.8/3.6 CV	0.80	3.60	4.30	5.60
A043	EUPEN	7CWD4CRT2 - 5 - 5V	0.80	3.60	4.30	5.80
A043	EUPEN	704RT1 0.82/3.7 - 7045	0.82	3.70	4.40	5.80
A043	EUPEN	704TT3 RG59 U - SP7043	0.64	3.70	4.80	5.80
A043	EUPEN	704RT3 0.58/3.7 - 7044	0.58	3.70	4.40	5.80
A043	F & G	0.8/3.7 f 127 317 00	0.80	3.70	0.00	6.00
A043	F & G	0.7/4.5 zv 127 319 00	0.70	4.50	0.00	6.30
A043	KABELMETAL	0.6/3.7 CU	0.60	3.70	4.40	5.40
A043	KABELMETAL	0.7/4.4 CU+DCU	0.70	4.40	0.00	7.40
A043	NOKIA	TELLU 17	0.75	3.85	4.60	6.00
A043	NOKIA	0.6/3.7	0.60	3.70	0.00	6.00
A043	RAYDEX/CDT	RA701/703/7707/708	0.58	3.70	4.30	6.15
A043	RAYDEX/CDT	CTF81 (PVC)	0.81	3.65	4.35	6.00
A043	SIEMENS CABLES	2VCY 0.6/3.7	0.60	3.70	0.00	5.70
A043	TIMES FIBER	RG59 TYPES STD.-TRISHIELD	0.81	3.66	4.60	6.10
A043	TRILOGY	RG59 TYPES STD.-TRISHIELD	0.81	3.66	4.50	6.12
A090	RAYDEX/CDT	CT100RBS	1.00	4.45	5.15	8.00
A125/15	BELDEN	RG7 STAND.DOUB. II	1.29	5.72	6.60	8.10
A125/15	BELDEN (POPE)	RG 7 STD.	1.29	5.72	6.60	8.10
A125/15	COMMSCOPE	7 STANDARD / SUPER SHIELD	1.30	5.72	7.30	8.59
A125/15	PIRELLI CABLES	Y1507+Y1518	1.27	5.50	6.50	8.50
A125/15	RAYDEX/CDT	CTFA130	1.30	6.00	6.75	8.64
A125/15	TIMES FIBER	7 SERIES QUAD. 60-36%	1.29	5.72	7.26	8.64
A125/15	TIMES FIBER	7 SERIES STD.-TRISHIELD	1.29	5.72	6.63	8.20
A125/15	TRILOGY	RG7 TYPES STD.	1.30	5.72	6.55	8.18
A125/15	TRILOGY	RG7 QUADSHIELD	1.30	5.72	7.32	8.80
B004	ACOME	U2455/U2457/L3008/L3764	1.70	6.90	7.70	10.70
B004	ALCATEL	TV 11 CW	1.63	7.30	8.00	10.20
B004	ALCATEL	14 VAC/PA/CA	1.63	7.30	8.10	10.00
B004	ALCATEL	11 VRtC	1.70	6.90	7.80	10.40
B004	ALCATEL/KABELRHEVDT	75F 1.6/7.3 CE+CT	1.60	7.30	7.80	9.80
B004	ALCATEL/KABELRHEVDT	75F 1.6/7.3 AIF	1.60	7.30	8.20	10.10
B004	ALCATEL/SENEFFOISE	11 F (TA) V/P BP VP/PM	1.63	7.25	8.00	10.30
B004	BEDEA	TELESS 160	1.60	7.30	8.00	10.30
B004	BEDEA	TELESS 160T	1.60	7.30	8.30	10.60
B004	BEDEA	1.6/7.3 C-PE	1.60	7.30	8.30	9.70
B004	BELDEN	RG11/U TYPE 9292	1.63	7.24	7.80	10.30
B004	BELDEN	RG11 STAND.DOUB. II	1.63	7.11	8.00	10.20

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE

PPC type	Cable manufacture	Cable name	innercond	dielectric	outer cond.	sheath
B004	BELDEN (POPE)	NK MCUM 1.17/3	1,10	7,35	7,80	10,00
B004	BELDEN (POPE)	PRG 11 CU FOAM PE/PVC	1,55	7,25	7,90	10,10
B004	BELDEN (POPE)	PRG 11 AL PE/PVC	1,55	7,25	7,90	10,10
B004	BELDEN (POPE)	RG 11 PE/PVC	1,63	7,11	8,00	10,20
B004	BELDEN (POPE)	H 43	1,66	7,15	7,80	9,80
B004	BELDEN (POPE)	RG 11	1,63	7,11	8,00	10,20
B004	BIEFFE	C-0-165 SAT	1,65	7,20	7,90	10,00
B004	BIEFFE	C-0-165/R CATV	1,65	7,20	7,60	9,70
B004	CAVEL	17/73 FC	1,63	7,20	7,90	10,10
B004	CAVEL	SAT704/-5/CATV704/11/16	1,65	7,30	8,00	10,30
B004	CCH DOUR	11 F-P / 11 F-V	1,63	7,25	0,00	10,60
B004	COMMSCOPE	11 STANDARD SHIELD 60% BR.	1,63	7,11	7,89	10,03
B004	DELTA	TR165/725	1,65	7,20	7,95	10,10
B004	ERICSSON	KTV 1,6/7,3 CV / CE / CEL	1,60	7,30	8,10	10,10
B004	EUPEN	707CRT5	1,63	7,11	7,60	10,10
B004	EUPEN	707RT1 1,63/725	1,63	7,25	8,00	10,20
B004	F & G	1,6/7,3 AF 127 530 00	1,60	7,30	0,00	10,50
B004	ITC	PA 155 SAT	1,55	7,30	0,00	10,30
B004	ITC	PA 163 SAT ALL	1,63	7,30	7,80	10,30
B004	KABELMETAL	CAF 1,6/7,3 Cu	1,60	7,30	7,80	9,80
B004	NOKIA	NK16CN+CN/8	1,60	7,30	8,00	10,20
B004	NOKIA	1,6/7,3AF+F	1,60	7,30	7,80	10,50
B004	PIRELLI CABLES	Y1606+Y1628	1,67	7,25	8,30	10,30
B004	RAYDEX/CDT	CT167PE	1,67	7,28	7,98	10,10
B004	RAYDEX/CDT	RAT21	1,67	7,28	7,88	10,30
B004	RAYDEX/CDT	CTF167PVC	1,67	7,28	7,98	10,10
B004	SUHNER CABLES	S 07273-01	1,57	7,25	8,10	10,30
B004	SUHNER CABLES	S 07233-05	1,57	7,25	8,20	10,30
B004	TIMES FIBER	RG11 TYPES STD.-TRISHIELD	1,63	7,11	8,03	10,20
B004	TRILOGY	RG11 STD.	1,63	7,11	7,95	10,08
B013	BELDEN (POPE)	COAX 6 SAS	1,61	7,55	8,20	11,10
B014	ALCATEL/KABELRHEVOT	750 1,7/7,0 CEF+CBEF	1,70	6,90	7,20	10,20
B014	ALCATEL/KABELRHEVOT	750 1,7/7,0 CER	1,70	6,90	7,40	10,50
B014	NOKIA	NK17CN	1,70	6,90	7,60	10,40
B023	ABB	06327 STARFLEX KTV 1,6/7,3 CEL	1,55	7,30	7,85	10,30
B023	ABB	06301 STARFLEX KTV 1,6/7,3 CE	1,55	7,30	7,85	10,30
B023	ABB	06369 STARFLEX KTV 1,6/7,3 CV	1,55	7,30	7,85	10,30
B023	ABB	02401 KTV D8 1,6/7,3 CU/PE	1,55	7,30	7,60	9,50
B023	ABB	06392 STARFLEX KTV 1,6/7,3 PE	1,55	7,30	7,85	10,30

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

CABLE DATA

CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE



PPC type	Cable manufacture	Cable name	innercond	dielectric	outer cond.	sheath
B028	ALCATEL	1,7/75 CCFP	1,70	6,90	8,70	11,00
B028/B034	ACOME	L2364/L4958/L2365/L3341	1,70	6,90	8,40	11,00
B032	CZECH	HF 75/76	1,20	6,30	8,00	11,90
B032	CZECH	VRCZE 75/6,5	1,20	6,30	8,40	11,90
B034	ACOME	L3762A/L3763A	1,70	6,90	0,00	10,70
B034	ALCATEL	1,7/75 CCPE+	1,70	6,90	7,40	11,00
B034	PIRELLI CABLES	GE B4 272-14303	1,70	6,90	0,00	11,00
B034	SAT CABLES	B4 SAT1,7/6,9 2969	1,70	6,90	7,20	10,60
B035	ACOME	W2119/W2120	1,00	6,60	0,00	9,30
B039	ALCATEL	C2 VRM/PRM	1,00	6,70	7,50	9,40
B039	ALCATEL/SENEFFOISE	11 S (TA) V/P BP VP/PM	1,10	7,25	8,00	10,30
B039	BEDEA	1,1/73	1,10	7,30	7,50	10,00
B039	BEDEA	1,1/73	1,10	7,25	8,00	10,00
B039	BEDEA	1,1/73	1,10	7,30	8,00	10,50
B039	BELDEN (POPE)	MCUM 1,1/73	1,10	7,30	7,80	10,00
B039	BOSCH	OK 875	1,10	7,30	7,50	10,60
B039	BOSCH	OK 875 TS	1,10	7,30	7,50	10,60
B039	CCH DOUR	11 S-P / 11 S-V	1,10	7,25	0,00	10,50
B039	DÄTWYLER	FS-0633-U	1,10	7,25	0,00	10,20
B039	DÄTWYLER	FS-0602-U	1,10	7,25	0,00	9,50
B039	DÄTWYLER	FS0716-U	1,10	7,25	0,00	10,20
B039	EUPEN	707RT3 1,1/7,25	1,11	7,25	8,00	10,20
B039	KABELMETAL	CAD 1,1/7,3 Cu	1,10	7,30	7,70	10,60
B039	NKT	KJ 1108	1,10	7,30	7,50	10,20
B039	PIRELLI CABLES	URM57	1,15	7,25	8,00	10,30
B039	RAYDEX/CDT	RAY77	1,20	7,24	7,92	10,30
B039	RAYDEX/CDT	URM57	1,15	7,25	8,15	10,30
B039	SUHNER CABLES	GX 07273	1,20	7,25	8,10	10,30
B040	BEDEA	L6	1,70	6,95	7,20	10,50
B040	CZECH	VRCZE 75/6,4	1,40	6,00	7,40	9,80
B040	DÄTWYLER	FS-0715-U	1,56	7,15	0,00	10,30
B040	EUPEN	7061-1/4"	1,40	6,50	7,50	9,70
B040	KABELMETAL	CF 1/4" CU 2Y	1,50	6,00	7,50	9,90
B040	KABELMETAL	CAW 1,5/6,0 CU	1,50	6,00	7,50	10,00
B040	NKF	BAMBOO 6 - +/- ARMoured	1,70	6,95	7,20	10,00
B040	SAT CABLES	B4 SAT STD.	1,70	6,90	7,20	10,00
B040	SIEMENS CABLES	2YHOTK2Y 1,7/6,9	1,70	6,90	0,00	10,40
B042	BELDEN	15 AWG 6/U - 1160A OVERSIZED	1,40	6,53	0,00	9,40
B042	BIEFFE	C-0-14/R CATV	1,40	6,50	7,10	9,50

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE

PPC type	Cable manufacture	Cable name	innercond	dielectric	outer cond.	sheath
B042	BIEFFE	C-0-14 SAT	1,40	6,50	7,10	9,50
B042	CAVEL	1,0/6,5 PE	1,00	6,50	7,20	9,70
B042	EUPEN	706RT1 1,4/6,5 - 7063	1,40	6,50	7,20	9,40
B042	ITC	140Z INT	1,00	6,30	0,00	9,60
B042	KABELMETAL	CAD 1,0/6,5 Cu	1,00	6,50	6,90	9,80
B042	NOKIA	1,0/6,6	1,00	6,60	0,00	9,00
B042	PIRELLI CABLES	Y1529	1,27	5,50	6,90	9,30
B042	SIEMENS CABLES	2VCY 1,0/6,5+YCCY	1,00	6,50	0,00	9,20
B055	ALCATEL/SENEFFOISE	11 F (TA) V-QF/P	1,63	7,25	8,90	10,90
B055	COMMSCOPE	11 SUPER SHIELD 60%+-40%	1,63	7,11	8,71	10,29
B055	TIMES FIBER	RG11 QUADSHIELD	1,63	7,11	8,66	11,00
B055	TRILOGY	RG11 QUADSHIELD	1,63	7,11	8,71	10,85
B071	ALCATEL/KABELHEYDT	75S 1,1/7,3 CE	1,10	7,30	7,80	10,80
B071	ALCATEL/SENEFFOISE	11 S (TA) V-QS/P	1,10	7,25	8,70	10,90
B071	BEDEA	A-2YK2Y 1 x (1,1/7,3) KxLg	1,10	7,30	7,80	11,00
B071	BEDEA	A-2YK2Y 1 x (1,1/7,3) KxLg	1,10	7,30	7,80	11,00
B071	BEDEA	AB-2YKYD 1 x (1,1/7,3) KxLg	1,10	7,30	7,80	11,00
B071	BOSCH	GKP 7	1,20	7,30	7,80	11,00
B071	F & G	A-2YK2Y1Kx 1,1/7,3	1,10	7,30	7,80	11,00
B071	KABELMETAL	CAX 1,1/7,3 Cu	1,10	7,30	7,80	11,00
B071	SIEMENS CABLES	2YK2Y 1Kx 1,1/7,3	1,10	7,30	7,80	11,00
B092	SIEMENS CABLES	2YTK2Y 1,23/8,0	1,23	8,00	0,00	10,30
B092	SIEMENS CABLES	S43204-L-A	1,21	8,00	8,30	10,00
B093	SUHNER CABLES	SA 07273	1,57	7,25	7,80	10,00
B094	ALCATEL/SENEFFOISE	ACW11PTC.320	1,80	7,45	8,12	10,03
B094	COMMSCOPE	QR 320-JC/A/ASS/ACASS/AM109	1,80	7,47	8,15	10,03
B107	KABELMETAL	CAF 1,6/7,3 AL	1,60	7,30	8,50	10,50
B107	NOKIA	TELLU 7	1,70	7,30	8,20	11,00
B107	NOKIA	SM 7	1,70	7,30	8,20	11,00
B117	RAYDEX/CDT	CT125RBS	1,25	5,50	6,20	9,60
B118	BELDEN (POPE)	H43AL	1,66	7,15	7,80	10,80
B118	EUPEN	B4 707 RT8V	1,70	6,90	7,60	10,80
B118	PIRELLI CABLES	GE B4 272 30516	1,70	6,90	0,00	11,00
B118	RAYDEX/CDT	CT167RBS	1,67	7,28	7,98	11,50
D006	BEDEA	TELAAS 220 KU 75 ohm	2,20	10,20	10,80	12,80
D006	BEDEA	2,25/9,8 C-PE	2,25	9,80	10,60	12,60
D006	BELDEN (POPE)	H48	2,30	9,60	10,50	12,90
D006	BIEFFE	C-0-220/R CATV	2,20	9,60	10,50	12,50
D006	CAVEL	KF22AS/PE	2,20	9,90	10,60	12,70

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE

PPC type	Cable manufacture	Cable name	innercond	dielectric	outer cond.	sheath
D006	CAVEL	22/99 FC				
D015	ALCATEL/KABELRHEVDT	75D 2,2/8,8 CER+CBER+CTR	2,20	8,80	10,50	12,70
D015	ALCATEL/KABELRHEVDT	75D 2,2/8,8 CEF+CBEF	2,20	8,80	9,30	12,50
D015	BEDEA	A-2YOK2Y 1 x (2,2/8,8) KxLg	2,20	8,80	9,30	12,50
D015	BEDEA	L5	2,20	8,80	9,10	12,50
D015	BOSCH	BKP 4	2,20	8,80	9,30	12,50
D015	F & G	A-2YOK2Y1mKx 2,2/8,8	2,20	8,80	9,30	12,50
D015	KABELMETAL	L-CAW 2,1/8,3 CU	2,08	8,30	9,50	12,00
D015	KABELMETAL	CALC 2,2/8,8 CU	2,20	8,80	9,30	13,00
D015	KABELMETAL	CAW 1,8/8,3 CU	1,80	8,30	9,50	12,00
D015	NOKIA	NK22CN	2,20	8,80	9,50	12,70
D015	SIEMENS CABLES	2YHOK2Y 1 NKX 2,2/8,8	2,20	8,80	9,30	12,50
D020	ABB	06358 YEYEB 1,9/8,9 AL/PE	1,90	8,90	0,00	12,10
D026	ABB	84204 CATV 2,0/8,1 CU/PE	2,00	7,50	9,30	11,30
D026	ABB	02402 KTV D5 2,0/9,3 CU/PE	2,00	9,30	9,60	11,80
D026	ALCATEL	2/75 GCFP	2,00	8,10	9,10	11,50
D026	ALCATEL	2/75 GCFP	2,00	8,10	9,10	11,50
D026	ALCATEL	CA 511 J	2,00	8,25	9,30	11,40
D026	ALCATEL/KABELRHEVDT	75F 2,0/8,8 CE+CT	2,00	8,80	9,30	11,30
D026	ALCATEL/SENEFFOISE	CA 11 J	2,00	8,20	9,30	11,60
D026	ALCATEL/SENEFFOISE	CA 511 J/J2A/JM	2,00	8,20	9,30	11,50
D026	ALCATEL/SENEFFOISE	CA 310 J/J2A / JM	1,96	8,80	9,30	11,60
D026	ERICSSON	KTV 2,0/8,3 CV / CE / CEL	2,00	8,30	9,30	12,00
D026	EUPEN	B4 7088LD	2,00	8,30	9,30	11,30
D026	EUPEN	7081	1,75	8,20	9,30	11,30
D026	EUPEN	7091	1,96	8,75	9,30	11,30
D026	KABELMETAL	L-CAW 2,0/8,1 CU	2,00	7,50	9,30	11,30
D026	KABELMETAL	CAF 1,9/8,8 Cu	1,90	8,80	9,30	11,30
D032	RAYDEX/CDT	URM57RBS	1,15	7,25	8,15	11,50
D046	ALCATEL	5412J	2,28	9,20	10,60	12,30
D046	ALCATEL	B4 2,3/75 ACL	2,30	9,30	10,60	12,60
D046	ALCATEL	B4 1,9/75 ACL	2,10	9,30	10,60	12,60
D046	ALCATEL	B4 2,3/75 ACLE	2,28	9,20	10,50	12,50
D046	ALCATEL/KABELRHEVDT	75F 2,2/8,2 AER	2,24	9,20	0,00	0,00
D046	ALCATEL/SENEFFOISE	5412 J/JB/J2A/JM-ACE9PTC.412	2,28	9,30	10,50	12,80
D046	COMMSCOPE	P3-75-412-JC/A/ASS/ACASS/MT09	2,26	9,19	10,46	13,00
D046	EUPEN	7097LD - 3/8"	2,30	9,35	10,46	12,50
D046	F & G	2,0/9,3A	2,00	9,30	10,50	12,80
D046	TIMES FIBER	T10.412"	2,24	9,19	10,50	12,20

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE

PPC type	Cable manufacture	Cable name	innercond	dielectric	outer cond.	sheath
D049	DÄTWYLER	FD0412	2,40	9,20	10,50	13,30
D056	CORTAILLOD	HF75C 2,0/9,3 FLEX	2,00	9,10	9,90	12,50
D057	CORTAILLOD	HF75C 2,0/9,3 CIT	2,00	9,30	9,70	12,50
D069	DELTA	TR165UG/725MB	1,65	7,20	7,95	11,95
D069	RAYDEX/CDT	CT167PE/AB+RBS/AB	1,67	7,28	7,98	12,05
D074	DELTA	TR233/1000	2,33	10,05	10,80	12,90
D074	PIRELLI CABLES	Y1705+Y1617	2,33	10,00	11,00	13,00
D074	RAYDEX/CDT	CT233PE	2,33	10,06	10,80	13,00
D096	SUHNER CABLES	SA 09273	2,00	9,20	9,70	12,30
D134	RAYDEX/CDT	CTF200PE	2,00	8,70	10,15	11,75
E005	ABB	06318	1,80	11,50	11,80	15,00
E005	ALCATEL/KABELRHEVDT	75S 1,8/11,5 CE	1,80	11,50	12,00	15,40
E005	BEDEA	1,8/11,5	1,80	11,30	11,50	14,00
E005	BOSCH	CK 575 TS	1,80	11,50	11,70	14,80
E005	BOSCH	CK 575	1,80	11,50	11,70	14,80
E005	DÄTWYLER	FS-0596/01	1,75	11,60	0,00	14,50
E005	DÄTWYLER	FS-0596-U	1,75	11,60	0,00	14,50
E005	KABELMETAL	CAX 1,8/11,5 Cu	1,80	11,50	12,00	15,00
E005	KABELMETAL	CAD 1,8/11,6 Cu	1,80	11,50	11,90	14,80
E005	NKT	KJ 1706	1,75	11,50	11,80	14,80
E005	SIEMENS CABLES	S43207-L-A	1,75	11,60	11,90	15,10
E019	BELDEN (POPE)	H49AL	2,30	9,60	10,50	13,70
E019	BELDEN (POPE)	COAX 4 F14 SLIMLINE & FOAM	2,20	10,20	10,50	13,80
E019	BELDEN (POPE)	COAX 4 FB14 SLIMLINE & FOAM	2,20	10,20	11,00	13,80
E021	ABB	06347 YE/VEB 2,55/11,6 AL/PE	2,55	11,60	0,00	14,50
E029	ACOME	L2855/L2914	2,65	10,80	12,00	14,30
E029	ALCATEL	CA 514 J	2,65	10,85	12,00	14,30
E029	ALCATEL/KABELRHEVDT	75F 2,5/11,5 CE+CT	2,50	11,50	12,00	14,00
E029	ALCATEL/SENEFFOISE	CA 14 J / J2A / JM	2,69	11,10	12,30	14,30
E029	ALCATEL/SENEFFOISE	CA 514 J/J2A/JM	2,65	10,85	12,00	14,40
E029	EUPEN	A3 7118LD	2,65	11,20	12,00	14,40
E036	ACOME	L2906/L2907	2,65	11,20	0,00	14,30
E037	ACOME	L3759A/L3761A	2,80	11,60	0,00	16,00
E037	ACOME	L2362A	2,80	11,60	0,00	15,60
E037	ALCATEL	2,8/75 CCPE+	2,80	11,60	12,00	16,00
E037	PIRELLI CABLES	GE A3 272-34801,-30722	2,77	11,30	0,00	15,70
E045	BELDEN (POPE)	COAX 6 MASSIEF	1,75	11,50	12,00	15,10
E047	ALCATEL/KABELRHEVDT	75F 2,7/11,4 AER	2,70	11,40	12,70	14,70
E047	COMMSCOPE	P3-75-500-JC/A/ASS/ACASS/MT09	2,77	11,43	12,70	14,22

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE

PPC type	Cable manufacture	Cable name	innercond	dielectric	outer cond.	sheath
E047	TIMES FIBER	T10 500"	2,77	11,40	12,70	14,30
E061	CORTAILLOD	HF75C 2,65/11,5 ALU-T2T	2,65	11,20	12,80	15,80
E063	ABB	02403 KTV D4 2,5/11,6 CU/PE	2,55	11,60	11,90	14,50
E063	BEDEA	TELASS 240	2,40	11,50	12,20	15,00
E063	CAVEL	27/115 FC	2,70	11,50	12,30	15,00
E063	DELTA	TR264/1150	2,60	11,25	12,10	14,30
E063	KABELMETAL	CAF 2,5/11,4 Cu	2,50	11,40	12,20	14,20
E063	PIRELLI CABLES	Y1804+Y1815	2,60	11,50	12,60	15,00
E063	RAYDEX/CDT	CT264PE	2,60	11,40	12,10	14,50
E064	ALCATEL	A3 2,8/75 ACLE	2,77	11,50	12,70	14,70
E064	ALCATEL	A3 2,5/75 ACL	2,60	11,60	12,85	15,20
E064	ALCATEL	A3 2,8/75 ACL	2,82	11,60	12,85	15,20
E064	ALCATEL	5500J	2,77	11,50	12,70	14,80
E064	ALCATEL/SENEFFOISE	5500 J/JB/JB2A/JM-ACE/PTC.500	2,78	11,50	12,70	14,70
E064	EUPEN	7127LD - 1/2"	2,89	11,60	12,70	15,30
E064	F & G	2,5/11,5A	2,55	11,60	12,80	15,00
E064	KABELMETAL	CAF 2,5/11,4 AL	2,50	11,40	12,60	14,60
E075	DELTA	TR233/1000MB	2,33	10,05	10,80	14,90
E075	RAYDEX/CDT	CT233PE/AB+RBS/AB	2,33	10,06	10,80	14,90
E075	RAYDEX/CDT	CT233RBS	2,33	10,06	10,80	14,40
E084	ALCATEL/KABELRHEYDT	75D 2,7/10,4 AER 440"	2,70	10,40	11,40	13,80
E084	TRILOGY	.440" MC2	2,70	10,40	11,40	13,30
E091	ALCATEL/SENEFFOISE	ACW7PTC.470	2,75	11,35	12,04	14,20
E097	SUHNER CABLES	SA 12273	2,50	11,50	12,00	15,00
E109	HCF	HCF 1/2" CuZn 75 Ohm	2,11	8,50	12,20	15,00
E120	COMMSCOPE	F50TSEF	2,75	11,55	12,45	14,85
E120	COMMSCOPE	F50TSV	2,77	11,56	12,30	15,00
E120	TIMES FIBER	TX10-15	2,77	11,56	12,45	14,99
E128	NOKIA	MVAU 1,9/9,2 Alu	1,90	9,20	10,60	14,60
G003	ALCATEL/KABELRHEYDT	75D 3,3/13,5 CER+OBER+CTR	3,30	13,40	14,00	17,30
G003	BEDEA	A-2YOK2Y 1 x (3,3/13,5) KdLg	3,27	13,50	13,70	17,00
G003	BEDEA	L3	3,27	13,50	14,00	17,50
G003	BEDEA	L3 ARM.	3,40	13,80	14,00	17,60
G003	BOSCH	BKP 3	3,30	13,50	14,00	17,00
G003	F & G	A-2YOK2Y1qKx 3,3/13,5	3,27	13,50	14,00	17,00
G003	SIEMENS CABLES	2YHOK2Y 1 OKX 3,3/13,5	3,30	13,50	14,00	17,00
G009	ABB	84205 CATV 3,0/12,2 CU/PE	3,00	12,20	13,70	16,10
G009	ACOME	L2724/L2725	3,10	12,40	13,70	16,50
G009	ALCATEL	3/75 CCFP	3,10	11,60	13,80	16,50

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE

PPC type	Cable manufacture	Cable name	innercond	dielectric	outer cond.	sheath
G009	ALCATEL	CA 516 J	3,10	12,40	13,70	16,00
G009	ALCATEL	CA 516 J	3,10	12,40	13,70	16,00
G009	ALCATEL	3/75 CCFP	3,10	11,60	13,80	16,50
G009	ALCATEL/SENEFFOISE	CA 516 J/J2A/JM	3,10	12,40	13,70	16,00
G009	ALCATEL/SENEFFOISE	CA 315 J/J2A/JM	2,70	12,40	13,70	16,20
G009	CZECH	VRZE 75/12,2	2,70	12,20	13,70	16,00
G009	EUPEN	7121 - 1/2"	2,70	12,40	13,70	16,30
G009	EUPEN	A2 7128LD - 1/2"	3,10	12,40	13,70	16,30
G009	KABELMETAL	CAW 2,8/11,6 CU	2,80	11,60	13,70	16,00
G009	KABELMETAL	L-CAW 3,0/12,2 CU	3,00	11,60	13,70	16,10
G009	KABELMETAL	LCF 1/2" C12Y	3,10	11,60	13,70	16,00
G009	KABELMETAL	CF 1/2" CU 2Y	2,80	11,60	13,70	16,00
G012	BELDEN (POPE)	COAX 3 F 18 SLIMLINE & FOAM	3,40	14,90	15,30	18,00
G048	ALCATEL/KABELRHEVOT	75F 3,45/14,3 AER	3,45	14,30	15,90	17,70
G048	COMMSCOPE	P3-75-625-JC/A/ASS/ACASS/MT09	3,48	14,30	15,90	17,40
G048	TIMES FIBER	T10 .625"	3,45	14,30	15,90	17,90
G050	DÄTWYLER	FD0500	3,00	11,30	12,70	15,90
G052	ALCATEL/KABELRHEVOT	75F 3,15/13,0 AER	3,15	13,00	13,72	15,60
G052	ALCATEL/SENEFFOISE	ACW6PTC.540	3,15	13,03	13,72	15,72
G052	COMMSCOPE	QR540-JC/A/ASS/ACASS/AM109	3,15	13,03	13,72	15,49
G065	ALCATEL	5625J	3,45	14,30	15,90	18,30
G065	ALCATEL	A2 3,45/775 ACLE	3,45	14,30	15,90	18,30
G065	ALCATEL/SENEFFOISE	5625 J/JB/JB2A/JM-ACE6PTC.625	3,45	14,30	15,90	18,80
G078	DELTA	TR305/1300	3,05	13,10	14,00	16,40
G078	RAYDEX/CDT	CT305PE	3,05	13,10	13,80	16,30
G079	DELTA	TR305/1300MB	3,05	13,10	14,00	18,00
G079	RAYDEX/CDT	CT305PE/AB+RBS/AB	3,05	13,10	13,80	18,00
G079	RAYDEX/CDT	CT305RBS	3,05	13,10	13,80	17,70
G085	ALCATEL/KABELRHEVOT	75D 3,1/11,9 AER 500"	3,10	11,90	13,00	15,40
G085	TRILOGY	.500" MC2	3,10	11,90	13,00	15,40
G100	ACOME	L5696 A3	2,80	11,60	11,90	15,50
G100	DELTA	TR264/1150MB	2,60	11,25	12,10	16,10
G100	PIRELLI CABLES	Y1727	2,33	10,00	11,38	15,50
G100	RAYDEX/CDT	CT264PE/AB+RBS/AB	2,60	11,40	12,10	16,00
G100	RAYDEX/CDT	CT264RBS	2,60	11,40	12,10	15,80
G105	NOKIA	TELLU 5	2,80	11,80	13,10	16,50
G105	NOKIA	SM 5	2,80	11,80	13,10	16,50
G105	PIRELLI CABLES	Y1826	2,60	11,50	12,88	16,50
G121	TIMES FIBER	TX10 .565"	3,28	13,20	14,40	15,90

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE

PPC type	Cable manufacture	Cable name	innercond	dielectric	outer cond.	sheath
GT31	TRILOGY	RADIATING .500"	3,10	11,90	13,00	15,00
H008	ABB	84206 CATV 3,9/15,6 CU/PE	3,90	15,00	17,20	19,60
H008	ACOME	L2516/L2726	3,90	15,20	17,50	20,30
H008	ALCATEL	3,7/75 CCFP	3,90	15,60	17,20	20,20
H008	ALCATEL	CA 519 J	3,90	15,60	17,20	20,10
H008	ALCATEL/SENEFFOISE	CA 519 J/J2A/JM	3,90	15,60	17,20	20,10
H008	ALCATEL/SENEFFOISE	CA 19 J / J2A / JM	3,90	15,80	17,20	19,60
H008	ERICSSON	KTV 3,9/15,8 CV / CE / CEL	3,90	15,80	17,20	19,80
H008	EUPEN	A2+ 7168LD - 5/8"	3,90	16,00	17,40	20,00
H008	EUPEN	7168LDA	3,90	15,00	17,00	19,80
H008	KABELMETAL	L-CAW 3,9/15,6 CU	3,90	15,00	17,20	19,60
H010	BELDEN (POPE)	COAX 3 SAS	3,40	16,50	17,60	21,60
H011	BELDEN (POPE)	COAX 3 FB 20 SLIMLINE & FOAM	3,40	14,90	15,80	19,80
H024	ABB	02404 KTV D3 3,8/17,3 CU/PE	3,80	17,30	17,60	20,70
H024	ALCATEL/KABELRHEVOT	75F 3,6/16,7 CE+CT	3,60	16,70	17,30	21,30
H030/038	ACOME	L2358/L4957/L2359/L3840	3,30	13,30	15,00	18,00
H033	ALCATEL	3,5/75 CC	3,45	15,60	17,20	20,00
H033	ALCATEL/SENEFFOISE	CA 318 J/J2A/JM	3,45	15,60	17,20	20,20
H033	EUPEN	7161 - 5/8"	3,45	16,00	17,20	19,80
H033	KABELMETAL	CAW 3,5/15,6 CU	3,50	15,60	17,20	19,60
H038	ACOME	U2648/L3624/W1861	3,30	13,30	0,00	17,50
H038	ALCATEL	3,3/75 CCFE+	3,30	13,30	13,60	18,00
H038	PIRELLI CABLES	GE A2 272-30060-30515	3,30	13,30	0,00	18,00
H038	SAT CABLES	A2 SAT 3,3/13,5 - 3033	3,33	13,30	13,80	18,00
H053	ALCATEL/KABELRHEVOT	75F 4,22/17,4 AER	4,22	17,40	18,20	20,00
H053	ALCATEL/SENEFFOISE	ACW9PTC.7/15	4,22	17,40	18,16	19,94
H053	COMMSCOPE	QR715-JC/A/ASS/ACASS/AM188	4,22	17,42	18,16	19,94
H058	CORTAILLOD	HF75C 3,2/15,0 CLT	3,20	15,00	15,40	18,40
H073	ACOME	T3198 A2	3,30	13,30	0,00	18,00
H073	ALCATEL/KABELRHEVOT	75D 3,3/13,5 CEF+CBF	3,30	13,40	13,90	18,00
H073	NKF	BAMBOO 3 - +/- ARMURED	3,30	13,50	14,20	18,00
H073	NKF	BAMBOO 3 DBD	3,30	13,50	14,20	18,00
H073	SAT CABLES	A3 SAT STD.	3,30	13,50	14,00	18,00
H073	SIEMENS CABLES	2YHOTK2Y 3,3/13,5	3,30	13,50	14,00	18,00
H081	ABB	06330	2,62	17,30	17,70	21,00
H081	ALCATEL/KABELRHEVOT	75S 2,7/17,3 CE	2,70	17,30	17,60	21,20
H081	BEDEA	2,6/17,3	2,65	17,30	17,50	20,20
H081	DÄTWYLER	FS-0582 (4dB)	2,60	17,30	17,50	21,00
H081	KABELMETAL	CAD 2,6/17,3 Cu	2,70	17,30	17,70	21,20

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE

PPC type	Cable manufacture	Cable name	innercond	dielectric	outer cond.	sheath
H081	NKT	KJ 2604 / KJA 2604	2,60	17,30	17,40	21,40
H086	ALCATEL/KABELRHEYDT	75D 4,0/18,0 AER 650"	4,00	15,10	16,30	18,50
H086	TRILOGY	.650" MC2	4,00	15,10	16,30	18,50
H098	SUHNER CABLES	SA 17273	3,80	17,30	17,80	21,40
H122	TIMES FIBER	TX10 .700"	4,14	16,60	17,90	19,80
M002	ALCATEL/KABELRHEYDT	75D 4,9/19,4 CER+CBER+CTR	4,88	19,30	20,00	24,90
M002	ALCATEL/KABELRHEYDT	7519D-LK38 CCF/T PE/THP FIROX	4,90	19,40	20,30	24,30
M002	F & G	1-2YOK2Y1skx 4,9/19,4	4,90	19,40	20,00	24,50
M002	SAT CABLES	A1 SAT 4,9/19,4	4,90	19,43	20,00	25,00
M017	ALCATEL/KABELRHEYDT	75D 4,9/19,4 CEF+CBEF	4,88	19,30	19,80	23,20
M017	BEDEA	L2	4,90	19,30	19,60	22,50
M022	ABB	06360 YE/YEB 3,8/17,3 AL/PE	3,80	17,30	0,00	20,70
M041	CZECH	HF 75/16D	3,80	0,00	16,40	22,10
M054	ALCATEL/KABELRHEYDT	75F 5,16/21,0 AER	5,16	21,00	0,00	0,00
M054	ALCATEL/SENEFFOISE	ACW4PTC-860	5,16	21,03	21,84	24,24
M054	COMMSCOPE	QR860-JCA/JCASS/JACASS/AM188	5,16	21,03	21,84	24,38
M059	CORTALLOD	HF75C 4,3/20,4 CIT	4,30	20,40	20,80	24,80
M062	CORTALLOD	HF75C 4,2/17,6 ALU T2T	4,20	17,60	19,40	23,10
M066	ALCATEL	5750J	4,26	17,30	19,10	21,50
M066	ALCATEL	A2 3,7/75 ACL	3,92	17,30	19,10	21,70
M066	ALCATEL	A2 4,2/75 ACL	4,20	17,30	19,10	21,70
M066	ALCATEL	A2 4,2/75 ACLE	4,26	17,30	19,10	21,50
M066	ALCATEL/KABELRHEYDT	75F 4,19/17,2 AER	4,19	17,20	19,10	21,20
M066	ALCATEL/SENEFFOISE	5750 J/JB/JB2A/JM-ACE5PTC.750	4,26	17,30	19,10	22,00
M066	COMMSCOPE	P3-75-750-JC/A/ASS/JACASS/M109	4,24	17,22	19,05	20,83
M066	EUPEN	7171LD - 3/4"	4,27	17,30	19,05	21,60
M066	KABELMETAL	CAF 3,7/17,3 AL	3,80	17,30	18,90	21,50
M066	TIMES FIBER	T10 .750"	4,22	17,20	19,10	20,80
M067	ALCATEL	A2 4,93/75 ACLE	4,93	20,20	22,20	24,70
M067	ALCATEL/KABELRHEYDT	75F 4,9/20,2 AER	4,90	20,20	22,20	24,30
M067	ALCATEL/SENEFFOISE	5875 J/JB/JB2A/JM-ACE4,5PTC.875	4,93	20,20	22,20	25,20
M067	COMMSCOPE	P3-75-875-JC/A/ASS/JACASS/M250	4,93	20,24	22,23	24,00
M067	TIMES FIBER	T10 .875"	4,93	20,20	22,20	24,50
M072	DÄTWYLER	FD0750	4,50	16,50	19,10	22,30
M080	DELTA	TR410UG/1800MB	4,10	18,00	18,50	22,30
M087	ALCATEL/KABELRHEYDT	75D 4,8/18,0 AER 750"	4,80	18,00	19,30	21,70
M087	TRILOGY	.750" MC2	4,80	18,10	19,30	21,60
M089	ALCATEL/KABELRHEYDT	75S 2,9/19,4 CE	2,90	19,40	20,10	23,00
M089	KABELMETAL	CAX 2,9/19,4 Cu	2,93	19,40	20,00	23,00

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

CABLE DATA

CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE



PPC type	Cable manufacture	Cable name	innercond	dielectric	outer cond.	sheath
M103	EUPEN	778LD	4,30	17,00	19,00	22,20
M103	NOKIA	TELLU 3	4,20	17,60	19,10	23,10
M103	NOKIA	SM 3	4,20	17,60	19,10	23,10
M123	TIMES FIBER	TX10 .840"	4,93	19,80	21,30	23,80
M129	NOKIA	MVAU 3,7/17,3 Alu	3,70	17,30	19,10	23,40
M132	TRILOGY	RADIATING .750"	4,70	18,10	19,30	21,30
R001	ALCATEL/KABELRHEYDT	7523D-LK38 CCF/T PE/THP FIROX	6,00	23,20	24,10	28,10
R001	ALCATEL/KABELRHEYDT	750 6,0/23,2 CCF+CBF	6,00	23,30	23,80	28,80
R001	ALCATEL/KABELRHEYDT	750 6,0/23,2 CER+CBF+CTR	6,00	23,30	24,50	29,20
R001	SAT CABLES	A1 SAT 6/23,3	6,00	23,30	23,90	29,00
R007	ACOME	A1 L2043/L3623/L2357	5,70	22,70	25,40	28,00
R007	ALCATEL	CA 529 J	5,70	23,50	25,00	28,30
R007	ALCATEL	5,7/75 CCFP	5,70	23,00	25,40	28,00
R007	ALCATEL/SENEFFOISE	CA 529 J/J2A	5,70	23,10	25,40	28,30
R007	EUPEN	A1 728LD - 7/8"	5,70	23,50	25,00	28,00
R007	EUPEN	A1 728LD - 7/8"	5,80	23,50	25,20	27,90
R007	KABELMETAL	LCF 7/8" CU 2Y	5,70	22,00	24,90	28,00
R007	KABELMETAL	L-CAW 5,7/22,8 CU	5,70	22,00	24,90	27,30
R007	NOKIA	TELLU SUPERTRUNK	5,70	23,50	25,00	28,40
R007	NOKIA	SM SUPERTRUNK	5,70	23,50	25,00	28,40
R018	CORTALLOD	HF75C 5,7/23,5 ALU T2T	5,70	23,50	25,70	29,00
R044	BELDEN (POPE)	COAX 3 MASSIEF	3,65	23,80	24,50	29,00
R051	COMMSCOPE	P3-75-1000-JC/A/ASS/ACASS	5,59	22,61	25,40	27,43
R051	TIMES FIBER	T10 1000"	5,59	22,60	25,40	27,70
R060	CORTALLOD	HF75C 5,2/24,6 CIT	5,20	24,60	25,00	28,90
R068	ALCATEL	A2 5,59/75 ACLE	5,50	22,60	25,40	28,50
R068	ALCATEL	51000J	5,59	22,60	25,40	28,50
R068	ALCATEL/SENEFFOISE	51000J/JB/JB2A	5,59	22,60	25,40	29,00
R077	DÄTWYLER	FD1000	6,00	22,50	25,40	28,60
R082	ABB	06332	3,65	24,00	24,30	28,20
R082	ALCATEL/KABELRHEYDT	75S 3,65/23,6 CE	3,65	23,60	24,40	28,20
R082	BEDEA	3,65/23,8	3,65	23,50	23,80	27,00
R082	DÄTWYLER	FS-0597 (3dB)	3,65	23,70	23,90	28,25
R082	NKT	KJ 3606 / KJA 3606	3,62	23,80	24,10	28,30
R082	SIEMENS CABLES	S43209-L-A	3,65	23,90	24,20	28,50
R083	ALCATEL	5/75 CC	5,30	23,00	25,40	28,00
R083	ALCATEL/SENEFFOISE	CA 328 J/J2A	5,10	23,50	25,00	28,40
R083	CZECH	VRCZE 75 22,8	5,00	22,20	25,30	28,60
R083	EUPEN	7221 - 7/8"	5,10	23,50	25,00	28,00

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE

PPC type	Cable manufacture	Cable name	innercond	dielectric	outer cond.	sheath
R083	KABELMETAL	CAW 52/22.0 CU	5.20	22.00	24.90	28.00
R083	KABELMETAL	CF 7/8" CU 2Y	5.20	22.00	24.90	28.00
R088	ALCATEL/KABELHEVDT	75D 6.3/24.4 AER 1000"	6.30	24.40	25.80	28.20
R088	TRILOGY	1000" MC2	6.30	24.40	25.80	28.20
R099	SUHNER CABLES	SA 24273	5.10	23.70	24.20	28.20
R130	TRILOGY	RADIATING .1000"	6.30	24.50	25.80	27.80
RG11/12	ABB	06414 M17/006 RG11	1.20	7.24	0.00	10.30
RG11/12	ABB	06415 M17/006 RG12	1.20	7.24	0.00	10.30
RG11/12	BEDEA	M17/6 - RG12	1.20	7.24	0.00	10.30
RG11/12	BEDEA	M17/6 - RG11	1.20	7.24	0.00	10.30
RG11/12	BELDEN (POPE)	M17/16 RG11 A/U	1.20	7.25	0.00	10.30
RG11/12	BIEFFE	RG11/U	1.20	7.24	0.00	10.30
RG11/12	CAVEL	RG 11/U	1.20	7.24	0.00	10.30
RG11/12	EUPEN	RG/U 11A	1.20	7.25	8.00	10.30
RG11/12	EUPEN	RG/U 12A	7.04	7.25	8.00	10.30
RG11/12	FMC CABLES	RG12/U	1.20	7.20	8.00	10.30
RG11/12	FMC CABLES	RG11/U	1.20	7.20	8.00	10.30
RG11/12	NKT	M17/6 RG11 A/U	1.20	7.25	8.15	10.30
RG11/12	NOKIA	RG11	1.20	7.25	8.00	10.30
RG11/12	SUHNER CABLES	RG11/U	1.20	7.25	8.10	10.30
RG164/35	BEDEA	M17/64 - RG164	2.65	17.27	0.00	22.10
RG164/35	BEDEA	M17/64 - RG35	2.65	17.27	0.00	22.10
RG164/35	EUPEN	RG/U 164	2.65	17.30	0.00	22.10
RG164/35	EUPEN	RG/U 35B	2.65	17.30	0.00	22.10
RG164/35	FMC CABLES	RG35/U	2.65	17.30	0.00	22.10
RG164/35	FMC CABLES	RG164/U	2.65	17.30	0.00	22.10
RG164/35	NOKIA	RG164	2.65	17.30	0.00	22.10
RG216	BEDEA	M17/77 - RG216	1.20	7.24	0.00	10.80
RG216	BELDEN (POPE)	M17/77 RG216 U	1.20	7.25	0.00	10.80
RG216	EUPEN	RG/U 216	1.20	7.25	0.00	10.80
RG216	FMC CABLES	RG216	1.20	7.24	8.70	10.80
RG216	NOKIA	RG216	1.20	7.25	8.80	10.80
RG216	SUHNER CABLES	RG216	1.20	7.25	8.70	10.80
RG59	ABB	06435 M17/029 RG59	0.57	3.70	0.00	6.15
RG59	BEDEA	M17/29 - RG59	0.58	3.71	0.00	6.15
RG59	BELDEN (POPE)	M17/29 RG59 B/U	0.58	3.70	0.00	6.15
RG59	BIEFFE	RG59 B/U	0.58	3.71	0.00	6.15
RG59	CAVEL	RG 59 B/U	0.58	3.71	0.00	6.15
RG59	EUPEN	RG/U 59	0.58	3.70	0.00	6.15

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE

PPC type	Cable manufacture	Cable name	innercond	dielelectric	outer cond.	sheath
RG59	FMC CABLES	RG59B/U	0.58	3.70	0.00	6.20
RG59	NKT	M17/29 RG59B/U	0.58	3.70	4.50	6.10
RG59	NOKIA	RG59	0.58	3.70	0.00	6.20
RG59	SUHNER CABLES	GX04273	0.63	3.70	4.40	6.10
RG59	SUHNER CABLES	G 04233-XX + G 04273-XX	0.58	3.70	4.40	6.10
RG59	SUHNER CABLES	RG59	0.58	3.70	4.40	6.10
RG6	EUPEN	RG/U 6A	0.72	4.70	0.00	8.40
RG6	FMC CABLES	RG6/U	0.72	4.80	0.00	8.50
S016	ALCATEL/KABELRHEVDT	75D 73/28.9 CER+CZER	7.30	28.80	29.40	33.60
S016	ALCATEL/KABELRHEVDT	7529D-LK38 CCF/T PE/THP FIROX	7.30	28.90	29.80	34.00
S016	ALCATEL/KABELRHEVDT	75D 73/28.9 CEF+CZBEF	7.30	28.80	29.40	33.60
S016	BEDEA	L1.5	7.25	28.90	29.30	33.30
S016	NKF	BAMBOO 1.5 - +/- ARMoured	7.25	28.90	29.30	33.90
S016	NKF	BAMBOO 1.5 DBD	7.25	28.90	29.30	33.00
S095	COMMSCOPE	QR1125-JC/A/ASS/ACASS	6.68	27.46	28.58	31.12
S124	TIMES FIBER	TX10 1160"	6.83	27.00	29.50	32.00
upon req.	ABB	02512 SAT 1 0.7/3.2 AL/PVC	0.70	3.20	3.80	5.10
upon req.	ABB	02511 SAT 3 0.7/3.2 AL/PVC	0.70	3.20	3.80	5.10
upon req.	ABB	02509 PTH PLUS 0.7/3.2 AL/PE	0.70	3.20	3.80	5.10
upon req.	ACOME	W2117/W2118/L3658/L3659	0.80	5.20	0.00	7.70
upon req.	ALCATEL	8/75 CC	8.00	33.00	36.00	39.00
upon req.	ALCATEL	3.9/75 CCE+	3.90	16.10	16.50	21.00
upon req.	ALCATEL/KABELRHEVDT	75D 4.9/19.4 AER+ATR	4.88	19.30	21.00	24.20
upon req.	ALCATEL/KABELRHEVDT	75D 3.3/13.5 AER+ATR	3.30	13.40	14.70	17.90
upon req.	ALCATEL/KABELRHEVDT	75D 2.2/6.8 AER+ATR	2.20	8.80	10.00	13.20
upon req.	ALCATEL/KABELRHEVDT	75D 1.7/7.0 AER+ATR	1.70	6.90	8.10	11.20
upon req.	BEDEA	TELESS 40	0.40	2.00	2.70	3.60
upon req.	BEDEA	TELESS 50	0.45	2.20	2.90	3.65
upon req.	BEDEA	TELESS 70	0.65	3.00	3.60	4.30
upon req.	BEDEA	FLEX 0.5Lz/3.0z	0.50	3.00	3.60	5.00
upon req.	BELDEN (POPE)	H 122	0.40	2.00	2.60	3.70
upon req.	BELDEN (POPE)	H 123	0.65	2.90	3.40	4.20
upon req.	BELDEN (POPE)	H 121 CU/AL	0.80	3.50	3.90	5.00
upon req.	BOSCH	CKF 22	0.41	2.00	2.80	3.60
upon req.	CAVEL	7510	0.75	3.60	4.00	5.00
upon req.	CORTAILLOD	HF75C 9.1/38.0 ALU T2T	9.10	38.00	40.80	45.00
upon req.	CORTAILLOD	HFL75C 15/8" CU2Y	9.10	38.00	38.50	43.00
upon req.	DELTA	TR680UG/2900MB	6.80	29.00	29.50	33.50
upon req.	DATWYLER	FS-1160	2.50	11.60	12.30	14.80

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CONNECTOR TYPE

[illegible]

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CABLE MANUFACTURE

Cable manufacture	Cable name	innercond	dielectric outer cond.	sheath	PPC type
ABB	02510 SAT 1 PLUS 0,75/4,8 AL/PE	0,75	4,80	5,25	6,80
ABB	02506 SAT 2 0,75/4,8 AL/PE	0,75	4,80	5,25	6,80
ABB	06371 compact ktv 0,7/4,8H	0,75	4,80	5,50	6,80
ABB	06314 SOLID KTV 0,75	0,75	4,80	5,50	6,90
ABB	06302 NETFLEX KTV 1,0/4,8 CV	1,05	4,80	5,50	6,80
ABB	02395 NETFLEX KTV 1,0/4,8 PE	1,05	4,80	5,50	6,90
ABB	06365 SUPER KTV 0,8/3,6	0,80	3,60	4,40	5,60
ABB	06327 STARFLEX KTV 1,6/7,3 CEL	1,55	7,30	7,85	10,30
ABB	06301 STARFLEX KTV 1,6/7,3 CE	1,55	7,30	7,85	10,30
ABB	06369 STARFLEX KTV 1,6/7,3 CV	1,55	7,30	7,85	10,30
ABB	02401 KTV D8 1,6/7,3 CU/PE	1,55	7,30	7,60	9,50
ABB	06392 STARFLEX KTV 1,6/7,3 PE	1,55	7,30	7,85	10,30
ABB	06358 YE/YEB 1,9/8,9 AL/PE	1,90	8,90	0,00	12,10
ABB	84204 CATV 2,0/8,1 CU/PE	2,00	7,50	9,30	11,30
ABB	02402 KTV D5 2,0/9,3 CU/PE	2,00	9,30	9,60	11,80
ABB	06318	1,80	11,50	11,80	15,00
ABB	06347 YE/YEB 2,55/11,6 AL/PE	2,55	11,60	0,00	14,50
ABB	02403 KTV D4 2,5/11,6 CU/PE	2,55	11,60	11,90	14,50
ABB	84205 CATV 3,0/12,2 CU/PE	3,00	12,20	13,70	16,10
ABB	84206 CATV 3,9/15,6 CU/PE	3,90	15,00	17,20	19,60
ABB	02404 KTV D3 3,8/17,3 CU/PE	3,80	17,30	17,60	20,70
ABB	06330	2,62	17,30	17,70	21,00
ABB	06360 YE/YEB 3,8/17,3 AL/PE	3,80	17,30	0,00	20,70
ABB	02512 SAT 1 0,7/3,2 AL/PVC	0,70	3,20	3,80	5,10
ABB	02511 SAT 3 0,7/3,2 AL/PVC	0,70	3,20	3,80	5,10
ABB	02509 PTH PLUS 0,7/3,2 AL/PE	0,70	3,20	3,80	5,10
ABB	06332	3,65	24,00	24,30	28,20
ABB	06414 M17/006 RG11	1,20	7,24	0,00	10,30
ABB	06415 M17/006 RG12	1,20	7,24	0,00	10,30
ABB	06435 M17/029 RG59	0,57	3,70	0,00	6,15
ACOME	T1724 C6	0,75	4,70	5,30	7,00
ACOME	W1680 C6	1,15	5,20	6,10	8,00
ACOME	T3068/L3629/T3197	0,80	3,70	4,30	5,60
ACOME	U2455/U2457/L3008/L3764	1,70	6,90	7,70	10,70
ACOME	L2364/L4958/L2365/L3341	1,70	6,90	8,40	11,00
ACOME	L3762A/L3763A	1,70	6,90	0,00	10,70
ACOME	W2119/W2120	1,00	6,60	0,00	9,30
ACOME	L2855/L2914	2,65	10,80	12,00	14,30
ACOME	L2906/L2907	2,65	11,20	0,00	14,30

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

CABLE DATA



CABLE/CONNECTOR GUIDE SORTED BY CABLE MANUFACTURE

Cable manufacture	Cable name	innercond	dielectric outer cond.	sheath	PPC type
ACOME	L3759A/L3761A	2,80	11,60	0,00	E037
ACOME	L2362A	2,80	11,60	0,00	E037
ACOME	L2724/L2725	3,10	12,40	13,70	G009
ACOME	L5696 A3	2,80	11,60	11,90	G100
ACOME	L2516/L2726	3,90	15,20	17,50	H008
ACOME	L2358/L4957/L2359/L3840	3,30	13,30	15,00	H030/038
ACOME	U2648/L3624/W1861	3,30	13,30	0,00	H038
ACOME	T3198 A2	3,30	13,30	0,00	H073
ACOME	W2177/W2181/L3658/L3659	0,80	5,20	0,00	upon req.
ACOME	A1 L2043/L3623/L2357	5,70	22,70	25,40	R007
ALCATEL	25 VRM/PRM	0,75	4,70	5,30	A025
ALCATEL	311 C	1,08	4,75	5,45	A025
ALCATEL	TV 6 CW	1,02	4,57	5,20	A025
ALCATEL	222P	0,80	4,75	5,45	A025
ALCATEL	21 VAICA/PAICA	1,02	4,60	5,40	A025
ALCATEL	23 VRM/PRM	0,80	5,20	5,90	A031
ALCATEL	322P	0,90	5,40	5,95	A031
ALCATEL	25 VAICA/PAICA	0,81	3,70	4,50	A043
ALCATEL	24 VRIC/PRIC	0,80	3,70	4,20	A043
ALCATEL	TV 59 CW	0,81	3,70	4,30	A043
ALCATEL	TV 11 CW	1,63	7,30	8,00	B004
ALCATEL	14 VAICA/PAICA	1,63	7,30	8,10	B004
ALCATEL	11 VRIC	1,70	6,90	7,80	B004
ALCATEL	1,775 CCFP	1,70	6,90	8,70	B028
ALCATEL	1,775 CCPE+	1,70	6,90	7,40	B034
ALCATEL	C2 VRM/PRM	1,00	6,70	7,50	B039
ALCATEL	2/75 CCFP	2,00	8,10	9,10	D026
ALCATEL	2/75 CCFP	2,00	8,10	9,10	D026
ALCATEL	CA 511 J	2,00	8,25	9,30	D026
ALCATEL	5412J	2,28	9,20	10,60	D046
ALCATEL	B4 2,3/75 ACL	2,30	9,30	10,60	D046
ALCATEL	B4 1,9/75 ACL	2,10	9,30	10,60	D046
ALCATEL	B4 2,3/75 ACLE	2,28	9,20	10,50	D046
ALCATEL	CA 514 J	2,65	10,85	12,00	E029
ALCATEL	2,8/75 CCPE+	2,80	11,60	12,00	E037
ALCATEL	A3 2,8/75 ACLE	2,77	11,50	12,70	E064
ALCATEL	A3 2,5/75 ACL	2,60	11,60	12,85	E064
ALCATEL	A3 2,8/75 ACL	2,82	11,60	12,85	E064
ALCATEL	5500J	2,77	11,50	12,70	E064

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CABLE MANUFACTURE

Cable manufacture	Cable name	innercond	dielectric outer cond.	sheath	PPC type
ALCATEL	3/75 CCFP	3,10	11,60	13,80	G009
ALCATEL	CA 516 J	3,10	12,40	13,70	G009
ALCATEL	CA 516 J	3,10	12,40	13,70	G009
ALCATEL	3/75 CCFP	3,10	11,60	13,80	G009
ALCATEL	5625J	3,45	14,30	15,90	G065
ALCATEL	A2 3,45/75 ACLE	3,45	14,30	15,90	G065
ALCATEL	3,775 CCFP	3,90	15,60	17,20	H008
ALCATEL	CA 519 J	3,90	15,60	17,20	H008
ALCATEL	3,5/75 CC	3,45	15,60	17,20	H033
ALCATEL	3,3/75 CCPE+	3,30	13,30	13,60	H038
ALCATEL	5750J	4,26	17,30	19,10	M066
ALCATEL	A2 3,775 ACL	3,92	17,30	19,10	M066
ALCATEL	A2 4,2/75 ACL	4,20	17,30	19,10	M066
ALCATEL	A2 4,2/75 ACLE	4,26	17,30	19,10	M066
ALCATEL	A2 4,93/75 ACLE	4,93	20,20	22,20	M067
ALCATEL	8/75 CC	8,00	33,00	36,00	upon req.
ALCATEL	3,9/75 CCPE+	3,90	16,10	16,50	upon req.
ALCATEL	CA 529 J	5,70	23,50	25,00	R007
ALCATEL	5,7/75 CCFP	5,70	23,00	25,40	R007
ALCATEL	A2 5,59/75 ACLE	5,50	22,60	25,40	R068
ALCATEL	51000J	5,59	22,60	25,40	R068
ALCATEL	5/75 CC	5,30	23,00	25,40	R083
ALCATEL/KABELRHEVDT	75F 1,0/4,5 AIF	1,00	4,45	5,15	A025
ALCATEL/KABELRHEVDT	75F 1,1/5,2 AIF	1,10	5,20	6,10	A031
ALCATEL/KABELRHEVDT	75F 0,8/3,7 AIF	0,80	3,70	4,60	A043
ALCATEL/KABELRHEVDT	75F 1,6/7,3 CE+CT	1,60	7,30	7,80	B004
ALCATEL/KABELRHEVDT	75F 1,6/7,3 AIF	1,60	7,30	8,20	B004
ALCATEL/KABELRHEVDT	75D 1,7/7,0 CEF+CBEF	1,70	6,90	7,20	B014
ALCATEL/KABELRHEVDT	75D 1,7/7,0 CER	1,70	6,90	7,40	B014
ALCATEL/KABELRHEVDT	75S 1,1/7,3 CE	1,10	7,30	7,80	B071
ALCATEL/KABELRHEVDT	75D 2,2/8,8 CER+CBER+CTR	2,20	8,80	9,30	D015
ALCATEL/KABELRHEVDT	75D 2,2/8,8 CEF+CBEF	2,20	8,80	9,20	D015
ALCATEL/KABELRHEVDT	75F 2,0/8,8 CE+CT	2,00	8,80	9,30	D026
ALCATEL/KABELRHEVDT	75F 2,24/9,2 AER	2,24	9,20	0,00	D046
ALCATEL/KABELRHEVDT	75S 1,8/11,5 CE	1,80	11,50	12,00	E005
ALCATEL/KABELRHEVDT	75F 2,5/11,5 CE+CT	2,50	11,50	12,00	E029
ALCATEL/KABELRHEVDT	75F 2,7/11,4 AER	2,70	11,40	12,70	E047
ALCATEL/KABELRHEVDT	75D 2,7/10,4 AER 440"	2,70	10,40	11,40	E084
ALCATEL/KABELRHEVDT	75D 3,3/13,5 CER+CBER+CTR	3,30	13,40	14,00	G003

PPC Denmark

Værkstedstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CABLE MANUFACTURE

Cable manufacture	Cable name	innercond	dielectric outer cond.	sheath	PPC type
ALCATEL/KABELRHEVDT	75F 3,45/14,3 AER	3,45	14,30	15,90	G048
ALCATEL/KABELRHEVDT	75F 3,15/13,0 AER	3,15	13,00	13,72	G052
ALCATEL/KABELRHEVDT	75D 3,1/11,9 AER 500"	3,10	11,90	13,00	G085
ALCATEL/KABELRHEVDT	75F 3,6/16,7 CE+CT	3,60	16,70	17,30	H024
ALCATEL/KABELRHEVDT	75F 4,22/17,4 AER	4,22	17,40	18,20	H053
ALCATEL/KABELRHEVDT	75D 3,3/13,5 CEF+CBEF	3,30	13,40	13,90	H073
ALCATEL/KABELRHEVDT	75S 2,7/17,3 CE	2,70	17,30	17,60	H081
ALCATEL/KABELRHEVDT	75D 4,0/18,0 AER 650"	4,00	15,10	16,30	H086
ALCATEL/KABELRHEVDT	75D 4,9/19,4 CER+CBER+CTR	4,88	19,30	20,00	M002
ALCATEL/KABELRHEVDT	7519D-LK38 CCF/T PE/THP FIROX	4,90	19,40	20,30	M002
ALCATEL/KABELRHEVDT	75D 4,9/19,4 CEF+CBEF	4,88	19,30	19,80	M017
ALCATEL/KABELRHEVDT	75F 5,16/21,0 AER	5,16	21,00	0,00	M054
ALCATEL/KABELRHEVDT	75F 4,19/17,2 AER	4,19	17,20	19,10	M066
ALCATEL/KABELRHEVDT	75F 4,9/20,2 AER	4,90	20,20	22,20	M067
ALCATEL/KABELRHEVDT	75D 4,8/18,0 AER 750"	4,80	18,00	19,30	M087
ALCATEL/KABELRHEVDT	75S 2,9/19,4 CE	2,90	19,40	20,10	M089
ALCATEL/KABELRHEVDT	75D 4,9/19,4 AER+ATR	4,88	19,30	21,00	upon req.
ALCATEL/KABELRHEVDT	75D 3,3/13,5 AER+ATR	3,30	13,40	14,70	upon req.
ALCATEL/KABELRHEVDT	75D 2,2/8,8 AER+ATR	2,20	8,80	10,00	upon req.
ALCATEL/KABELRHEVDT	75D 1,7/7,0 AER+ATR	1,70	6,90	8,10	upon req.
ALCATEL/KABELRHEVDT	7523D-LK38 CCF/T PE/THP FIROX	6,00	23,20	24,10	R001
ALCATEL/KABELRHEVDT	75D 6,0/23,2 CEF+CBEF	6,00	23,30	23,80	R001
ALCATEL/KABELRHEVDT	75D 6,0/23,2 CER+CBER+CTR	6,00	23,30	24,50	R001
ALCATEL/KABELRHEVDT	75S 3,65/23,6 CE	3,65	23,60	24,40	R082
ALCATEL/KABELRHEVDT	75D 6,3/24,4 AER 1000"	6,30	24,40	25,80	R088
ALCATEL/KABELRHEVDT	75D 7,3/28,9 CER+CZER	7,30	28,80	29,40	S016
ALCATEL/KABELRHEVDT	7529D-LK38 CCF/T PE/THP FIROX	7,30	28,90	29,60	S016
ALCATEL/KABELRHEVDT	75D 7,3/28,9 CEF+CBEF	7,30	28,80	29,40	S016
ALCATEL/SENEFFOISE	6 S (TA) V/P BP VP/PM	0,72	4,65	5,40	A025
ALCATEL/SENEFFOISE	59 F (TA) V-QF/P	0,81	3,65	5,30	A025
ALCATEL/SENEFFOISE	59 S (TA) V-QS/P	0,58	3,65	5,30	A025
ALCATEL/SENEFFOISE	6 F (TA) V/P BP VP/PM	1,02	4,65	5,40	A025
ALCATEL/SENEFFOISE	6 F (TA) V-QF/P	1,02	4,65	6,30	A031
ALCATEL/SENEFFOISE	6 S (TA) V-QS/P	0,72	4,65	6,30	A031
ALCATEL/SENEFFOISE	59 F (TA) V/P BP VP/PM	0,81	3,65	4,40	A043
ALCATEL/SENEFFOISE	59 S (TA) V/P BP VP/PM	0,58	3,65	4,40	A043
ALCATEL/SENEFFOISE	11 F (TA) V/P BP VP/PM	1,63	7,25	8,00	B004
ALCATEL/SENEFFOISE	11 S (TA) V/P BP VP/PM	1,10	7,25	8,00	B039
ALCATEL/SENEFFOISE	11 F (TA) V-QF/P	1,63	7,25	8,90	B055

PPC Denmark

Værkstedstvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CABLE MANUFACTURE

Cable manufacture	Cable name	innercond	dielectric outer cond.	sheath	PPC type
ALCATEL/SENEFFOISE	TI S (TA) V-QS/P	1,10	7,25	8,70	B071
ALCATEL/SENEFFOISE	ACW11PTC.320	1,80	7,45	8,12	B094
ALCATEL/SENEFFOISE	CA 11 J	2,00	8,20	9,30	D026
ALCATEL/SENEFFOISE	CA 511 J/J2A/JM	2,00	8,20	9,30	D026
ALCATEL/SENEFFOISE	CA 310 J/J2A / JM	1,96	8,80	9,30	D026
ALCATEL/SENEFFOISE	5412 J/JB/JB2A/JM-ACE8PTC.412	2,28	9,30	10,50	D046
ALCATEL/SENEFFOISE	CA 14 J / J2A / JM	2,69	11,10	12,30	E029
ALCATEL/SENEFFOISE	CA 514 J/J2A/JM	2,65	10,85	12,00	E029
ALCATEL/SENEFFOISE	5500 J/JB/JB2A/JM-ACE7PTC.500	2,78	11,50	12,70	E064
ALCATEL/SENEFFOISE	ACW7PTC.470	2,75	11,35	12,04	E091
ALCATEL/SENEFFOISE	CA 516 J/J2A/JM	3,10	12,40	13,70	G009
ALCATEL/SENEFFOISE	CA 315 J/J2A/JM	2,70	12,40	13,70	G009
ALCATEL/SENEFFOISE	ACW6PTC.540	3,15	13,03	13,72	G052
ALCATEL/SENEFFOISE	5625 J/JB/JB2A/JM-ACE6PTC.625	3,45	14,30	15,90	G065
ALCATEL/SENEFFOISE	CA 519 J/J2A/JM	3,90	15,60	17,20	H008
ALCATEL/SENEFFOISE	CA 19 J / J2A / JM	3,90	15,80	17,20	H008
ALCATEL/SENEFFOISE	CA 318 J/J2A/JM	3,45	15,60	17,20	H033
ALCATEL/SENEFFOISE	ACW5PTC.715	4,22	17,40	18,16	H053
ALCATEL/SENEFFOISE	ACW4PTC.860	5,16	21,03	21,84	M054
ALCATEL/SENEFFOISE	5750 J/JB/JB2A/JM-ACE5PTC.750	4,26	17,30	19,10	M066
ALCATEL/SENEFFOISE	5875 J/JB/JB2A/JM-ACE4,5PTC.875	4,93	20,20	22,20	M067
ALCATEL/SENEFFOISE	CA 529 J/J2A	5,70	23,10	25,40	R007
ALCATEL/SENEFFOISE	51000J/JB/JB2A	5,59	22,60	25,40	R068
ALCATEL/SENEFFOISE	CA 328 J/J2A	5,10	23,50	25,00	R083
BEDEA	TELESS 111	1,10	4,90	5,50	A025
BEDEA	0,7/4,8 (DK)	0,72	4,65	5,25	A025
BEDEA	TELESS 100	1,00	4,90	5,60	A025
BEDEA	0,72/4,8z	0,72	4,80	5,40	A025
BEDEA	0,7/4,5 s (CH)	0,75	4,50	5,20	A025
BEDEA	0,7/4,5z	0,75	4,50	5,20	A025
BEDEA	TELESS 88	0,75	4,50	5,25	A025
BEDEA	COAX 12 (NL)	0,72	4,65	5,25	A025
BEDEA	1,1/4,9 C-PE	1,12	4,90	5,50	A025
BEDEA	0,72/4,8 (DIN 0887)	0,72	4,80	5,40	A025
BEDEA	TELESS 80	0,80	3,70	4,50	A043
BEDEA	TELESS 77	0,70	4,50	4,80	A043
BEDEA	TELESS 66	0,60	3,70	4,40	A043
BEDEA	TELESS 160	1,60	7,30	8,00	B004
BEDEA	TELESS 160T	1,60	7,30	8,30	B004

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

CABLE DATA



CABLE/CONNECTOR GUIDE SORTED BY CABLE MANUFACTURE

Cable manufacture	Cable name	innercond	dielectric	outer cond.	sheath	PPC type
BEDEA	1,6/7,3 C-PE	1,60	7,30	8,30	9,70	B004
BEDEA	1,1/7,3	1,10	7,30	7,50	10,00	B039
BEDEA	1,1/7,3	1,10	7,25	8,00	10,00	B039
BEDEA	1,1/7,3	1,10	7,30	8,00	10,50	B039
BEDEA	L6	1,70	6,95	7,20	10,50	B040
BEDEA	A-2YKT2Y 1 x (1,1/7,3) KxLg	1,10	7,30	7,80	11,00	B071
BEDEA	A-2YK2Y 1 x (1,1/7,3)KxLg	1,10	7,30	7,80	11,00	B071
BEDEA	AB-2YKYD 1 x (1,1/7,3) KxLg	1,10	7,30	7,80	11,00	B071
BEDEA	TELASS 220 KU 75 ohm	2,20	10,20	10,80	12,80	D006
BEDEA	2,25/9,8 C-PE	2,25	9,80	10,60	12,60	D006
BEDEA	A-2YOK2Y 1 x (2,2/8,8) KxLg	2,20	8,80	9,30	12,50	D015
BEDEA	L5	2,20	8,80	9,10	12,50	D015
BEDEA	1,8/11,5	1,80	11,30	11,50	14,00	E005
BEDEA	TELASS 240	2,40	11,50	12,20	15,00	E063
BEDEA	A-2YOK2Y 1 x (3,3/13,5) KxLg	3,27	13,50	13,70	17,00	G003
BEDEA	L3	3,27	13,50	14,00	17,50	G003
BEDEA	L3 ARM.	3,40	13,80	14,00	17,60	G003
BEDEA	2,6/17,3	2,65	17,30	17,50	20,20	H081
BEDEA	L2	4,90	19,30	19,60	22,50	M017
BEDEA	TELASS 40	0,40	2,00	2,70	3,60	upon req.
BEDEA	TELASS 50	0,45	2,20	2,90	3,65	upon req.
BEDEA	TELASS 70	0,65	3,00	3,60	4,30	upon req.
BEDEA	FLEX 0,5Lz/3,0z	0,50	3,00	3,60	5,00	upon req.
BEDEA	3,65/23,8	3,65	23,50	23,80	27,00	R082
BEDEA	M17/6 - RG12	1,20	7,24	0,00	10,30	RG11/12
BEDEA	M17/6 - RG11	1,20	7,24	0,00	10,30	RG11/12
BEDEA	M17/64 - RG164	2,65	17,27	0,00	22,10	RG164/35
BEDEA	M17/64 - RG35	2,65	17,27	0,00	22,10	RG164/35
BEDEA	M17/77 - RG216	1,20	7,24	0,00	10,80	RG216
BEDEA	M17/29 - RG59	0,58	3,71	0,00	6,15	RG59
BEDEA	L1,5	7,25	28,90	29,30	33,30	S016
BEDEA	20 AWG 59/U - 1186A/1187A/1188A	0,81	3,66	0,00	6,73	A025
BEDEA	20 AWG 59/U 8281	0,81	5,03	5,70	7,75	A025
BEDEA	18 AWG 6/U	0,95	4,57	5,20	6,99	A025
BEDEA	18 AWG 6/U - 1189A/1190A/1191A	0,95	4,57	5,50	7,49	A025
BEDEA	RG6 STAND.DOUB. II	1,02	4,57	5,40	6,90	A025
BEDEA	20 AWG 59/U	0,81	3,63	4,50	6,10	A043
BEDEA	RG59 STAND.DOUB.II	0,81	3,63	4,50	6,10	A043
BEDEA	RG7 STAND.DOUB. II	1,29	5,72	6,60	8,10	A125/15

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CABLE MANUFACTURE

Cable manufacture	Cable name	innercond	dielectric outer cond.	sheath	PPC type
BELDEN	RG11/U TYPE 9292	1,63	7,24	7,80	10,30
BELDEN	RG11 STAND.D0UB. II	1,63	7,11	8,00	10,20
BELDEN	15 AWG 6/U - 1160A OVERSIZED	1,40	6,53	0,00	9,40
BELDEN (POPE)	H 105	0,70	4,60	5,70	7,20
BELDEN (POPE)	RG 6CU	1,00	4,60	5,40	6,90
BELDEN (POPE)	RG 6	1,02	4,57	5,40	6,90
BELDEN (POPE)	H 125 AL	1,00	4,80	5,30	6,80
BELDEN (POPE)	H 109 CU	1,00	4,70	5,30	6,30
BELDEN (POPE)	H 114	0,75	4,70	5,30	6,80
BELDEN (POPE)	H 124	1,00	4,40	4,70	5,80
BELDEN (POPE)	H 106	0,58	3,70	4,80	6,00
BELDEN (POPE)	RG 59	0,81	3,66	4,50	6,00
BELDEN (POPE)	RG 7 STD.	1,29	5,72	6,60	8,10
BELDEN (POPE)	NK MCUM 1.1/7.3	1,10	7,35	7,80	10,00
BELDEN (POPE)	PRG 11 CU FOAM PE/PVC	1,55	7,25	7,90	10,10
BELDEN (POPE)	PRG 11 AL PE/PVC	1,55	7,25	7,90	10,10
BELDEN (POPE)	RG 11 PE/PVC	1,63	7,11	8,00	10,20
BELDEN (POPE)	H 43	1,66	7,15	7,80	9,80
BELDEN (POPE)	RG 11	1,63	7,11	8,00	10,20
BELDEN (POPE)	COAX 6 SAS	1,61	7,55	8,20	11,10
BELDEN (POPE)	MCUM 1.1/7.3	1,10	7,30	7,80	10,00
BELDEN (POPE)	H43AL	1,66	7,15	7,80	10,80
BELDEN (POPE)	H48	2,30	9,60	10,50	12,90
BELDEN (POPE)	H48AL	2,30	9,60	10,50	13,70
BELDEN (POPE)	COAX 4 F14 SLIMLINE & FOAM	2,20	10,20	10,50	13,80
BELDEN (POPE)	COAX 4 FB14 SLIMLINE & FOAM	2,20	10,20	11,00	13,80
BELDEN (POPE)	COAX 6 MASSIEF	1,75	11,50	12,00	15,10
BELDEN (POPE)	COAX 3 F 18 SLIMLINE & FOAM	3,40	14,90	15,30	18,00
BELDEN (POPE)	COAX 3 SAS	3,40	16,50	17,60	21,60
BELDEN (POPE)	COAX 3 FB 20 SLIMLINE & FOAM	3,40	14,90	15,80	19,80
BELDEN (POPE)	H 122	0,40	2,00	2,60	3,70
BELDEN (POPE)	H 123	0,65	2,90	3,40	4,20
BELDEN (POPE)	H 121 CU/AL	0,80	3,50	3,90	5,00
BELDEN (POPE)	COAX 3 MASSIEF	3,65	23,80	24,50	29,00
BELDEN (POPE)	MT7/16 RG11 A/U	1,20	7,25	0,00	10,30
BELDEN (POPE)	MT7/77 RG216 U	1,20	7,25	0,00	10,80
BELDEN (POPE)	MT7/29 RG59 B/U	0,58	3,70	0,00	6,15
BIEFFE	12 IC	1,15	4,90	5,60	6,80
BIEFFE	C-0-12/R CATV	1,15	5,10	5,70	7,00

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CABLE MANUFACTURE

Cable manufacture	Cable name	innercond	dielectric outer cond.	sheath	PPC type
BIEFFE	9 CA	0,75	4,80	5,30	A025
BIEFFE	C80 ST	0,75	4,80	5,30	A025
BIEFFE	C80	0,75	4,80	5,30	A025
BIEFFE	9 CU	0,75	4,80	5,30	A025
BIEFFE	C-0-10 SAT	1,00	4,70	5,30	A025
BIEFFE	C-0-12/A SAT	1,15	5,10	5,70	A025
BIEFFE	12 C/OE	1,10	4,90	5,30	A025
BIEFFE	115 EA	1,15	4,90	5,60	A025
BIEFFE	C80 AG	0,75	4,80	5,36	A025
BIEFFE	12 ICE	1,15	4,90	5,60	A025
BIEFFE	12 ICAG	1,15	5,10	5,60	A025
BIEFFE	12 ICS	1,15	4,90	5,60	A025
BIEFFE	C-0-8 SAT	0,80	3,90	4,50	A043
BIEFFE	C-0-165 SAT	1,65	7,20	7,90	B004
BIEFFE	C-0-165/R CATV	1,65	7,20	7,60	B004
BIEFFE	C-0-14/R CATV	1,40	6,50	7,10	B042
BIEFFE	C-0-14 SAT	1,40	6,50	7,10	B042
BIEFFE	C-0-220/R CATV	2,20	9,60	10,50	D006
BIEFFE	RG11/U	1,20	7,24	0,00	RG11/12
BIEFFE	RG59 B/U	0,58	3,71	0,00	RG59
BOSCH	CK 1175	0,75	4,80	5,20	A025
BOSCH	CKE 11	0,75	4,80	5,20	A025
BOSCH	CKG 12	0,77	4,60	5,10	A025
BOSCH	CK 875	1,10	7,30	7,50	B039
BOSCH	CK 875 TS	1,10	7,30	7,50	B039
BOSCH	CKP 7	1,20	7,30	7,80	B071
BOSCH	BKP 4	2,20	8,80	9,30	D015
BOSCH	CK 575 TS	1,80	11,50	11,70	E005
BOSCH	CK 575	1,80	11,50	11,70	E005
BOSCH	BKP 3	3,30	13,50	14,00	G003
BOSCH	CKF 22	0,41	2,00	2,80	upon req.
CAVEL	SAT 699	1,00	4,50	5,10	A025
CAVEL	1210N/E/S/A-1212-CU113	1,13	5,00	5,50	A025
CAVEL	11/50 FC	1,10	5,00	5,40	A025
CAVEL	0,75/4,8 PE	0,75	4,80	5,45	A025
CAVEL	CU 33/ST33/AG33/CS75/KF75/AL75	0,75	4,80	5,30	A025
CAVEL	KF113/AL113/SAT703/SAT752	1,13	4,80	5,40	A025
CAVEL	KF13AS/PE	1,25	5,50	6,20	A031
CAVEL	1010N	1,00	4,50	4,90	A043

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CABLE MANUFACTURE

Cable manufacture	Cable name	innercond	dielectric outer cond.	sheath	PPC type
CABEL	CU 22	0,65	4,10	4,50	5,60
CABEL	17/73 FC	1,63	7,20	7,90	10,10
CABEL	SAT704/-5/CATV704/11/RG117/K16	1,65	7,30	8,00	10,30
CABEL	1.0/6.5 PE	1,00	6,50	7,20	9,70
CABEL	KP22AS/PE	2,20	9,90	10,60	12,70
CABEL	22/99 FC	2,20	9,90	10,50	12,70
CABEL	27/115 FC	2,70	11,50	12,30	15,00
CABEL	7510	0,75	3,60	4,00	5,00
CABEL	RG 11/U	1,20	7,24	0,00	10,30
CABEL	RG 59 B/U	0,58	3,71	0,00	6,15
CABEL	6FT50P / 6FT50V	1,02	4,70	5,20	7,20
CABEL	65ST50P 7 65ST50V	0,72	4,70	5,20	7,00
CABEL	59 S-P / 59 S-V	0,64	3,70	0,00	6,50
CABEL	59 F-P / 59 F-V	0,81	3,70	0,00	6,40
CABEL	11 F-P / 11 F-V	1,63	7,25	0,00	10,60
CABEL	11 S-P / 11 S-V	1,10	7,25	0,00	10,50
COMMScope	6 STANDARD / TRISHIELD	1,02	4,57	5,50	7,00
COMMScope	59 SUPER SHIELD 53%+35%	0,81	3,66	5,20	6,73
COMMScope	6 SUPER SHIELD 60%+40%	1,02	4,57	6,15	7,62
COMMScope	59 STANDARD / TRISHIELD	0,81	3,66	4,50	6,10
COMMScope	7 STANDARD / SUPER SHIELD	1,30	5,72	7,30	8,59
COMMScope	11 STANDARD SHIELD 60% BR.	1,63	7,11	7,89	10,03
COMMScope	11 SUPER SHIELD 60%+40%	1,63	7,11	8,71	10,29
COMMScope	QR 320-JC/A/ASS/ACASS/AM109	1,80	7,47	8,15	10,03
COMMScope	P3-75-412-JC/A/ASS/ACASS/AM109	2,26	9,19	10,46	13,00
COMMScope	P3-75-500-JC/A/ASS/ACASS/AM109	2,77	11,43	12,70	14,22
COMMScope	F50TSEF	2,75	11,55	12,45	14,85
COMMScope	F50TSV	2,77	11,56	12,30	15,00
COMMScope	P3-75-625-JC/A/ASS/ACASS/AM109	3,48	14,30	15,90	17,40
COMMScope	QR540-JC/A/ASS/ACASS/AM109	3,15	13,03	13,72	15,49
COMMScope	QR715-JC/A/ASS/ACASS/AM188	4,22	17,42	18,16	19,94
COMMScope	QR860-JC/A/ASS/ACASS/AM188	5,16	21,03	21,84	24,38
COMMScope	P3-75-750-JC/A/ASS/ACASS/AM109	4,24	17,22	19,05	20,83
COMMScope	P3-75-875-JC/A/ASS/ACASS/AM250	4,93	20,24	22,23	24,00
COMMScope	P3-75-1000-JC/A/ASS/ACASS	5,59	22,61	25,40	27,43
COMMScope	QR1125-JC/A/ASS/ACASS	6,68	27,46	28,58	31,12
CORTAILLOD	HF75C 1,2/5,6 FLEX	1,20	5,40	5,80	7,00
CORTAILLOD	HF75C 2,0/9,3 FLEX	2,00	9,10	9,90	12,50
CORTAILLOD	HF75C 2,0/9,3 CIT	2,00	9,30	9,70	12,50

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CABLE MANUFACTURE

Cable manufacture	Cable name	innercond	dielectric outer cond.	sheath	PPC type
CORTAILLOD	HF75C 2,65/11,5 ALU-T2T	2,65	11,20	12,80	E051
CORTAILLOD	HF75C 3,2/15,0 CLT	3,20	15,00	15,40	H058
CORTAILLOD	HF75C 4,3/20,4 CLT	4,30	20,40	20,80	M059
CORTAILLOD	HF75C 4,2/17,6 ALU T2T	4,20	17,60	19,40	M062
CORTAILLOD	HF75C 9,1/38,0 ALU T2T	9,10	38,00	40,80	upon req.
CORTAILLOD	HF75C 15/8" CU2Y	9,10	38,00	38,50	upon req.
CORTAILLOD	HF75C 5,7/23,5 ALU T2T	5,70	23,50	25,70	R018
CORTAILLOD	HF75C 5,2/24,6 CLT	5,20	24,60	25,00	R060
CZECH	HF 75/7G	1,20	6,30	8,00	B032
CZECH	VRCZE 75/6,5	1,20	6,30	8,40	B032
CZECH	VRCZE 75/6,4	1,40	6,00	7,40	B040
CZECH	VRCZE 75/12,2	2,70	12,20	13,70	G009
CZECH	HF 75/16D	3,80	0,00	16,40	M041
CZECH	VRCZE 75 22,8	5,00	22,20	25,30	R083
DÄTWYLER	FS-0630-U	0,75	4,80	5,25	A025
DÄTWYLER	FS0614	0,75	4,80	5,40	A025
DÄTWYLER	FS-0480-U	1,07	4,80	5,30	A025
DÄTWYLER	FS-0633-U	1,10	7,25	0,00	B039
DÄTWYLER	FS-0602-U	1,10	7,25	0,00	B039
DÄTWYLER	FS0716-U	1,10	7,25	0,00	B039
DÄTWYLER	FS-0715-U	1,56	7,15	0,00	B040
DÄTWYLER	FD0412	2,40	9,20	10,50	D049
DÄTWYLER	FS-0596/01	1,75	11,60	0,00	E005
DÄTWYLER	FS-0596-U	1,75	11,60	0,00	E005
DÄTWYLER	FD0500	3,00	11,30	12,70	G050
DÄTWYLER	FS-0582 (4dB)	2,60	17,30	17,50	H081
DÄTWYLER	FD0750	4,50	16,50	19,10	M072
DÄTWYLER	FS-1160	2,50	11,60	12,30	upon req.
DÄTWYLER	FS-0875	1,90	8,75	9,50	upon req.
DÄTWYLER	FD1000	6,00	22,50	25,40	R077
DÄTWYLER	FS-0597 (3dB)	3,65	23,70	23,90	R082
DELTA	TR165/725	1,65	7,20	7,95	B004
DELTA	TR165UG/725MB	1,65	7,20	7,95	D069
DELTA	TR233/1000	2,33	10,05	10,80	D074
DELTA	TR264/1150	2,60	11,25	12,10	E063
DELTA	TR233/1000MB	2,33	10,05	10,80	E075
DELTA	TR305/1300	3,05	13,10	14,00	G078
DELTA	TR305/1300MB	3,05	13,10	14,00	G079
DELTA	TR264/1150MB	2,60	11,25	12,10	G100

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CABLE MANUFACTURE

Cable manufacture	Cable name	innercond	dielectric outer cond.	sheath	PPC type
DELTA	TR410UG/1800MB	4,10	18,00	22,30	M080
DELTA	TR680UG/2900MB	6,80	29,00	33,50	upon req.
ERICSSON	KTV 1,0/4,8 CV	1,00	4,80	6,80	A025
ERICSSON	KTV 0,7/4,8 HV / HE	0,70	4,80	5,60	A025
ERICSSON	KTV 1,2/5,3 CV	1,20	5,30	7,20	A031
ERICSSON	KTV 1,2/5,3 CE	1,20	5,30	7,20	A031
ERICSSON	KTV 0,8/3,6 CV	0,80	3,60	5,60	A043
ERICSSON	KTV 1,6/7,3 CV / CE / CEL	1,60	7,30	10,10	B004
ERICSSON	KTV 2,0/8,3 CV / CE / CEL	2,00	8,30	12,00	D026
ERICSSON	KTV 3,9/15,8 CV / CE / CEL	3,90	15,80	19,80	H008
EUPEN	705RT3 0,72/4,75	0,72	4,75	6,90	A025
EUPEN	705CRT7 - 7059SP	1,03	4,57	6,80	A025
EUPEN	C6 705CRT5V / C6 70W05CRT5V	1,00	4,60	6,90	A025
EUPEN	C5 705CR2V / C5 705CRT2	1,00	4,60	6,90	A025
EUPEN	70W04CRT2 - 5 - 5V	0,80	3,60	5,80	A043
EUPEN	704RT1 0,82/3,7 - 7045	0,82	3,70	5,80	A043
EUPEN	704TT3 RG59 U - SP.7043	0,64	3,70	5,80	A043
EUPEN	704RT3 0,58/3,7 - 7044	0,58	3,70	5,80	A043
EUPEN	707CRT5	1,63	7,11	10,10	B004
EUPEN	707RT1 1,63/7,25	1,63	7,25	10,20	B004
EUPEN	707RT3 1,11/7,25	1,11	7,25	10,20	B039
EUPEN	7061-1/4"	1,40	6,50	9,70	B040
EUPEN	706RT1 1,4/6,5 - 7063	1,40	6,50	9,40	B042
EUPEN	B4 707 RT8V	1,70	6,90	10,80	B118
EUPEN	B4 7088LD	2,00	8,30	11,30	D026
EUPEN	7081	1,75	8,20	11,30	D026
EUPEN	7091	1,96	8,75	11,30	D026
EUPEN	7097LD - 3/8"	2,30	9,35	12,50	D046
EUPEN	A3 7118LD	2,65	11,20	14,40	E029
EUPEN	7127LD - 1/2"	2,89	11,60	15,30	E064
EUPEN	7121 - 1/2"	2,70	12,40	16,30	G009
EUPEN	A2 7128LD - 1/2"	3,10	12,40	16,30	G009
EUPEN	A2+ 7168LD - 5/8"	3,90	16,00	20,00	H008
EUPEN	7168LDA	3,90	15,00	19,80	H008
EUPEN	7161 - 5/8"	3,45	16,00	19,80	H033
EUPEN	7177LD - 3/4"	4,27	17,30	21,60	M066
EUPEN	7178LD	4,30	17,00	22,20	M103
EUPEN	A0 7378LD	9,10	37,50	43,00	upon req.
EUPEN	A1 7228LD - 7/8"	5,70	23,50	28,00	R007

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CABLE MANUFACTURE

Cable manufacture	Cable name	innercond	dielectric outer cond.	sheath	PPC type
EUPEN	AT 7228LD - 7/8"	5,80	23,50	27,90	R007
EUPEN	7221 - 7/8"	5,10	23,50	28,00	R083
EUPEN	RG/U 11A	1,20	7,25	10,30	RG11/12
EUPEN	RG/U 12A	7,04	7,25	10,30	RG11/12
EUPEN	RG/U 16A	2,65	17,30	22,10	RG16A/35
EUPEN	RG/U 35B	2,65	17,30	22,10	RG16A/35
EUPEN	RG/U 216	1,20	7,25	10,80	RG216
EUPEN	RG/U 59	0,58	3,70	6,15	RG59
EUPEN	RG/U 6A	0,72	4,70	8,40	RG6
F & G	0,7/4,8 AF 127 320 00	0,70	4,80	7,00	A025
F & G	0,7/4,8 F 127 315 00	0,70	4,80	7,00	A025
F & G	0,8/3,7 f 127 317 00	0,80	3,70	6,00	A043
F & G	0,7/4,5 zv 127 319 00	0,70	4,50	6,30	A043
F & G	1,6/7,3 AF 127 530 00	1,60	7,30	10,50	B004
F & G	A-2YK2Y1Kx 1,1/7,3	1,10	7,30	11,00	B071
F & G	A-2YK2Y1mKx 2,2/8,8	2,20	8,80	12,50	D015
F & G	2,0/9,3A	2,00	9,30	12,80	D046
F & G	2,5/11,5A	2,55	11,60	15,00	E064
F & G	A-2YK2Y1qKx 3,3/13,5	3,27	13,50	17,00	G003
F & G	1-2YK2Y1sKx 4,9/19,4	4,90	19,40	24,50	M002
FMC CABLES	RG12/U	1,20	7,20	10,30	RG11/12
FMC CABLES	RG11/U	1,20	7,20	10,30	RG11/12
FMC CABLES	RG35/U	2,65	17,30	22,10	RG16A/35
FMC CABLES	RG16A/U	2,65	17,30	22,10	RG16A/35
FMC CABLES	RG216	1,20	7,24	10,80	RG216
FMC CABLES	RG59B/U	0,58	3,70	6,20	RG59
FMC CABLES	RG6/U	0,72	4,80	8,50	RG6
FUJIKURA	S-SC-FS	1,05	4,95	7,60	A025
HCF	HCF 1/2" Cu2Y 75 Ohm	2,11	8,50	15,00	E109
ITC		1,13	4,60	6,20	A025
ITC	EXTRA100+AMEL100	1,02	4,60	6,40	A025
ITC	100+110+110CU	0,75	4,80	6,40	A025
ITC	SAT 300	1,13	5,00	6,70	A025
ITC	125+135	1,00	4,50	6,40	A025
ITC	120+130/4+139+140+140Z	1,13	5,00	6,80	A025
ITC	141Z+141SP+150+150/16	1,13	5,00	6,80	A025
ITC	160+333ST+333RB+333SB+333R	1,13	5,00	6,80	A025
ITC	340+350	1,13	5,00	6,80	A025
ITC	DIGITAL SAT	1,13	5,00	7,20	A025

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CABLE MANUFACTURE

Cable manufacture	Cable name	innercond	dielectric outer cond.	sheath	PPC type
ITC	110C/U 74	1,00	5,30	0,00	A031
ITC	PA 155 SAT	1,55	7,30	0,00	B004
ITC	PA 163 SAT ALL	1,63	7,30	7,80	B004
ITC	140Z INT	1,00	6,30	0,00	B042
KABELMETAL	0,8/4,8 CU+FCU	0,80	4,80	5,60	A025
KABELMETAL	CAF 1,1/5,3 Cu	1,14	5,30	5,60	A031
KABELMETAL	0,6/3,7 CU	0,60	3,70	4,40	A043
KABELMETAL	0,7/4,4 CU+DCU	0,70	4,40	0,00	A043
KABELMETAL	CAF 1,6/7,3 Cu	1,60	7,30	7,80	B004
KABELMETAL	CAD 1,1/7,3 Cu	1,10	7,30	7,70	B039
KABELMETAL	CF 1/4" CU 2Y	1,50	6,00	7,50	B040
KABELMETAL	CAW 1,5/6,0 CU	1,50	6,00	7,50	B040
KABELMETAL	CAD 1,0/6,5 Cu	1,00	6,50	6,90	B042
KABELMETAL	CAX 1,1/7,3 Cu	1,10	7,30	7,80	B071
KABELMETAL	CAF 1,6/7,3 AL	1,60	7,30	8,50	B107
KABELMETAL	L-CAW 2,1/8,3 CU	2,08	8,30	9,50	D015
KABELMETAL	CALC 2,2/8,8 CU	2,20	8,80	9,30	D015
KABELMETAL	CAW 1,8/8,3 CU	1,80	8,30	9,50	D015
KABELMETAL	L-CAW 2,0/8,1 CU	2,00	7,50	9,30	D026
KABELMETAL	CAF 1,9/8,8 Cu	1,90	8,80	9,30	D026
KABELMETAL	CAX 1,8/11,5 Cu	1,80	11,50	12,00	E005
KABELMETAL	CAD 1,8/11,6 Cu	1,80	11,50	11,90	E005
KABELMETAL	CAF 2,5/11,4 Cu	2,50	11,40	12,20	E063
KABELMETAL	CAF 2,5/11,4 AL	2,50	11,40	12,60	E064
KABELMETAL	CAW 2,8/11,6 CU	2,80	11,60	13,70	G009
KABELMETAL	L-CAW 3,0/12,2 CU	3,00	11,60	13,70	G009
KABELMETAL	LCF 1/2" CU2Y	3,10	11,60	13,70	G009
KABELMETAL	CF 1/2" CU 2Y	2,80	11,60	13,70	G009
KABELMETAL	L-CAW 3,9/15,6 CU	3,90	15,00	17,20	H008
KABELMETAL	CAW 3,5/15,6 CU	3,50	15,60	17,20	H033
KABELMETAL	CAD 2,6/17,3 Cu	2,70	17,30	17,70	H081
KABELMETAL	CAF 3,7/17,3 AL	3,80	17,30	18,90	M066
KABELMETAL	CAX 2,9/19,4 Cu	2,93	19,40	20,00	M089
KABELMETAL	LCF 7/8" CU 2Y	5,70	22,00	24,90	R007
KABELMETAL	L-CAW 5,7/22,8 CU	5,70	22,00	24,90	R007
KABELMETAL	CAW 5,2/22,0 CU	5,20	22,00	24,90	R083
KABELMETAL	CF 7/8" CU 2Y	5,20	22,00	24,90	R083
NKF	COAX 12PE	0,70	4,60	5,25	A025
NKF	COAX 12 PVC	0,70	4,60	5,25	A025

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CABLE MANUFACTURE

Cable manufacture	Cable name	innercond	dielectric outer cond.	sheath	PPC type
NKF	BAMBOO 6 - +/- ARMoured	1,70	6,95	7,20	B040
NKF	BAMBOO 3 - +/- ARMoured	3,30	13,50	14,20	H073
NKF	BAMBOO 3 DBD	3,30	13,50	14,20	H073
NKF	BAMBOO 1,5 - +/- ARMoured	7,25	28,90	29,30	S016
NKF	BAMBOO 1,5 DBD	7,25	28,90	29,30	S016
NKT	KJ 0712	0,70	4,80	5,00	A025
NKT	KJFF 0712	0,70	4,80	6,20	A031
NKT	KJ 1108	1,10	7,30	7,50	B039
NKT	KJ 1706	1,75	11,50	11,80	E005
NKT	KJ 2604 / KJA 2604	2,60	17,30	17,40	H081
NKT	KJ 3606 / KJA 3606	3,62	23,80	24,10	R082
NKT	MT7/6 RGT1 A/U	1,20	7,25	8,15	RGT1/12
NKT	MT7/29 RG59B/U	0,58	3,70	4,50	RG59
NOKIA	1,1/5,0AF+F	1,10	5,00	0,00	A025
NOKIA	0,7/4,5AF	0,70	4,50	0,00	A025
NOKIA	0,7/4,8F	0,70	4,80	0,00	A025
NOKIA	TELLU 13	1,00	4,80	5,60	A025
NOKIA	NK11AB+CN+CB+CN/8	1,10	5,00	5,60	A025
NOKIA	1,0/4,8AF	1,00	4,80	0,00	A025
NOKIA	TELLU 17	0,75	3,85	4,60	A043
NOKIA	0,6/3,7	0,60	3,70	0,00	A043
NOKIA	NK16CN+CN/8	1,60	7,30	8,00	B004
NOKIA	1,6/7,3AF+F	1,60	7,30	7,80	B004
NOKIA	NK17CN	1,70	6,90	7,60	B014
NOKIA	1,0/6,6	1,00	6,60	0,00	B042
NOKIA	TELLU 7	1,70	7,30	8,20	B107
NOKIA	SM 7	1,70	7,30	8,20	B107
NOKIA	NK22CN	2,20	8,80	9,50	D015
NOKIA	INVAU 1,9/9,2 Alu	1,90	9,20	10,60	E128
NOKIA	TELLU 5	2,80	11,80	13,10	G105
NOKIA	SM 5	2,80	11,80	13,10	G105
NOKIA	TELLU 3	4,20	17,60	19,10	M103
NOKIA	SM 3	4,20	17,60	19,10	M103
NOKIA	INVAU 3,7/17,3 Alu	3,70	17,30	19,10	M129
NOKIA	TELLU SUPERTRUNK	5,70	23,50	25,00	R007
NOKIA	SM SUPERTRUNK	5,70	23,50	25,00	R007
NOKIA	RG11	1,20	7,25	8,00	RGT1/12
NOKIA	RG164	2,65	17,30	0,00	RG164/35
NOKIA	RG216	1,20	7,25	8,80	RG216

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CABLE MANUFACTURE

Cable manufacture	Cable name	innercond	dielectric outer cond.	sheath	PPC type
NOKIA	RG59		3,70	0,00	RG59
PIRELLI CABLES	Y1100	0,58	4,95	5,60	A025
PIRELLI CABLES	Y1507+Y1518	1,00	4,95	7,10	A025
PIRELLI CABLES	Y1507+Y1518	1,27	5,50	8,50	A125/15
PIRELLI CABLES	Y1606+Y1628	1,67	7,25	8,30	B004
PIRELLI CABLES	GE B4 272-14303	1,70	6,90	0,00	B034
PIRELLI CABLES	URM57	1,15	7,25	8,00	B039
PIRELLI CABLES	Y1529	1,27	5,50	6,90	B042
PIRELLI CABLES	GE B4 272 30516	1,70	6,90	0,00	B118
PIRELLI CABLES	Y1705+Y1617	2,33	10,00	11,00	D074
PIRELLI CABLES	GE A3 272-34801,-30722	2,77	11,30	0,00	E037
PIRELLI CABLES	Y1804+Y1815	2,60	11,50	12,60	E063
PIRELLI CABLES	Y1727	2,33	10,00	11,38	G100
PIRELLI CABLES	Y1826	2,60	11,50	12,88	G105
PIRELLI CABLES	GE A2 272-30060,-30515	3,30	13,30	0,00	H038
PIRELLI CABLES	GE A3 30722	2,77	11,30	0,00	upon req.
PIRELLI CABLES	Y1639	1,67	7,25	8,63	upon req.
PIRELLI CABLES	URM43	0,90	2,95	3,60	upon req.
RAYDEX/CDT	CT100 PVC/PE	1,00	4,45	5,15	A025
RAYDEX/CDT	RF100	1,00	4,45	5,05	A025
RAYDEX/CDT	CTF100 (FOAM)	1,00	4,80	5,50	A025
RAYDEX/CDT	URM203	1,12	5,10	5,70	A025
RAYDEX/CDT	SAT100 (PVC)	1,00	4,80	5,35	A025
RAYDEX/CDT	CTF75 (PVC)	0,75	4,60	5,15	A025
RAYDEX/CDT	CTF113	1,13	5,10	5,80	A031
RAYDEX/CDT	CT125PE/PVC	1,25	5,50	6,20	A031
RAYDEX/CDT	RF125	1,25	5,50	6,20	A031
RAYDEX/CDT	RA701/703/7707/708	0,58	3,70	4,30	A043
RAYDEX/CDT	CTF81 (PVC)	0,81	3,65	4,35	A043
RAYDEX/CDT	CT100RBS	1,00	4,45	5,15	A090
RAYDEX/CDT	CTFA130	1,30	6,00	6,75	A125/15
RAYDEX/CDT	CT167PE	1,67	7,28	7,98	B004
RAYDEX/CDT	RA721	1,67	7,28	7,88	B004
RAYDEX/CDT	CTF167PVC	1,67	7,28	7,98	B004
RAYDEX/CDT	RA717	1,20	7,24	7,92	B039
RAYDEX/CDT	URM57	1,15	7,25	8,15	B039
RAYDEX/CDT	CT125RBS	1,25	5,50	6,20	B117
RAYDEX/CDT	CT167RBS	1,67	7,28	7,98	B118
RAYDEX/CDT	URM57RBS	1,15	7,25	8,15	D032
RAYDEX/CDT	CT167PE/AB+RBS/AB	1,67	7,28	7,98	D069

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CABLE MANUFACTURE

Cable manufacture	Cable name	innercond	dielectric outer cond.	sheath	PPC type
RAYDEX/CDT	CT233PE	2,33	10,06	10,80	D074
RAYDEX/CDT	CTF200PE	2,00	8,70	10,15	D134
RAYDEX/CDT	CT264PE	2,60	11,40	12,10	E063
RAYDEX/CDT	CT233PE/AB+RBS/AB	2,33	10,06	10,80	E075
RAYDEX/CDT	CT233RBS	2,33	10,06	10,80	E075
RAYDEX/CDT	CT305PE	3,05	13,10	13,80	G078
RAYDEX/CDT	CT305PE/AB+RBS/AB	3,05	13,10	13,80	G079
RAYDEX/CDT	CT305RBS	3,05	13,10	13,80	G079
RAYDEX/CDT	CT264PE/AB+RBS/AB	2,60	11,40	12,10	G100
RAYDEX/CDT	CT264RBS	2,60	11,40	12,10	G100
RAYDEX/CDT	CTF63	0,63	2,90	3,60	upon req.
SAT CABLES	SAT 0,8/5,2 PE/PVC	0,80	5,20	5,45	A025
SAT CABLES	0,75/4,8-72016+72018	0,75	4,80	5,00	A025
SAT CABLES	B4 SAT1,7/6,9 2969	1,70	6,90	7,20	B034
SAT CABLES	B4 SAT STD.	1,70	6,90	7,20	B040
SAT CABLES	A2 SAT 3,3/13,5 - 3033	3,33	13,30	13,80	H038
SAT CABLES	A3 SAT STD.	3,30	13,50	14,00	H073
SAT CABLES	A1 SAT 4,9/19,4	4,90	19,43	20,00	M002
SAT CABLES	A2 SAT STD.	4,10	16,00	16,50	upon req.
SAT CABLES	SAT 2,4/9,6 3034	2,36	9,60	10,00	upon req.
SAT CABLES	A2+ SAT 4,1/16 3031	4,06	16,10	16,80	upon req.
SAT CABLES	A1 SAT 6/23,3	6,00	23,30	23,90	R001
SIEMENS CABLES	S43010-L-A5	1,13	5,00	5,30	A025
SIEMENS CABLES	2YSTCY 0,75/4,8 + YCY	0,75	4,80	5,30	A025
SIEMENS CABLES	2VTCY 0,75/4,8	0,72	4,80	5,30	A025
SIEMENS CABLES	2YSTCSTY 0,72/4,8	0,72	4,80	5,30	A025
SIEMENS CABLES	2VGY 0,6/3,7	0,60	3,70	5,70	A043
SIEMENS CABLES	2VHOTK2Y 1,7/6,9	1,70	6,90	10,40	B040
SIEMENS CABLES	2VGY 1,0/6,5+YCCY	1,00	6,50	9,20	B042
SIEMENS CABLES	2YK2Y 1IKX 1,1/7,3	1,10	7,30	7,80	B071
SIEMENS CABLES	2YTK2Y 1,23/8,0	1,23	8,00	10,30	B092
SIEMENS CABLES	S43204-L-A	1,21	8,00	8,30	B092
SIEMENS CABLES	2YHOK2Y 1 NKX 2,2/8,8	2,20	8,80	9,30	D015
SIEMENS CABLES	S43207-L-A	1,75	11,60	11,90	E005
SIEMENS CABLES	2YHOK2Y 1 QKX 3,3/13,5	3,30	13,50	14,00	G003
SIEMENS CABLES	2YHOK2Y 3,3/13,5	3,30	13,50	14,00	H073
SIEMENS CABLES	S43209-L-A	3,65	23,90	24,20	R082
SUHNER CABLES	G 05273-01	0,81	4,80	5,50	A025
SUHNER CABLES	G 05233-13	0,73	4,80	5,40	A025

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com



CABLE/CONNECTOR GUIDE SORTED BY CABLE MANUFACTURE

Cable manufacture	Cable name	innercond	dielectric outer cond.	sheath	PPC type
SUHNER CABLES	S 07273-01	1.57	725	8,10	10,30
SUHNER CABLES	S 07233-05	1.57	725	8,20	10,30
SUHNER CABLES	GX 07273	1.20	725	8,10	10,30
SUHNER CABLES	SA 07273	1.57	725	7,80	10,00
SUHNER CABLES	SA 09273	2.00	920	9,70	12,30
SUHNER CABLES	SA 12273	2.50	11,50	12,00	15,00
SUHNER CABLES	SA 17273	3.80	17,30	17,80	21,40
SUHNER CABLES	SA 24273	5.10	23,70	24,20	28,20
SUHNER CABLES	RG11/U	1.20	725	8,10	10,30
SUHNER CABLES	RG216	1.20	725	8,70	10,80
SUHNER CABLES	GX04273	0.63	3,70	4,40	6,10
SUHNER CABLES	G 04233-XX + G 04273-XX	0.58	3,70	4,40	6,10
SUHNER CABLES	RG59	0.58	3,70	4,40	6,10
TIMES FIBER	RG59 QUADSHIELD	0.81	3,66	5,21	6,73
TIMES FIBER	RG6 TYPES STD.-TRISHIELD	1.02	4,57	5,40	6,95
TIMES FIBER	RG6 QUADSHIELD	1.02	4,57	6,12	7,54
TIMES FIBER	RG59 TYPES STD.-TRISHIELD	0.81	3,66	4,60	6,10
TIMES FIBER	7 SERIES QUAD. 60-36%	1.29	5,72	7,26	8,64
TIMES FIBER	7 SERIES STD.-TRISHIELD	1.29	5,72	6,83	8,20
TIMES FIBER	RG11 TYPES STD.-TRISHIELD	1.63	7,11	8,03	10,20
TIMES FIBER	RG11 QUADSHIELD	1.63	7,11	8,66	11,00
TIMES FIBER	T10 .412"	2.24	9,19	10,50	12,20
TIMES FIBER	T10 .500"	2.77	11,40	12,70	14,30
TIMES FIBER	TX10-15	2.77	11,56	12,45	14,99
TIMES FIBER	T10 .625"	3.45	14,30	15,90	17,90
TIMES FIBER	TX10 .565"	3.28	13,20	14,40	15,90
TIMES FIBER	TX10 .700"	4.14	16,60	17,90	19,80
TIMES FIBER	T10 .750"	4.22	17,20	19,10	20,80
TIMES FIBER	T10 .875"	4.93	20,20	22,20	24,50
TIMES FIBER	TX10 .840"	4.93	19,80	21,30	23,80
TIMES FIBER	T10 1000"	5.59	22,60	25,40	27,70
TIMES FIBER	TX10 1160"	6.83	27,00	29,50	32,00
TRILOGY	RG59 QUADSHIELD	0.81	3,66	5,26	6,88
TRILOGY	RG6 TYPES STD.TRISHIELD	1.02	4,57	5,50	7,10
TRILOGY	RG6 QUADSHIELD	1.02	5,57	6,17	7,80
TRILOGY	RG59 TYPES STD.-TRISHIELD	0.81	3,66	4,50	6,12
TRILOGY	RG7 TYPES STD.	1.30	5,72	6,55	8,18
TRILOGY	RG7 QUADSHIELD	1.30	5,72	7,32	8,80
TRILOGY	RG11 STD.	1.63	7,11	7,95	10,08
					B004
					B004
					B039
					B093
					D096
					E097
					H098
					R099
					RG11/12
					RG216
					RG59
					RG59
					RG59
					A025
					A025
					A031
					A043
					A125/15
					A125/15
					B004
					B055
					D046
					E047
					E120
					G048
					G121
					H122
					M066
					M067
					M123
					R051
					S124
					A025
					A025
					A031
					A043
					A125/15
					A125/15
					B004

PPC Denmark

Vaerkstedsvej 14
DK-4720 Praestoe
Denmark

Telephone: +45 55 99 17 22
Fax: +45 55 99 27 22
E-mail: ppc@ppc.dk
Web: www.ppc.dk

PPC

6176 East Molloy Road
East Syracuse · New York 13057-0278
USA

Telephone: +1 315 431 7200
Fax: +1 315 431 7201
E-mail: ppc@ppc-online.com
Web: www.ppc-online.com

[illegible]

2003.03.01

VARIOUS

