


# Installation cable Solarix CAT7 SSTP LSOHFR B2<sub>ca</sub>-s1,d1,a1

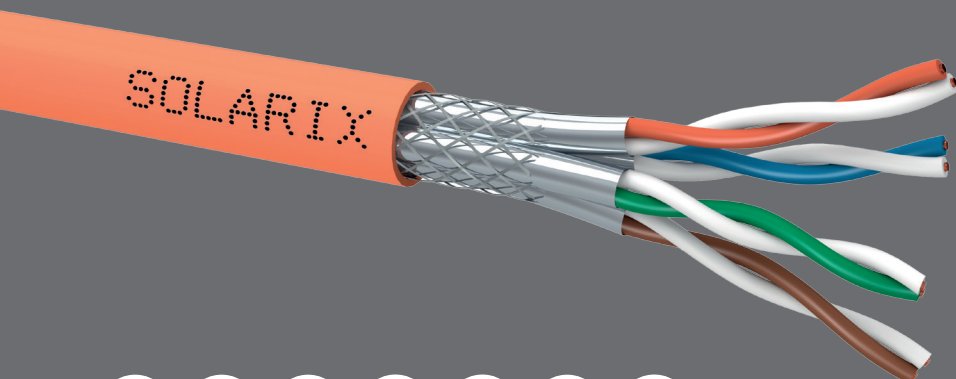

Product number:  
27000010

Type number:  
SXKD-7-SSTP-LSOHFR-B2<sub>ca</sub>

EAN barcode:  
8595684701043



## Key features

- High quality double shielded category 7/Class F installation cable tested up to 1 000 MHz
- Designed for the 10GBASE-T high-speed ethernet protocol
- S/FTP cable construction
- Due to the double shielding excellent resistance to alien crosstalk
- LSOHFR sheath with B2<sub>ca</sub>-s1,d1,a1 reaction to fire class
- Compliant with EN 60332-3-22 and EN 60332-3-24
- Cable conductors are made of high-quality copper wire with 99.97% purity
- The cable meets the ISO/IEC 11801 and EN 50173 cabling standards
- Its electrical performance has been authorized by the FORCE TECHNOLOGY independent testing laboratory in the EC VERIFIED certification program
- As for the EU CPR regulation (i.e. no. 305/2011), the cable has been tested by the FORCE CERTIFICATION A/S laboratory in the AVCP 1+ system

## Fire classification

Reaction to fire class	<b>B2<sub>ca</sub>-s1,d1,a1</b>
Assessment and verification	<b>AVCP 1+ system</b>
Notified body	<b>0200 FORCE CERTIFICATION A/S</b>
Declaration of performance	<b>M403-SXKD-7-SSTP-LSOHFR-B2<sub>ca</sub>-01</b>
Sheath type	<b>LSOHFR</b>
Sheath standards	<b>EN 60332-1-1, EN 60332-1-2, EN 60332-3-22, EN 60332-3-24, EN 60754-2, EN 61034-1, EN 61034-2, EN 50575</b>

## Cabling standards

General standards	<b>EN 50173-1, EN 50173-2, ISO/IEC 11801-1, ISO/IEC 11801-2</b>
Product standards	<b>EN 50288-4-1, IEC 61156-5</b>
Tested bandwidth	<b>1 000 MHz</b>
Testing authority	<b>FORCE TECHNOLOGY</b>
Certification program	<b>EC VERIFIED, Component Level</b>

## Supported protocols

	10BASE-T	100BASE-TX	1000BASE-T	2.5GBASE-T	5GBASE-T	10GBASE-T
Supported by the SXKD-7-SSTP-LSOHFR-B2 <sub>ca</sub> cable	YES	YES	YES	YES	YES	YES



## Supported PoE types

	802.3af	802.3at	802.3bt	802.3bt
PoE type	Type 1	Type 2	Type 3	Type 4
Maximum current	350 mA	600 mA	600 mA	960 mA
No. of pairs used	2	2	4	4
Supported by the SXKD-7-SSTP-LSOHFR-B2ca cable	YES	YES	YES	YES

## Physical parameters

Cable construction	S/FTP
Number of pairs	4
Pairs colouring	orange, blue, green, brown
Shielding	overall braid and individual foil around each pair (PiMF)
Foil material	Al/Mylar
Braid material	tinned copper wire $\varnothing$ 0.10 mm
Braid coverage	$\geq$ 30%
Conductor type and size	copper wire $\varnothing$ 0.57 mm $\pm$ 0.005 mm (AWG 23)
Conductor insulation	skin-foam-skin PE
Conductor diameter with insulation	1.33 mm $\pm$ 0.05 mm
Conductor material	copper with 99.97% purity
Sheath thickness	0.70 mm $\pm$ 0.05 mm
Sheath colour	orange RAL 2003
Cable diameter	7.8 mm $\pm$ 0.5 mm
Net cable weight	58 kg/km

## Electrical parameters

NVP	79%
Propagation delay	480 ns/100 m
Delay skew	$\leq$ 25 ns/100 m
Dielectric strength	1 kV DC or 0.7 kV AC for 1 min, or 2.5 kV DC or 1.7 kV AC for 2 s
Insulation resistance	$\geq$ 5 000 M $\Omega$ x km
Resistance imbalance	$\leq$ 2%

Electrical parameters of Solarix shielded category 7 cables (at 20 °C).

f (MHz)	Attenuation (dB/100m)	NEXT (dB)	PSNEXT (dB)	Prop. Delay (ns/100m)	ACR-F (dB/100m)	PSACR-F (dB/100m)	Return Loss (dB)
1	1.96	98.22	96.47	479.69	92.01	89.29	32.15
4	3.55	98.45	96.63	462.20	94.10	90.15	34.86
8	4.92	99.07	95.11	457.08	92.04	87.80	36.92
10	5.49	98.60	95.06	455.77	89.01	86.57	40.24
16	7.01	99.49	96.52	453.46	87.03	83.49	39.79
20	7.91	97.23	95.86	452.53	88.22	85.63	42.29
25	8.92	97.96	95.89	451.71	84.24	81.75	41.44
31.25	10.05	98.64	96.82	450.97	83.40	81.59	41.75
62.5	14.39	96.18	93.18	449.14	78.01	74.47	36.67
100	18.22	97.26	93.39	448.21	75.83	71.53	37.54
200	26.02	96.49	94.12	447.18	60.74	57.83	33.34
250	29.18	95.04	91.54	446.92	61.21	57.76	37.69
300	32.10	92.84	90.28	446.73	58.66	55.13	29.27
400	37.50	91.83	89.70	446.46	43.60	41.58	30.36
500	42.18	94.49	91.54	446.27	42.92	39.76	27.87
600	44.19	83.14	81.92	446.07	43.51	41.25	25.62
1 000	59.32	67.34	65.20	444.93	38.05	35.07	22.33

## Installation and storage

Min. bending radius during installation	4x cable diameter
Max. tensile strength	100 N (4x 25 N/pair)
Segregation classification	type d according to EN 50174-2
Temperature during installation	0 to 50 °C
Operating temperature	-20 to 60 °C
Storage temperature	-20 to 60 °C


## Logistic parameters

Length	500 m/reel
Number of reels per pallet	27
Reel size (Ø x v)	380 x 390 mm
Pallet dimensions (w x d x h)	1140 x 1140 x 1280 mm
Pallet weight	868 kg
Batch and product numbers barcode	IDAutomation Code 39, ANSI/ISO/AIM specification
EAN barcode	EAN-13

## Cable label


**CE**  
0200

Product Code:  
Kód produktu:  
Kod výrobu:



\* 2 7 0 0 0 0 1 0 \*

Batch No.:  
Číslo šarže:  
Numer partii:



\* 1 0 1 7 1 6 4 5 \*


**SOLARIX**

INTELEK LTD, Dimophontos 1, Lamda Tower  
1075 Nicosia, CY, HE 438609  
17

DoP: M403-SXKD-7-SSTP-LSOHFR-B2ca-01

EN 50575:2014 including A1:2016

**SXKD-7-SSTP-LSOHFR-B2ca**  
Installation Cable/Instalační kabel/Kabel instalacyjny  
Solarix CAT7 SSTP LSOHFR B2<sub>ca</sub>-s1,d1,a1 500m



8 595684 701043

Electric cable intended for supply of communication in buildings and other civil engineering works with the objective of limiting the generation and spread of fire and smoke./Kabel určený pro komunikaci v budovách a dalších inženýrských stavbách s cílem omezení vzniku a šíření požáru a kouře./Kabel przeznaczony do komunikacji w budynkach i innych obiektach budowlanych w celu ograniczenia powstawania oraz rozprzestrzenienia się ognia i dymu.

Reaction to Fire/Reakce na oheň/Reakcja na ogień: B2<sub>ca</sub>-s1,d1,a1  
Dangerous Substances/Nebezpečné látky/Niebezpieczne substancje: NPD

## Solarix warranties

Standard warranty	5 years
System warranty	30 years

## RoHS and REACH

RoHS	does not contain any of the substances listed in Annex II of the EU directive no. 2015/863
REACH	does not contain any of the substances from the ECHA list





This cable complies with the directive of the Ministry of the Interior no. 23/2008 resp. no. 268/2011 on technical conditions of fire protection of buildings and, therefore, is suitable for applications defined in Annex 2 of the above directives for the use of cables with the B2<sub>cs</sub>-s1,d1,a1 reaction to fire class. This Solarix cable has been tested in accordance with the EU regulation no. 305/2011 (i.e. CPR) by a notified body in the AVCP 1+ system.

We recognize the importance of regular checks of Solarix products that customers use in their networks. That is why we have the electrical parameters of our cables and connecting hardware tested by independent laboratories. Certificates issued by these authorities are an important part of our Solarix product support and guarantee products reliability to our customers. This is also true for the SXXD-7-SSTP-LSOHFR-B2ca cable, which has been tested by the FORCE TECHNOLOGY laboratory as part of the EC VERIFIED certification program.

## Related products

Product Number	Type Number	Description
24000100	SX24M-0-STP-BK-UNI-N	Unloaded Patch panel Solarix 24 port Black 1U
25286902	SXKJ-10G-STP-BK-SA	10G Keystone Solarix CAT6A STP RJ45 Black Toolless
25286903	SXKJ-10G-STP-BK-NA	10G Keystone Solarix CAT6A STP Black
25286912	SXKJ-10G-STP-BK-SA	MULTIPACK 24 pcs - 10G Keystone Solarix CAT6A STP Toolless
25286913	SXKJ-10G-STP-BK-NA	MULTIPACK 24 pcs - 10G Keystone Solarix CAT6A STP Black
28770059	C6A-315GY-0,5MB	10G Patch Cable CAT6A SFTP LSOH 0,5m Grey Non-Snag-Proof
28770109	C6A-315GY-1MB	10G Patch Cable CAT6A SFTP LSOH 1m Grey Non-Snag-Proof
28770209	C6A-315GY-2MB	10G Patch Cable CAT6A SFTP LSOH 2m Grey Non-Snag-Proof
28770309	C6A-315GY-3MB	10G Patch Cable CAT6A SFTP LSOH 3m Grey Non-Snag-Proof
28770509	C6A-315GY-5MB	10G Patch Cable CAT6A SFTP LSOH 5m Grey Non-Snag-Proof
28770709	C6A-315GY-7MB	10G Patch Cable CAT6A SFTP LSOH 7m Grey Non-Snag-Proof
28771009	C6A-315GY-10MB	10G Patch Cable CAT6A SFTP LSOH 10m Grey Non-Snag-Proof
28771509	C6A-315GY-15MB	10G Patch Cable CAT6A SFTP LSOH 15m Grey Non-Snag-Proof
28772009	C6A-315GY-20MB	10G Patch Cable CAT6A SFTP LSOH 20m Grey Non-Snag-Proof

